


# USER INSTRUCTIONS

## ECO Safe Charge™

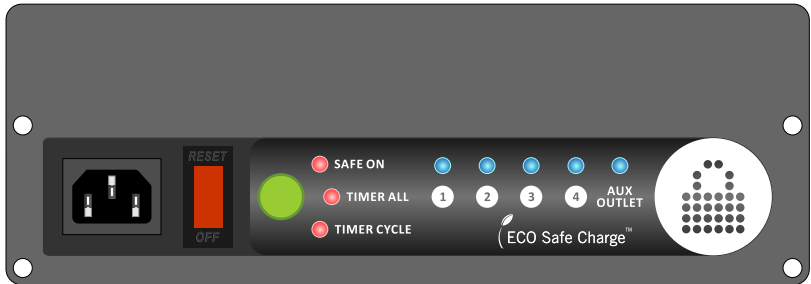

### ECO SAFE CHARGE™ POWER MANAGEMENT UNIT MODEL NO.: ELE00058-01

Rated: 220-250Vac 50Hz, 10A 2500W Maximum  
Complies with Safety Standards: EN 60950-1, AS/NZS 60950.1



### ECO SAFE CHARGE™ REMOTE CONTROL UNIT MODEL NO.: ELE1908 or ELE1910

Transmission Radio Frequency 433.92 MHz  
Transmission Range: 30 meters in open air  
Battery: 1 x CR2032 3.0 Vdc  
Conforms to EMC and R&TTE Directives



## ECO SAFE CHARGE™ Power Management System


The remote controlled ECO Safe Charge™ Power Management System has the capabilities to charge multiple laptops and power other electrical equipment safely and efficiently. The intelligent ECO Safe Charge™ Power Management System provides four essential functions:

- 1. SAFE-ON:** sequentially stages power to each group of outlets, reducing the possibility of a momentary electrical Overload when multiple laptops are first powered on.
- 2. ECO-TIMER-ALL:** sequentially stages power to each group of outlets but automatically turns the power off after a selected time has elapsed. Use this mode to quickly charge all laptops if it is permissible to charge them together without causing a general electrical overload.
- 3. ECO-TIMER-CYCLE:** individually powers each group of outlets at a time for the duration selected then automatically turns power off before applying power to the next group of outlets until it has cycled through all groups of outlets. Use this mode to prevent a general electrical overload if all the laptops require more power than is permitted to be Supplied to all laptops together.
- 4. SAFE-OFF:** this function turns off all outlets.

Using the ECO-TIMER™ functions gives you the possibility of reducing your energy consumption, reduce carbon emissions, extend the life of your laptop batteries and reduce your power bills.

For more information visit [www.lockncharge.com](http://www.lockncharge.com) (international) or [www.pclocs.com.au](http://www.pclocs.com.au).

This ECO Safe Charge Power Distribution Unit has four controlled outlet and one Always-On Aux outlet.

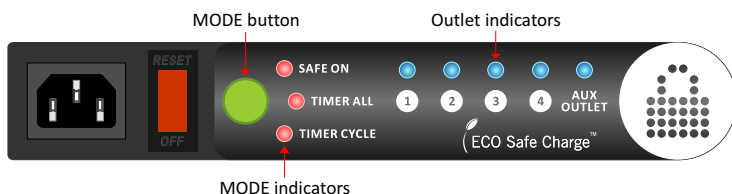

### PAIR THE REMOTE TO THE POWER DISTRIBUTION UNIT

1. Pressing and holding down the MODE button for more than 3 seconds in SAFE-OFF mode will put the Power Distribution Unit into pairing procedure.
2. The SAFE ON indicator will flash quickly when you are in pairing procedure. If there is no valid ID received within 20 seconds, the Power Distribution Unit will exit from the pairing procedure and pairing will need to be re-done.
3. Pressing any button on the remote control will send its ID to the Power Distribution Unit and overwrite any previous ID stored. The SAFE ON indicator will then turn OFF and your Remote Control will now be paired to the Power Distribution Unit.

#### Notes:

- o One Remote Control can be paired with multiple Power Distribution Units.
- o One Power Distribution Unit can only be paired with one Remote Control.
- o The state of the MODE indicators and outlets are unchanged during pairing.
- o The stored ID will survive removal and replacement of the Remote Control battery and power loss to the Power Distribution Unit.

#### Tips for using the Remote Control:

- o Line of sight from the Remote Control to the Power Distribution Unit is not required. The control signal can pass through walls and ceilings.
- o As with all RF transmitter devices, electrical fields, metal doors and motor devices can decrease the strength of the transmit control signal. Reorienting the Remote Control may increase the control range.
- o It is not guaranteed that every control signal sent out by the Remote Control will be received by the Power Distribution Unit. Check to make sure that the related appliances have responded after your press any button on the Remote Control.
- o Do not press the button on the Remote Control too rapidly.

## USING THE POWER DISTRIBUTION UNIT WITH THE REMOTE CONTROL

1. Pressing the SAFE-ON button on the Remote Control will turn ON the four controlled outlets sequentially and will remain on until any other mode is set. The SAFE ON indicator illuminates.
2. Pressing the 1HR-ALL or 3HR-ALL buttons on the Remote Control will activate ECO-TIMER\_ALL mode.
  - a) All groups of outlets will turn on sequentially and will turn off automatically after one or three hours has elapsed respectively.
  - b) The TIMER ALL indicator will flash the number of times corresponding to the specific button pressed to reflect the timer duration. ie pressing the 3HR-ALL button will result in three flashes, corresponding to a 3-hour timer duration.
3. Pressing the 1HR CYCLE or 3HR CYCLE buttons on the Remote Control will activate ECO-TIMER-CYCLE mode. This function cycles each controlled outlet on the Power Distribution Unit, giving it a set amount of charge time.
  - a) The time duration is determined by the specific CYCLE button pressed. ie 1HR-CYCLE button corresponds to 1-hour timer duration,
  - b) When the timer duration has elapsed the group of outlets will be turned OFF and the next consecutive group of outlets will turn ON automatically.
  - c) The CYCLE ALL indicator will flash the number of times corresponding to the specific CYCLE button pressed to reflect the timer duration. ie pressing the 3HR-CYCLE button will result in three flashes, corresponding to a 3-hour timer duration.
4. Pressing the SAFE-OFF button on the Remote Control will put the Power Distribution Unit into SAFE-OFF mode cancelling any other mode.

## USING THE POWER DISTRIBUTION UNIT WITHOUT THE REMOTE CONTROL

Setting the operating mode without the Remote Control:

1. Pressing the MODE button consecutively will cycle the Power Distribution Unit through its different operating modes in this sequence: SAFE-ON to ECO-TIMER-ALL to ECO-TIMER-CYCLE to SAFE-OFF and repeating from the start.
2. The MODE indicators will indicate the operating mode of Power Distribution Unit:
  - a) In SAFE-ON mode, the SAFE ON indicator will illuminate continuously.
  - b) In ECO-TIMER-ALL mode, the TIMER ALL indicator will flash the number of times corresponding to the programmed timer duration. Eg Three flashes indicates a 3-hour setting.
  - c) In ECO-TIMER-CYCLE mode, the CYCLE ALL indicator will flash the number of times corresponding to the Programmed timer duration. Eg One flash indicates a 1-hour setting.

*NOTE: The outlet indicator will show the outlet that is ON;*

- o If the outlet is powered OFF the outlet indicator will be OFF.*
- o If the outlet is powered ON, the outlet indicator will be ON.*

- d) In SAFE-OFF mode, all three MODE indicators will be OFF.

## SETTING THE PROGRAMMED TIMER DURATION IN ECO-TIMER-ALL OR ECO-TIMER-CYCLE MODES:

1. When the Power Distribution Unit is in ECO-TIMER-ALL mode, pressing and holding the MODE button on the Power Distribution Unit for 3-seconds will allow the programmed timer duration to be changed.
2. After 3-seconds have elapsed the TIMER ALL indicator will flash quickly.
3. Continuing to hold the MODE button down will cycle the programmed timer duration through this sequence, pausing for 3-seconds between each duration option;
  - o 1-hour (#1 outlet indicator will illuminate),
  - o 2-hours (#2 outlet indicator will illuminate),
  - o 3-hours (#3 outlet indicator will illuminate),
  - o 4-hours (#4 outlet indicator will illuminate), and repeat from the start.
4. Release the MODE button on the desired Time setting. Eg If you want the ECO-TIMER-ALL to charge for 2 hours, release the MODE button when #2 outlet indicator is illuminated.
5. The TIMER ALL indicator will flash the number of times corresponding to the number of hours programmed. Eg Two flashes indicate a two hour setting.
6. The programmed timer duration will survive any loss of power.

## SAFETY INSTRUCTIONS

For your safety - Discard the Power Distribution Unit if the enclosure is damaged.

To reduce the risk of fire, electrical shock and/or injury, the following basic precautions should be followed:

- o This device is not intended for use by persons (including children) with reduced physical, sensory and mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instructions concerning the use of the device by a person responsible for their safety.
- o Children should be supervised to ensure that they do not play with this device.
- o For indoor use only. Keep away from all sources of water or moisture. Never expose the devices to the rain or dangerous gas.
- o Do not overload. The maximum resistive load is 10Amps, 2500W.
- o Before using this device, check and make sure the electrical appliances are correctly and properly connected and installed according to the requirements of those appliances.
- o Remove the power supply from the C14 AC inlet before cleaning.
- o Do not operate any appliance with damaged cord or plug.
- o Do not try to repair, disassemble or modify this device. There are no user-serviceable parts inside.
- o Do not use this device other than for its intended use.
- o This device is intended to be connected to a 220-250V a.c., 50Hz and grounded power supply only.
- o Arrange the power cord away from traffic areas where it will not be tripped over.
- o This device may be warm during working. Keep it in a dry and cool place and do not cover.
- o Although the outlets are OFF, this device is powered when the main supply is connected and switched on.

## **WARRANTY**

PC Locs/LocknCharge warrants the product to be free of defects in design, materials, assembly and craftsmanship from the date of purchase to the original retail purchaser. Evidence of original purchase will be required to obtain warranty service. In the event that a defect, malfunction or failure occurs or is discovered during the warranty period, PC Locs/LocknCharge will repair or replace, at its option, the products which in the reasonable judgment of PC Locs/LocknCharge are deemed defective. All transportation costs shall be borne by the owner and the risk of loss shall be upon the party initiating the transportation. The warranty does not apply to any product that has been subject to misuse, tampering, neglect, or accident or as a result of unauthorized alterations or repairs to the product. The warranty is in lieu of all warranties expressed or implied, including the implied warranties of merchantability and fitness for a particular purpose which are expressly excluded or disclaimed. In no event will PC Locs/LocknCharge, their directors, officers, employees, or agents be liable for any harm, consequential, incidental, third party, special or indirect damages whatsoever arising out of the use or inability to use the products even if PC Locs/LocknCharge has been advised of the possibility of such damages.

PC Locs/LocknCharge obligation is strictly and exclusively limited to the replacement or repair of any defective products. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

## **COMPLIANCE STANDARDS**

The ECO Safe Charge™ Power Distribution Unit conforms to Safety Standards: EN 60950-1, AS/NZS 60950.1  
The Surge protection component built-in is UL listed to UL 1449

Equipment within the scope of subclass 20, but capable also of operating at 10mW across the whole of the frequency band is not to be considered as a Class 1 device. They can be operated in the EU without restrictions indoor, but can not be operated outdoors in France in the whole of the band until further notice. They have to be marked with the alert sign accordingly. Member states have however agreed, that they do not need to be notified to member states under article 6.4 of Directive 1999/5/EC, provided that users are informed about the restrictions of use.

**CAUTION:**RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.