



BlueWave® AX-550

Recipe Storage Upgrade

Recipe storage is a new feature of BlueWave® AX-550 firmware version 2.5. This feature allows the user to save up to eight (8) different recipes and recall these recipes when needed. Each recipe is combined with TIME and POWER setting.

1. The recipe storage feature is available in admin mode only. Refer to the user guide on how to enter admin mode. In admin mode, there is an additional folder icon next to lock icon (Figure 1).
2. Turn the rotary push-button to move the highlighted cursor (blue) on to the folder icon. Turning the rotary push-button back and forth will allow the cursor to scroll through the main interface screen along the path shown by the red arrow in Figure 2.



Figure 1. Admin Mode

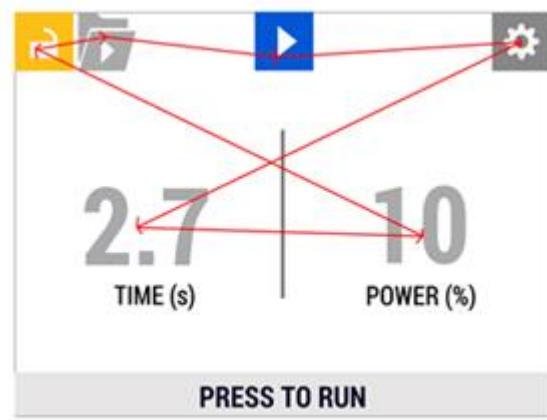


Figure 2. Cursor Path

3. When the cursor is on top of the folder icon, the lower bar should read "PRESS TO LOAD/SAVE" (Figure 3).
4. Press the rotary push-button when the cursor is on the folder icon.
5. The recipes screen will appear (Figure 4). Eight recipes will be visible with their TIME and POWER parameters.

NOTE: All zeros in initial firmware install.

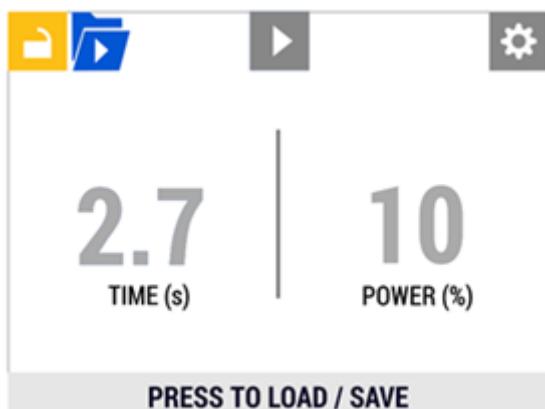


Figure 3. LOAD/SAVE

Recipe	Time	Power	
1	30.5	55	SAVE LOAD
2	30.5	55	SAVE LOAD
3	300.5	55	SAVE LOAD
4	30.5	55	SAVE LOAD
5	300.5	55	SAVE LOAD
6	30.5	55	SAVE LOAD
7	30.5	55	SAVE LOAD
8	300.5	55	SAVE LOAD

Figure 4. Recipes

6. In the recipes screen, rotating the pushbutton will navigate the highlight cursor through the screen along the path shown by the red arrows in Figure 5. The cursor toggles between **SAVE**, **LOAD** and **BACK** (the up arrow).
7. When the cursor is on **SAVE**, the bottom bar should read "PRESS TO SAVE " (Figure 6). Pressing the rotary push-button will save the current setting on the main screen into the selected recipe. The **Time** and **Power** value on the screen will be overwritten to the current setting.

Recipe	Time	Power	SAVE LOAD
1	30.5	55	SAVE LOAD
2	30.5	55	SAVE LOAD
3	300.5	55	SAVE LOAD
4	30.5	55	SAVE LOAD
5	300.5	55	SAVE LOAD
6	30.5	55	SAVE LOAD
7	30.5	55	SAVE LOAD
8	300.5	55	SAVE LOAD

PRESS TO LOAD / SAVE

Figure 5. Navigation

Recipe	Time	Power	SAVE LOAD
1	30.5	55	SAVE LOAD
2	30.5	55	SAVE LOAD
3	300.5	55	SAVE LOAD
4	30.5	55	SAVE LOAD
5	300.5	55	SAVE LOAD
6	30.5	55	SAVE LOAD
7	30.5	55	SAVE LOAD
8	300.5	55	SAVE LOAD

PRESS TO SAVE

Figure 6. Press to Save

8. After pressing **SAVE**, the "SAVE SUCCESS" screen will show for approximately 1.5 seconds (Figure 7).
9. When the cursor is on **LOAD**, the bottom bar should read "PRESS TO LOAD" (Figure 8). Pressing the rotary push-button will load the **Time** and **Power** value in the selected recipe to current setting. User can see the **Time** and **Power** value changed when they return to the main screen.



Figure 7. Save Success

Recipe	Time	Power	SAVE LOAD
1	30.5	55	SAVE LOAD
2	30.5	55	SAVE LOAD
3	300.5	55	SAVE LOAD
4	30.5	55	SAVE LOAD
5	300.5	55	SAVE LOAD
6	30.5	55	SAVE LOAD
7	30.5	55	SAVE LOAD
8	300.5	55	SAVE LOAD

PRESS TO LOAD

Figure 8. Press to Load

10. After pressing **LOAD**, the "LOAD SUCCESS" screen will show for approximately 1.5 seconds (Figure 9).
11. When the cursor is on **BACK**, pressing the rotary push button will go back to the recipes screen (Figure 10).



Figure 9. Load Success

Recipe	Time	Power	
1	30.5	55	SAVE LOAD
2	30.5	55	SAVE LOAD
3	300.5	55	SAVE LOAD
4	30.5	55	SAVE LOAD
5	300.5	55	SAVE LOAD
6	30.5	55	SAVE LOAD
7	30.5	55	SAVE LOAD
8	300.5	55	SAVE LOAD

PRESS TO LOAD / SAVE

Figure 10. Back

12. Pressing the rotary push-button again when the cursor is on the **BACK** button in the recipes screen you will go back to the main menu (Figure 11).



Figure 11. Main Menu (Admin Mode)

www.dymax.com

Americas

USA | +1.860.482.1010 | info@dymax.com

Europe

Germany | +49 611.962.7900 | info_de@dymax.com

Ireland | +353 21.237.3016 | info_ie@dymax.com

Asia

Singapore | +65.67522887 | info_ap@dymax.com

China | +86.755.83485759 | dymaxasia@dymax.com

Hong Kong | +852.2460.7038 | dymaxasia@dymax.com

Korea | +82.31.608.3434 | info_kr@dymax.com

©2020-2021 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by, Dymax Corporation, U.S.A.

Technical data provided is of a general nature and is based on laboratory test conditions. Dymax does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use, is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than Dymax or act as a grant of license under any Dymax Corporation Patent. Dymax recommends that each user adequately test its proposed use and application before actual repetitive use, using the data contained in this bulletin as a general guide. QS095DA 11/9/2021