

**1. Go to a desktop computer / laptop. Do not work with a smartphone**

Smartphone can not be used since it will always push to use the App which does not support access to the required setting change


**2. Open a browser (Chrome, Safari, Edge, ..) which you usually use to access the Internet.**

**3. Type into address bar of the browser 192.168.0.1**




**4. Sign in with the password on the bottom of the router**


If the password is not working or if you do not know the password, follow the password reset procedure of your router.

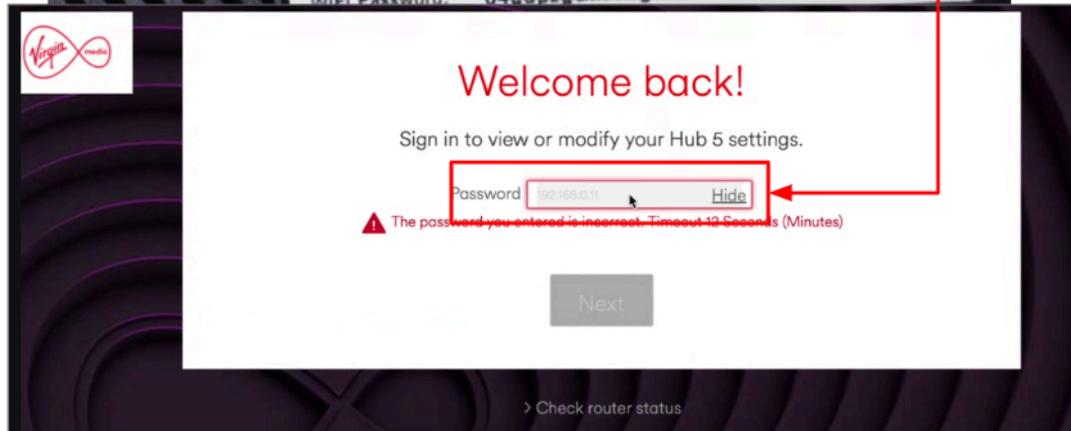

5. Click on “Advanced Settings” in the main menu

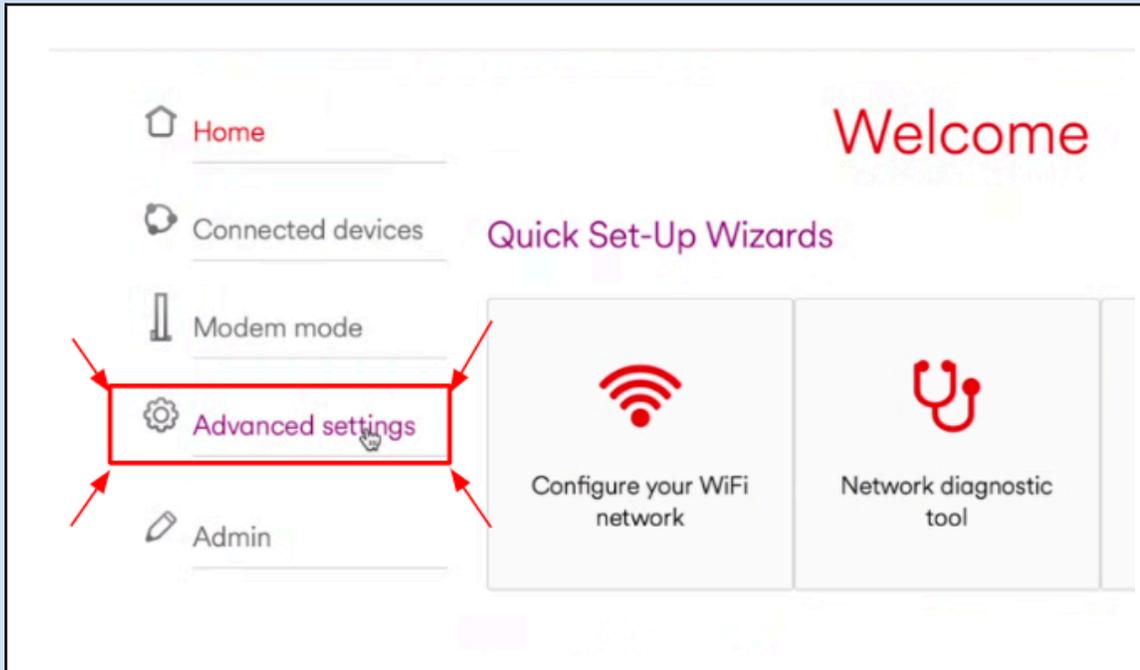

6. Click in the menu first on “Wireless” and second on “Wireless signal”

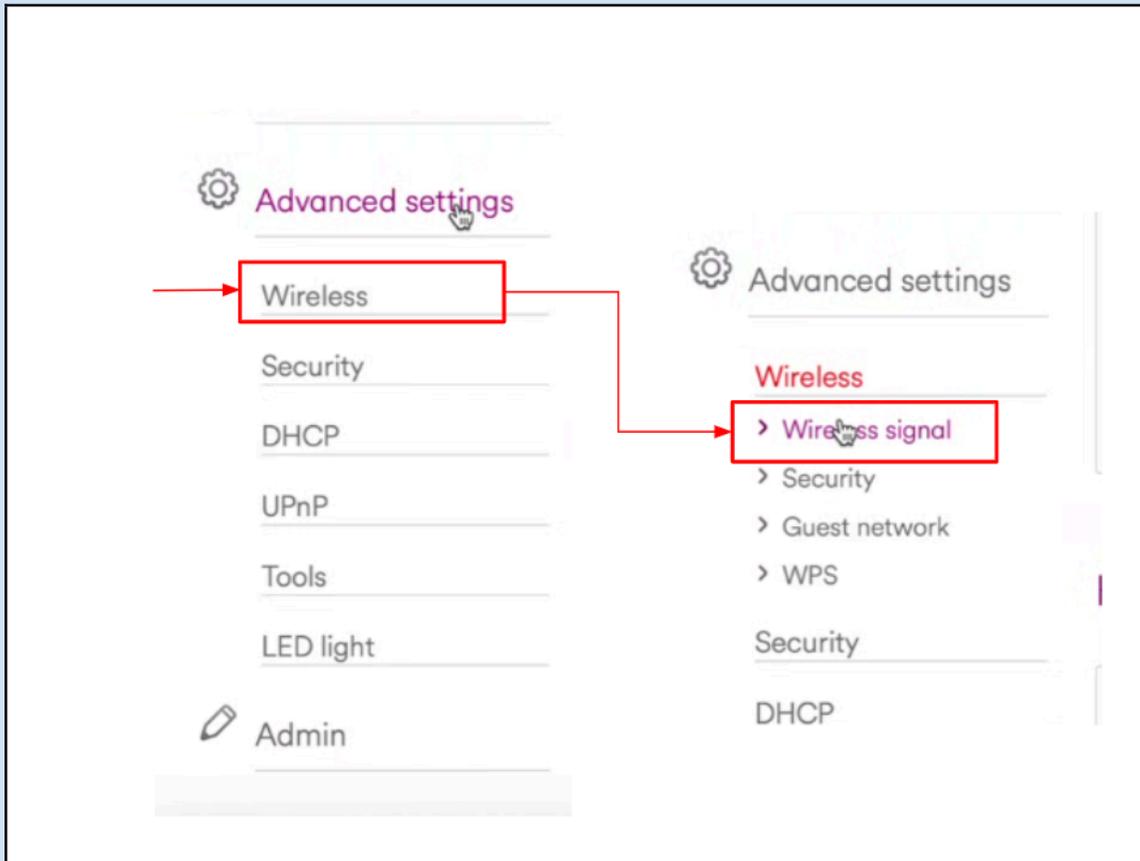

7. Disable Channel Optimization and click on “Apply Changes” . The router will restart with the new setting. It might be required to repeat this step a second time. Only if “Channel Optimization” is disabled, proceed with step 8.

**Wireless frequency 5GHz**

Enable 5 GHz       Disable 5 GHz

Wireless mode: 802.11a/n/ac/ax mixed

Channel:  Manual  Auto      Channel 124

Channel width: 20/40/80/160 MHz

**Smart WiFi**

Enable Channel Optimization       Disable Channel Optimization

**Apply changes**

8. Disable 5GHz and click on Apply

**Wireless frequency 5GHz**

Enable 5 GHz       Disable 5 GHz

Wireless mode: 802.11a/n/ac/ax mixed

Channel:  Manual  Auto      Channel 124

Channel width: 20/40/80/160 MHz

**9. Go to your tado° App and complete the Smart Thermostat Installation**

Start in the tado° App with scanning of the Smart Thermostat you would like to add and follow the commissioning instructions in the tado° App.

**10. If you are done with your tado° Installation you can activate the old setting in your router again. This will not impact the operation of the tado° App going forward. It is only required during the installation to change this setting.**