




## COYOTE® 6" PEDESTAL FLIP TRAY KIT

### INSTALLATION INSTRUCTIONS



#### IMPORTANT SAFETY INFORMATION

**READ AND COMPLETELY UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLING PRODUCT. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY OR DEATH.**

This product is intended for use by trained technicians only. This product should not be used by anyone who is not familiar with and not trained to use it. When working in the area of energized lines, extra care should be taken to prevent accidental electrical contact. Be sure to wear proper safety equipment per your company protocol. These instructions are not intended to supersede any company construction or safety standards. These instructions are offered only to illustrate safe installation for the individual. PLP products are intended for the specified application only. Do not modify this product under any circumstances. Do not reuse or reinstall any PLP product unless that capability is expressly indicated in the product's Installation Instructions. For proper performance and personal safety, be sure to select the proper PLP product before installation. PLP products are precision devices. To ensure proper performance, they should be stored in cartons under cover and handled carefully.

#### PACKAGE COMPONENTS




1. Flip Tray Tower (1)
2. Flip Tray Spacer (1)
3. Screw, #6 x 1/2" (2)
4. Hold Down Strap (1)


#### Tools Required:

- Fiber Optic Cable Opening Tools
- Phillips Head Screwdriver


- 1 Install the flip tray spacer to the organizer by aligning the brackets with the features in the organizer as shown.

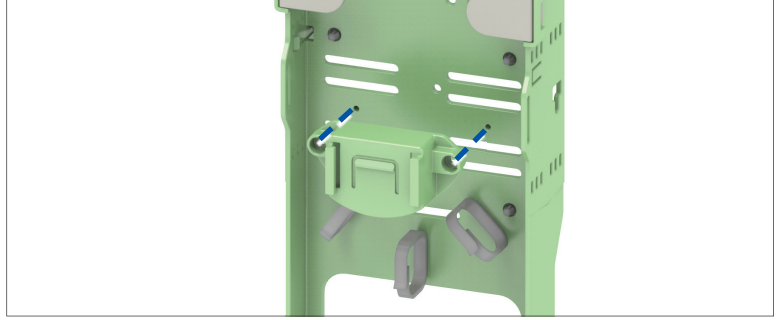

- 2 Secure the flip tray spacer to the organizer using the screws provided.

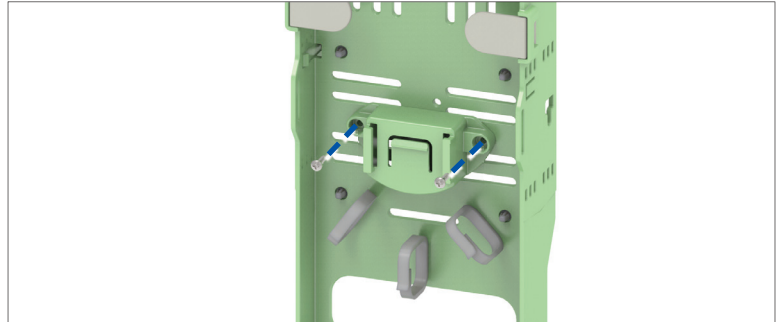


- 3 Install the flip tray tower onto the spacer by sliding it into the slots of the spacer. The tower is fully engaged into the spacer when the top of the tower is flush with the top of the spacer.

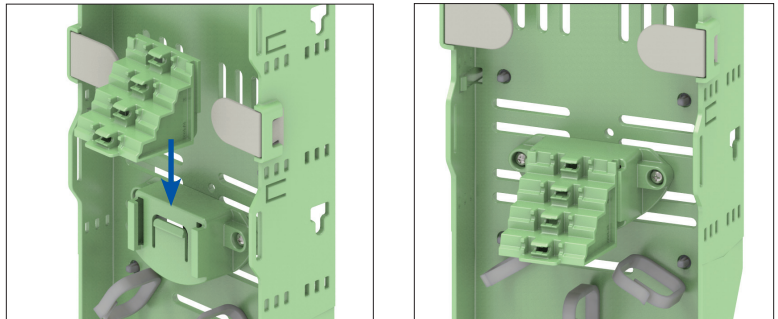


- 4 Firmly press the splice tray into the first tray position on the flip tray tower.

**NOTE:** The first thin profile tray should be installed at the position closest to the organizer as shown in the image.

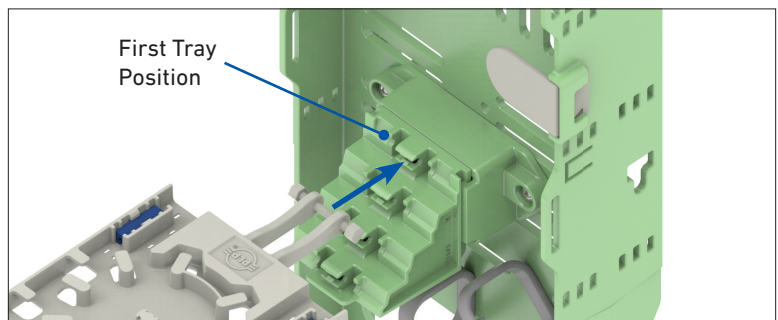


5

Route the buffer tube(s) to the tray(s) and secure them to the flip tray(s) according to the installation instructions provided with each tray.

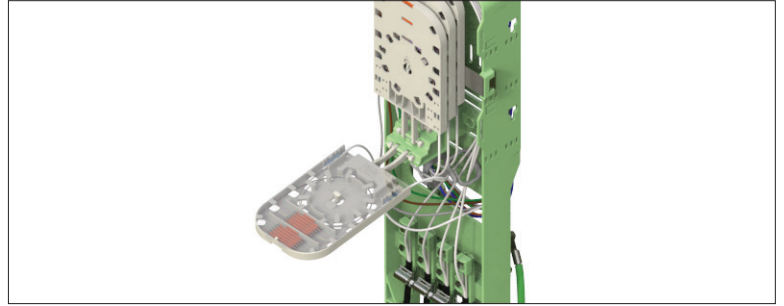


6

Route the fibers on the flip tray according to the installation instructions included with the tray kit. Splice the fibers according to your standard company practices.

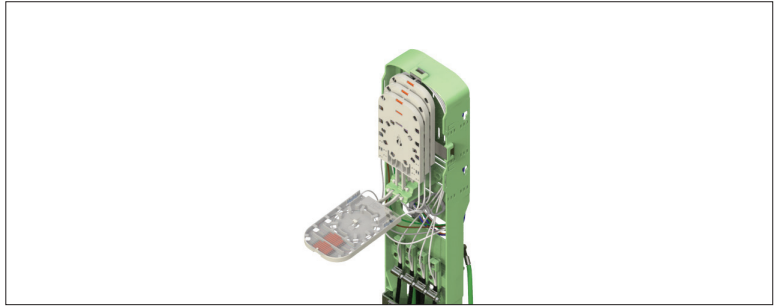


7

Secure the flip tray(s) to the organizer with the hold down strap.

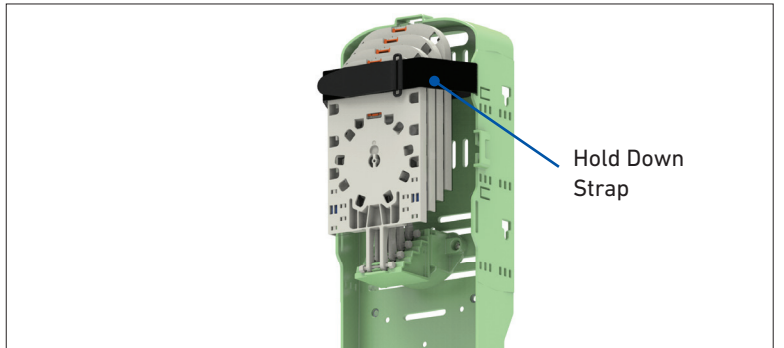

APPENDIX

COYOTE® Splice Tray Capacity Chart for COYOTE 6" Pedestal

PLP Catalog Number	Description	Image	Splice Type	Max Trays per Closure	Closure Max Splice Capacity
STPXL-TK-002	Flip Thin Profile (24 CT)		Single Fusion (Double Stack)	4	96



**GLOBAL HEADQUARTERS**  
660 BETA DRIVE  
CLEVELAND, OH 44143

+1 440 461 5200  
INFO@PLP.COM  
PLP.COM