




COYOTE® PEDESTAL ADAPTER BULKHEAD KIT

INSTALLATION INSTRUCTIONS

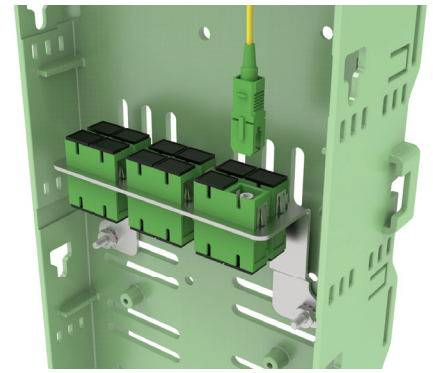


IMPORTANT SAFETY INFORMATION

READ AND COMPLETELY UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLING PRODUCT. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY OR DEATH.


This product is intended for use by trained technicians only. This product should not be used by anyone who is not familiar with and not trained to use it. When working in the area of energized lines, extra care should be taken to prevent accidental electrical contact. Be sure to wear proper safety equipment per your company protocol. These instructions are not intended to supersede any company construction or safety standards. These instructions are offered only to illustrate safe installation for the individual. PLP products are intended for the specified application only. Do not modify this product under any circumstances. Do not reuse or reinstall any PLP product unless that capability is expressly indicated in the product's Installation Instructions. For proper performance and personal safety, be sure to select the proper PLP product before installation. PLP products are precision devices. To ensure proper performance, they should be stored in cartons under cover and handled carefully.

PACKAGE COMPONENTS

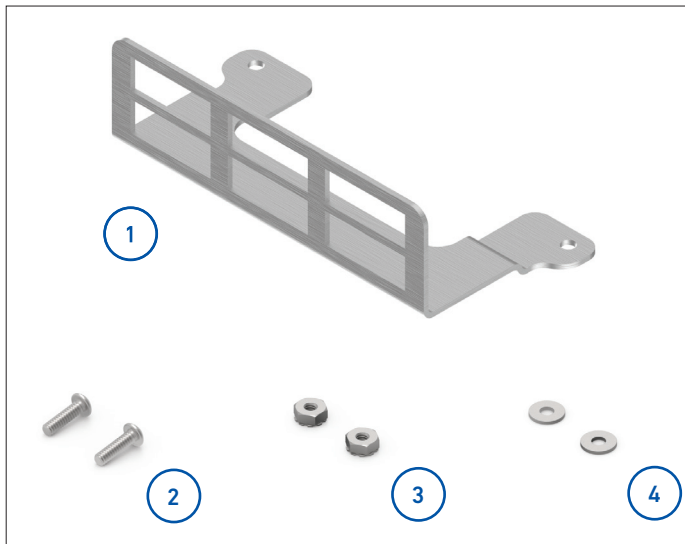

Catalog Number: COYPED-BLKHD12P

1. 12-Port Bulkhead Bracket (1)
2. Bolts, #6-32 x 1/2" (2)
3. Keps Nuts, #6-32 (2)
4. Flat Washer, #6 (2)

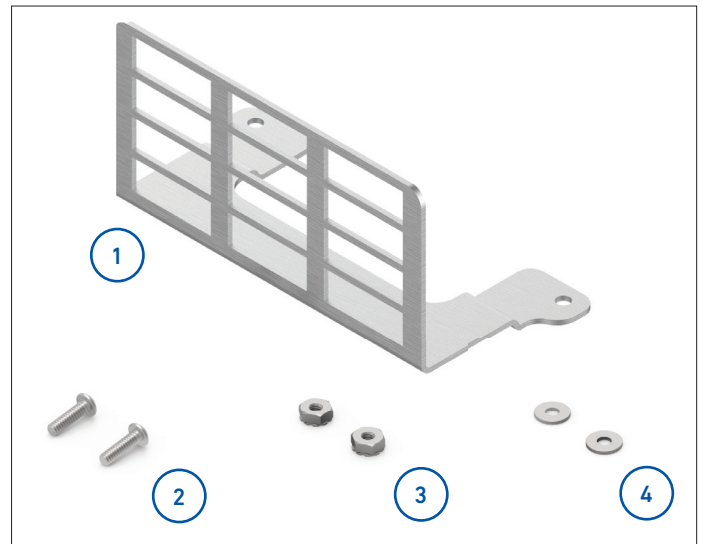

Catalog Number: COYPED-BLKHD24P


1. 24-Port Bulkhead Bracket (1)
2. Bolts, #6-32 x 1/2" (2)
3. Keps Nuts, #6-32 (2)
4. Flat Washer, #6 (2)

Tools Required:


- Fiber Stripper
- Snips
- Felt
- Tie Wraps
- Pen or Marker

NOTE: Installation for both the 12 and 24-Port Adapter Bulkhead kits is the same. The following shows the installation of the 12-Port Adapter Bulkhead kit:


- 1 Install duplex SC or quad LC flangeless adapters in the bulkhead bracket.

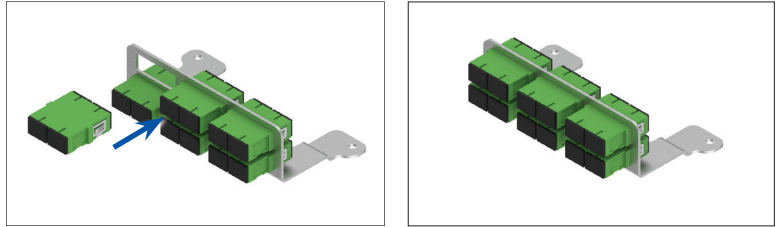


- 2 Align the hole in the bracket with the horizontal slots on the pedestal universal organizer.

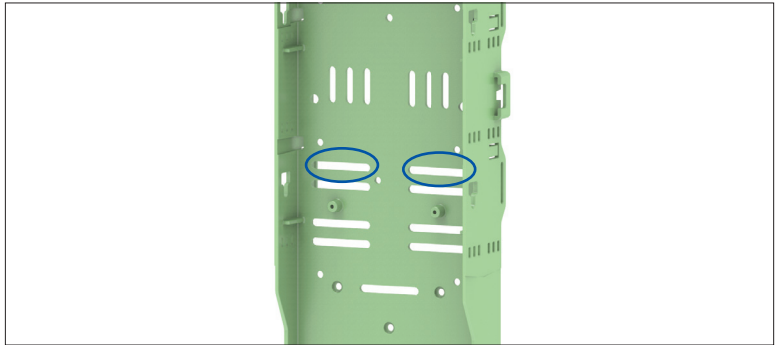


- 3 Attach the adapter bulkhead bracket to the universal organizer using the hardware provided.

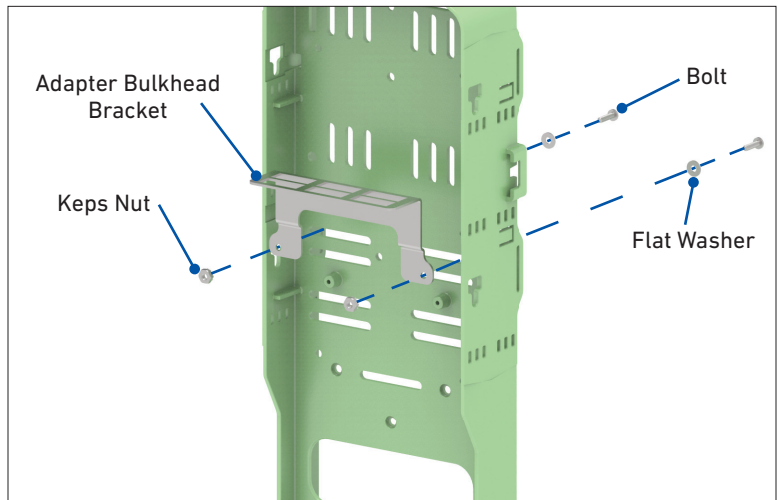

- 4 Route pigtails through the channel to the splice tray.


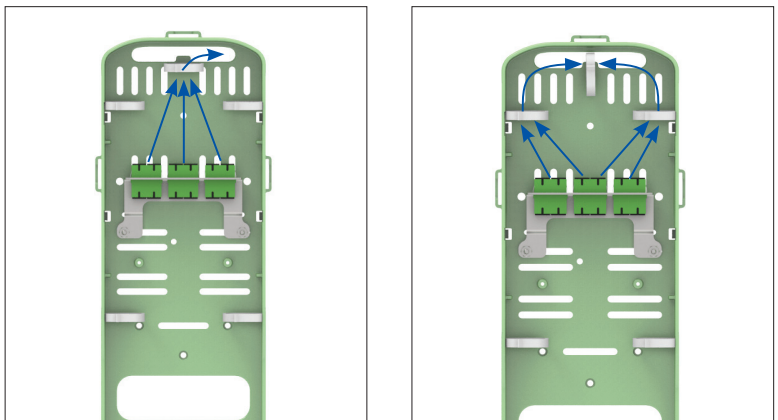


- 5 Secure the pigtails to the splice tray with felt and tie wraps.

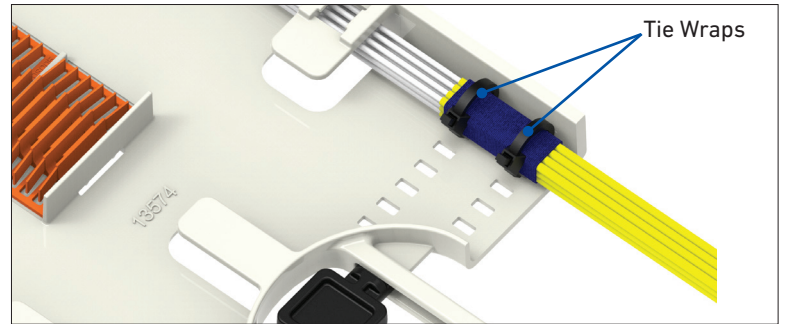

- 6 Route drops to the bulkhead as shown below and install into the adapters.

NOTE: Be sure to follow your company's standard practices when installing connectors into the adapters.

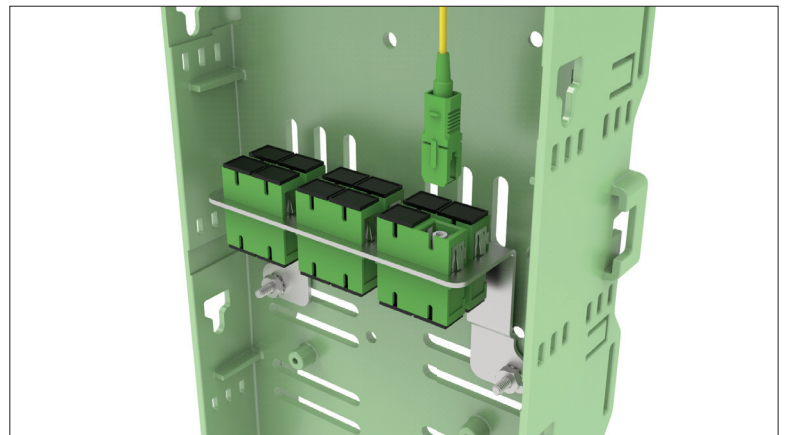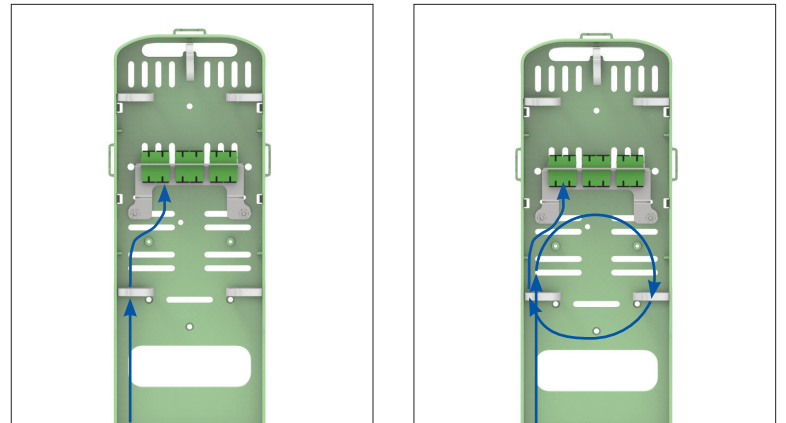

APPENDIX

Catalog Number	Description
COYPED-BLKHD12P	Pedestal Adapter Bulkhead Kit - Accepts (6) Duplex SC or (6) Quad LC Flangeless Adapters
COYPED-BLKHD24P	Pedestal Adapter Bulkhead Kit - Accepts (12) Duplex SC or (12) Quad LC Flangeless Adapters
80813988	Adapter Kit – Includes: (6) SC/APC Flangeless Duplex Adapters
80813989	Adapter Kit – Includes: (6) SC/UPC Flangeless Duplex Adapters
80813990	Adapter Kit – Includes: (6) LC/APC Flangeless Quad Adapters
80813991	Adapter Kit – Includes: (6) LC/UPC Flangeless Quad Adapters
COYTRM-2PK-SCA-SB	Pigtail Kit. Includes: (2) SC/APC 2 mm Jacketed Pigtails with Short Boot Connectors
COYTRM-2PK-SCU-SB	Pigtail Kit. Includes: (2) SC/UPC 2 mm Jacketed Pigtails with Short Boot Connectors
COYTRM-3PK-SCA-SB	Pigtail Kit. Includes: (3) SC/APC 2 mm Jacketed Pigtails with Short Boot Connectors
COYTRM-3PK-SCU-SB	Pigtail Kit. Includes: (3) SC/UPC 2 mm Jacketed Pigtails with Short Boot Connectors
COYTRM-4PK-SCA-SB	Pigtail Kit. Includes: (4) SC/APC 2 mm Jacketed Pigtails with Short Boot Connectors
COYTRM-4PK-SCU-SB	Pigtail Kit. Includes: (4) SC/UPC 2 mm Jacketed Pigtails with Short Boot Connectors
COYTRM-4PK-LCA-SB	Pigtail Kit. Includes: (4) LC/APC 2 mm Jacketed Pigtails with Short Boot Connectors
COYTRM-4PK-LCA-SB	Pigtail Kit. Includes: (4) LC/UPC 2 mm Jacketed Pigtails with Short Boot Connectors
800013979	Fiber Pigtail Kit – Includes (2) 1.5 m SC/APC 900 µm Color Coded Pigtails
800014109	Fiber Pigtail Kit – Includes (2) 1.5 m SC/UPC 900 µm Color Coded Pigtails
800013980	Fiber Pigtail Kit – Includes (3) 1.5 m SC/APC 900 µm Color Coded Pigtails
800014110	Fiber Pigtail Kit – Includes (3) 1.5 m SC/UPC 900 µm Color Coded Pigtails
800015055	Fiber Pigtail Kit – Includes (4) 1.5 m SC/APC 900 µm Color Coded Pigtails
80812558	Fiber Pigtail Kit – Includes (4) 1.5 m SC/UPC 900 µm Color Coded Pigtails
80812983	Fiber Pigtail Kit – Includes (2) 1.5 m LC/APC 900 µm Color Coded Pigtails
80812985	Fiber Pigtail Kit – Includes (2) 1.5 m LC/UPC 900 µm Color Coded Pigtails
80812559	Fiber Pigtail Kit – Includes (4) 1.5 m LC/APC 900 µm Color Coded Pigtails
80812560	Fiber Pigtail Kit – Includes (4) 1.5 m LC/UPC 900 µm Color Coded Pigtails



GLOBAL HEADQUARTERS
660 BETA DRIVE
CLEVELAND, OH 44143

+1 440 461 5200
INFO@PLP.COM
PLP.COM