




COYOTE® 10" PEDESTAL LITE-GRIP® SPLICE TRAY KIT

INSTALLATION INSTRUCTIONS

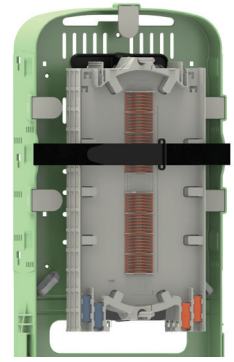


IMPORTANT SAFETY INFORMATION

READ AND COMPLETELY UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLING PRODUCT. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY OR DEATH.

This product is intended for use by trained technicians only. This product should not be used by anyone who is not familiar with and not trained to use it. When working in the area of energized lines, extra care should be taken to prevent accidental electrical contact. Be sure to wear proper safety equipment per your company protocol. These instructions are not intended to supersede any company construction or safety standards. These instructions are offered only to illustrate safe installation for the individual. PLP products are intended for the specified application only. Do not modify this product under any circumstances. Do not reuse or reinstall any PLP product unless that capability is expressly indicated in the product's Installation Instructions. For proper performance and personal safety, be sure to select the proper PLP product before installation. PLP products are precision devices. To ensure proper performance, they should be stored in cartons under cover and handled carefully.

PACKAGE COMPONENTS

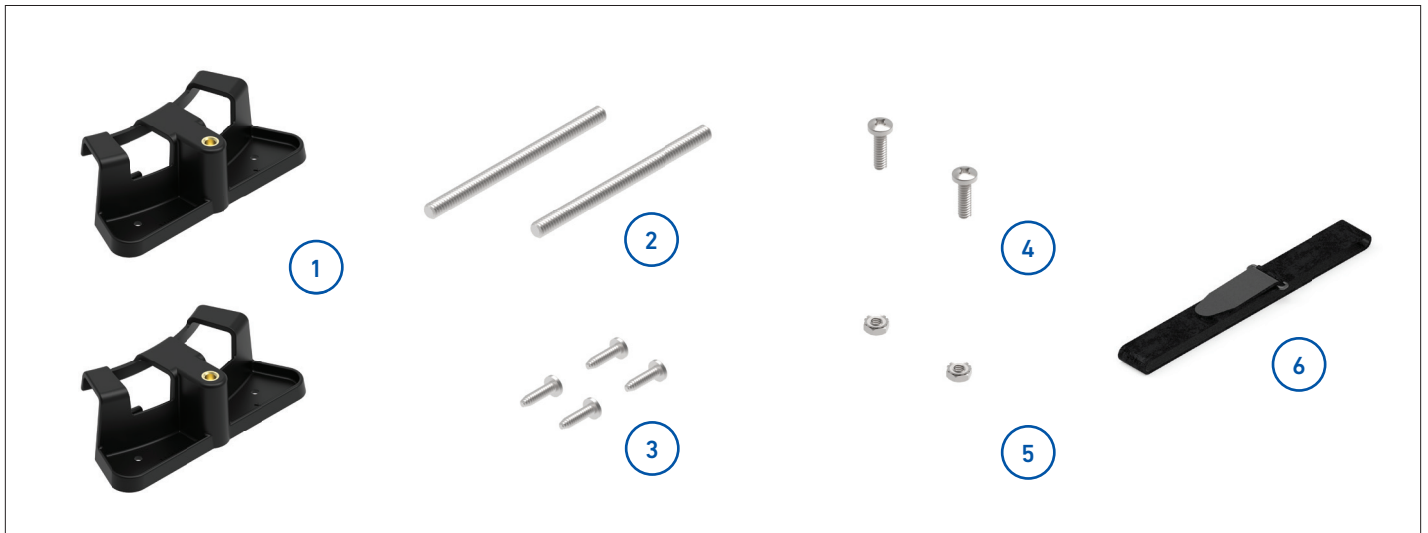

1. Storage Brackets (2)
2. Splice Tray Studs (2)
3. Screw, #6 x 1/2" (4)
4. Bolt, #6 x 1/2" (2)
5. Keps Nut, #6 (2)
6. Hold Down Strap (1)

Tools Required:

- Fiber Optic Cable Opening Tools
- Phillips Head Screwdriver

- 1 Install the storage brackets to the organizer by aligning the brackets with the features in the organizer as shown.



For Short LITE-GRIP Trays




For Long LITE-GRIP Trays

- 2 Secure the brackets to the organizer using the screws provided.

NOTE: If using a long LITE-GRIP splice tray, the lower bracket will be secured with the nuts and bolts provided.



For Short LITE-GRIP Trays

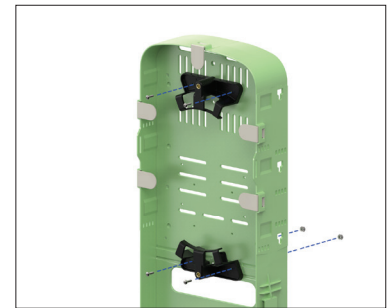


For Long LITE-GRIP Trays


- 3 Install the splice tray studs into the brackets.




- 4 Position a LITE-GRIP splice tray on the tray studs.

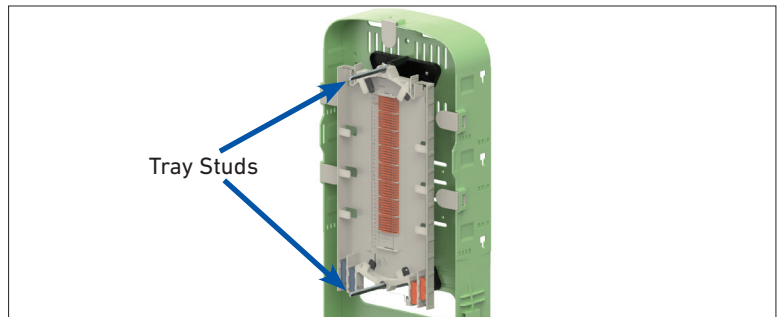


- 5 Route the buffer tube(s) to the splice tray(s) and secure them to the splice tray(s) according to the installation instructions provided with each splice tray.

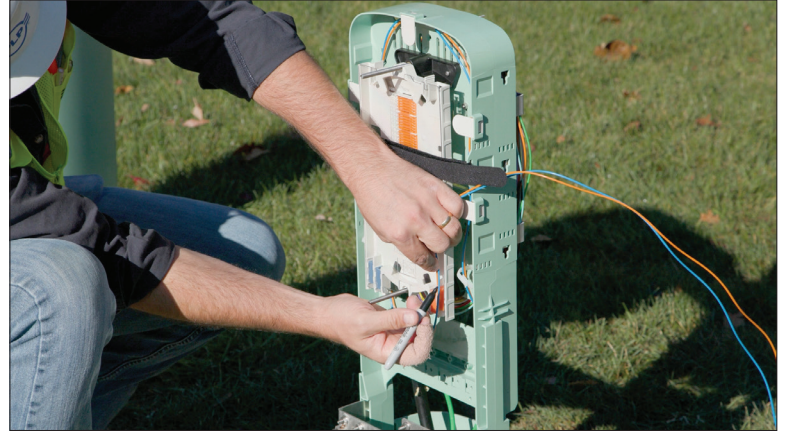

- 6 Route the fibers on the splice tray according to the installation instructions included with the splice tray kit. Splice the fibers according to your standard company practices.





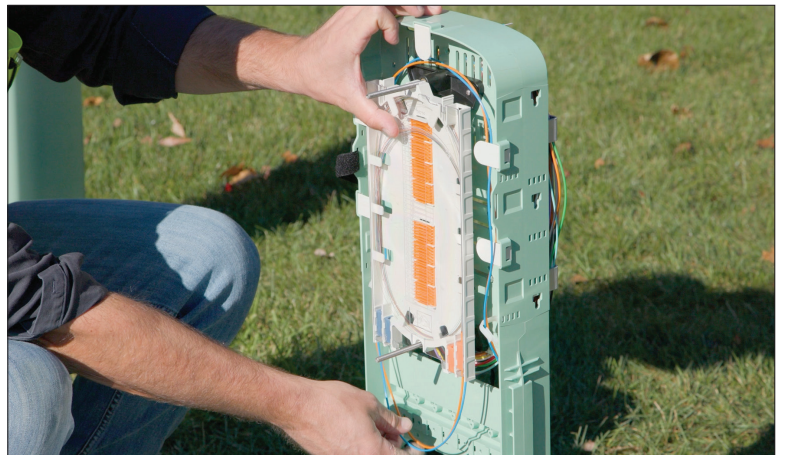


- 7 Secure the splice tray(s) to the organizer with the hold down strap.

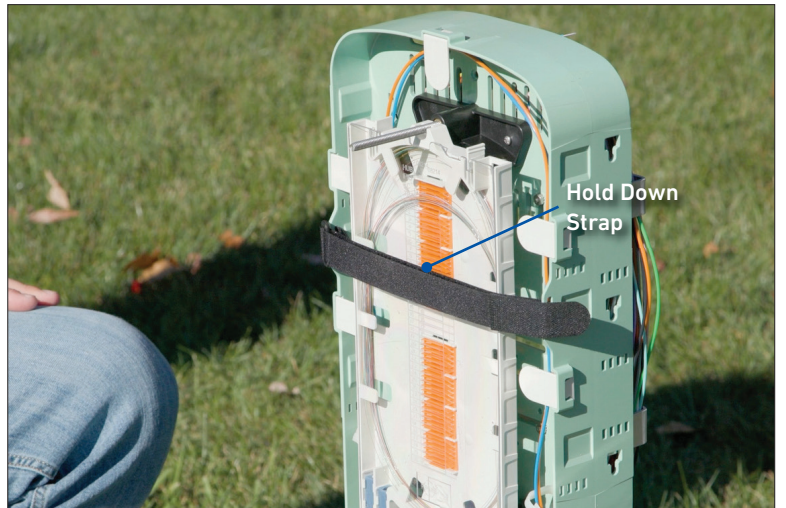

APPENDIX

COYOTE® Splice Tray Capacity Chart for COYOTE 10" Pedestal

PLP Catalog Number	Description	Image	Splice Type	Max Trays per Closure	Closure Max Splice Capacity
80809958	LITE-GRIP® Short Low Profile (24 CT)		Single Fusion (Single Stack)	6	144
80813152	LITE-GRIP® Short Low Profile (36 CT)		Single Fusion (Single Stack)	6	216
80808945	LITE-GRIP® Short Deep Profile (40 CT)		Single Fusion (Double Stack)	3	120
80814649	LITE-GRIP® Short Deep Profile (48 CT SF / 144 CT MF)		Single Fusion (Double Stack) OR Mass Fusion/ Ribbon	3	144 SF 432 MF
LGSTR144	LITE-GRIP® Short Deep Profile (144 CT)		Mass Fusion/ Ribbon	3	432
80814650	LITE-GRIP® Long Deep Profile (96 CT SF / 288 CT MF)		Single Fusion (Double Stack) OR Mass Fusion/ Ribbon	3	288 SF 864 MF



GLOBAL HEADQUARTERS
660 BETA DRIVE
CLEVELAND, OH 44143

+1 440 461 5200
INFO@PLP.COM
PLP.COM