




ATTENUATORS FOR SAF SPECTRUM COMPACT V-BAND AND E-BAND ANALYZERS

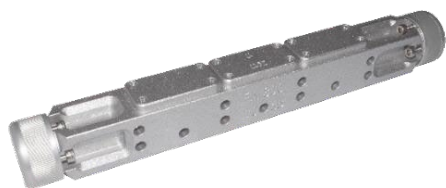





Attenuator for SAF Spectrum Compact V-band and E-band is a fully matched wideband variable attenuator module with high linearity performance and high dynamic range. No external biasing components needed. Attenuator is ideal for radio TX Power measurements.

Attenuator Specifications

P/N	J60WAGE301	J60WAGE701	J80WAGE301	J80WAGE701
Frequency Range	56 – 67 GHz	56 – 67 GHz	70-87 GHz	70-87 GHz
Nominal Attenuation	30 dB	70 dB	30 dB	70 dB
Connection Flange	UG385/U Compatible		UG387/U Compatible	
Attenuation Accuracy	±4.5 dB		±4.5 dB	
Return Loss	15 dB		15 dB	
Waveguide	R620 (WR15)		R740 (WR12)	
Material	Aluminium		Aluminium	



Attenuation of V-band and E-band attenuators

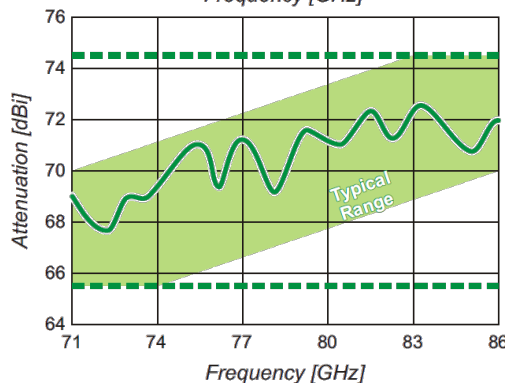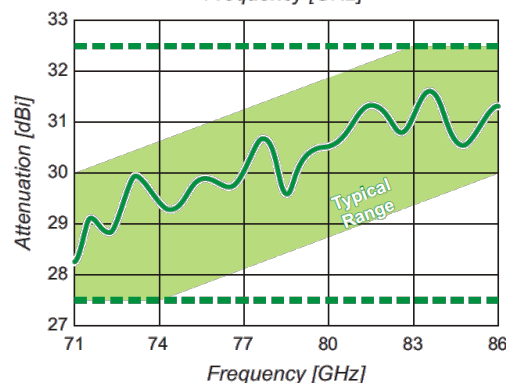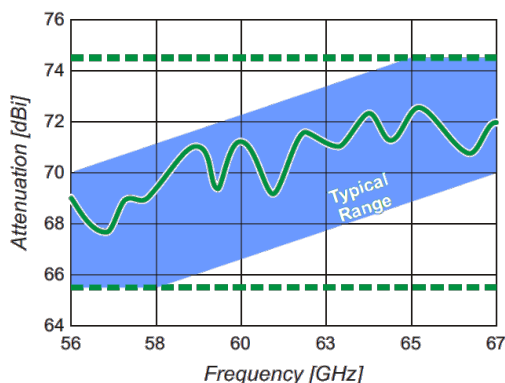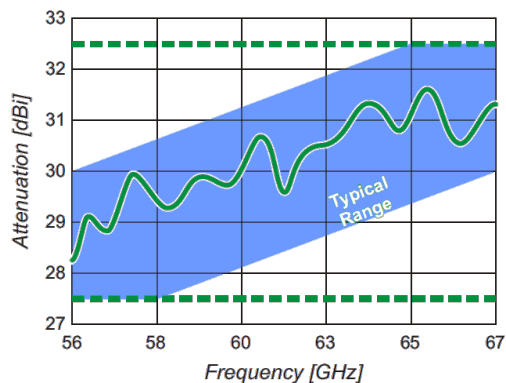

For more detailed information about SAF products visit www.saftehnika.com or contact your SAF representative info@saftehnika.com. Product features may vary between different models and configurations. They are subject to change without prior notice.