

TLK 150 MOBILE TWO-WAY RADIO

RAPID, RELIABLE DEPLOYMENT.
USE NATIONWIDE.



**EASY TO USE AND MANAGE
BUILT FOR THE JOB - SAFELY OPERATE IN VEHICLE
NATIONWIDE PUSH-TO-TALK**

Get your team up and running quickly. Combine the broad coverage of a nationwide cellular network with the ease of two-way radio communications.

Safely operate while driving with one button push-to-talk. Manage talk groups and subscriptions in real time. Increase coverage, connections, and productivity without expanding infrastructure.

You can even use the TLK 150 with your current compatible MOTOTRBO systems, LMR and smartphones. There's no costly or time-consuming FCC or spectrum licensing, or manual programming required.

FEATURE HIGHLIGHTS

- Private and group push-to-talk
- Over-the-air device management
- Wi-Fi connectivity
- GPS Location tracking
- Loud and clear audio
- Real-time presence
- Bluetooth enabled



GENERAL SPECIFICATIONS

| | |
|--------------------------------|--|
| Network | 4G LTE, 3G |
| Channel Capacity | 96 Channels |
| Contact List | 300 contacts |
| Dimensions (H x W x L) | 6.65 in x 1.73 in x 3.66 in (169mm x 44mm x 93mm) |
| Weight | 1.41 lbs. |
| Voice Codec | OPUS |
| Wi-Fi | 802.11 a/b/g/n - 2.4 / 5.0 GHz |
| Bluetooth | Bluetooth V4.2 BR/EDR + BLE |
| GPS | GNSS / A-GPS (GPS, GLONASS, Galileo, BeiDou) |
| IP Rating | IP54 IEC60529 |
| Apps Supported | Powered by WAVE |
| Antennas | LTE antennas - External GNSS antenna - External Wi-Fi/Bluetooth antenna - Internal |
| Connectors | Front RJ45 connector for wired mobile microphone Back antenna SMA connectors Back 20-pin MAP connector for other accessories |
| Rated Audio | 4 W (Internal) 16 W (External - 4 ohms) |
| Audio Distortion @ Rated Audio | 3% (Typical) |

ENVIRONMENTAL SPECIFICATIONS

| | |
|--------------------------|--------------------------------|
| Operating Temperature | -4°F /+ 140°F (-20°C / +60°C) |
| Storage Temperature | -40°F /+ 185°F (-40°C / +85°C) |
| Thermal Shock | Per MIL-STD 810 |
| Humidity | Per MIL-STD 810 |
| ESD | IEC61000 - 4-2 Level 4 |
| Dust and Water Intrusion | IEC60529 - IP54 Cat 2 |
| Packaging Test | Per MIL-STD 810 |

APPLICABLE U.S. MILITARY SPEC RATINGS

| MIL 810G STANDARD* | METHOD | PROCEDURES |
|--------------------|--------|------------|
| Low Pressure | 500.5 | I, II |
| High Temperature | 501.5 | I, II |
| Low Temperature | 502.5 | I, II |
| Temperature Shock | 503.5 | I, II |
| Solar Radiation | 505.5 | I-C |
| Rain Blowing | 506.5 | I |
| Dust Blowing | 510.5 | I |
| Immersion | 512.5 | I |
| Vibration | 514.6 | I |
| Shock | 516.6 | I,IV |

*Also meets equivalent MIL-STD-810-C, -D, -E and -F





TLK 150 MOBILE TWO-WAY RADIO ACCESSORIES



PUSH-TO-TALK SOLUTIONS

Make communicating easier and safer with these optional accessories from a simple PTT microphone to a complete hands free solution.

| | |
|----------|--------------------------------------|
| PMMN4129 | Wideband Compact Mobile Microphone |
| GMMN4065 | Visor Microphone |
| RLN4856 | Remote Mount Footswitch Push-to-Talk |
| RLN4857 | Remote Mount Pushbutton Push-to-Talk |
| RLN4836 | Emergency Footswitch |



WIRELESS AUDIO ACCESSORIES

| | |
|----------|--|
| PMMN4127 | WM500 Wireless PoC/Radio Remote Speaker Microphone |
| PMLN8123 | EP910W Bluetooth™ Earpiece with Push-To-Talk |
| PMLN8298 | WP300 Wireless Bluetooth Control Pod* |

ANTENNAS

| | |
|-------------|-------------------------|
| AN000359A01 | GNSS Dash Mount Antenna |
| AN000358A01 | LTE Antenna |



MOUNTING ACCESSORIES

Choose where to mount the radio without compromising safety. Extend the value of your previous purchases by using XPR 2500 mounting kits

| | |
|---------|----------------------------|
| RLN6466 | Low Profile Trunnion Kit |
| RLN6467 | High Profile Trunnion Kit |
| RLN6468 | Key Lock Trunnion Mount |
| FTN6083 | In-Dash Mounting Kit - DIN |



EXTERNAL SPEAKER

Boost audio at your workstation or in your vehicle.

| | |
|-------------|---------------------------------|
| AC000240A01 | Wideband External Speaker, 16 W |
|-------------|---------------------------------|


CABLES AND ACCESSORIES

| | |
|----------|---------------------------------------|
| HKN4137 | Mobile Power Cable 10 FT, 14 AWG, 15A |
| PMLN8153 | PS Adaptor and Cable |
| HKN9327 | Ignition Sense Cable |
| HLN9457A | 16 Pin MAP Connector Kit |

*Only supported with a compatible earpiece attached, (PMLN8077, PMLN8125, & PMLN8190). Will not function as standalone PTT device

YOUR PATH TO NATIONWIDE* PTT

PLACE YOUR ORDER, GET YOUR RADIO
AND START TALKING

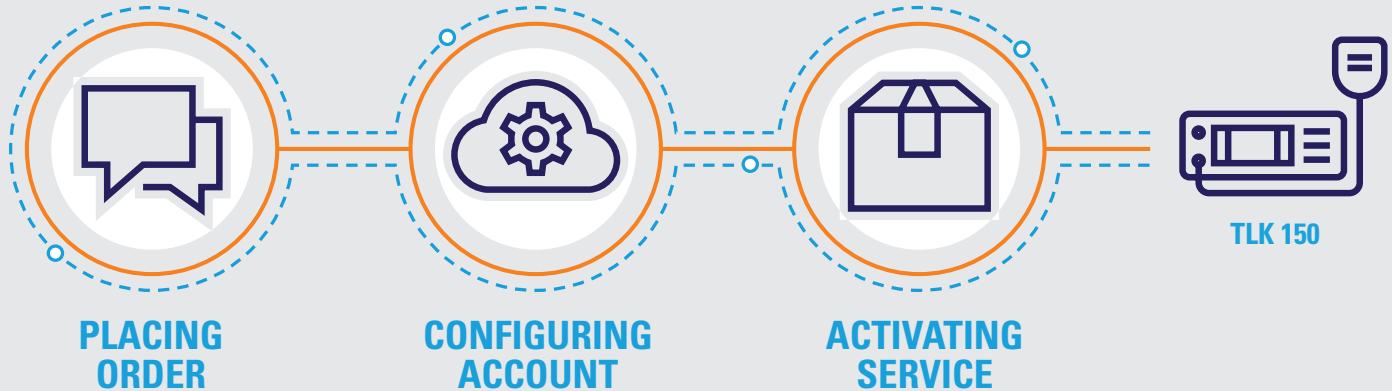

Opening an account and placing an order are simple and quick:

- Create account
- Select subscription plan
- Provide billing information

Configure your account and team settings from any computer or smartphone:

- Add / modify users
- Create / assign talkgroups

Activating your TLK 150:

- Install your TLK 150 into a vehicle
- Power on device and PTT

*Coverage will vary. See user guide for details.

WARRANTY AND REPAIRS

ESSENTIAL SERVICES

Support when you need it

When the unpredictable happens to your two-way radio, Essential Services provide you access to Motorola's Technical Support teams and resources for troubleshooting and maintenance. Three year extended warranty included from the date of end user purchase.



Call: (844) 917-4215
Email: info@callmc.com
Web: www.callmc.com



Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. motorolasolutions.com

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2020 Motorola Solutions, Inc. All rights reserved. 05-2022 [BG06]