



# BlueWave® MX-250 Glass Window Replacement Instructions

1. Before starting, disconnect power to the unit.
2. Lay the emitter on its side with the cover facing upwards. Using a 5/64" hex key, loosen and fully remove the two screws (Figure 1).
3. Remove the side cover by lifting from the bottom as shown in Figure 2.

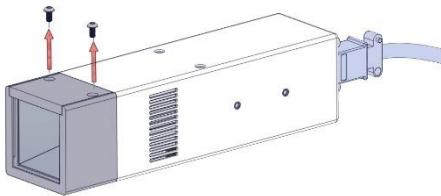


Figure 1

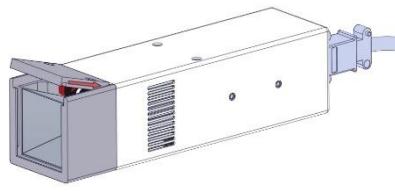


Figure 2

4. Slide the damaged glass cover out (Figure 3), taking care not to touch the metallic reflector surfaces.

*NOTE: If the old window has shattered, be sure to remove all debris before attempting to install the new glass window.*

5. Unwrap the new window and carefully clean it with the enclosed alcohol swab. Holding the window by its sides, slide it into the groove on the emitter (Figure 4). Take care not to touch the glass with bare hands, as any residue left on the window can adversely affect the performance of the unit.

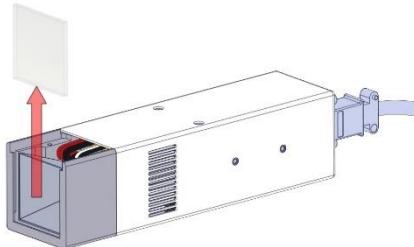


Figure 3

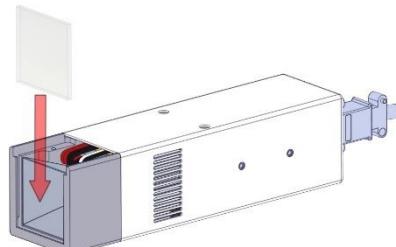


Figure 4

6. Reversing steps 2 & 3, reinstall the side cover, insert the two screws and tighten.

[www.dymax.com](http://www.dymax.com)

**Americas**  
USA | +1.860.482.1010 | [info@dymax.com](mailto:info@dymax.com)

**Europe**  
Germany | +49 611.962.7900 | [info\\_de@dymax.com](mailto:info_de@dymax.com)  
Ireland | +353 21.237.3016 | [info\\_ie@dymax.com](mailto:info_ie@dymax.com)

**Asia**  
Singapore | +65.67522887 | [info\\_ap@dymax.com](mailto:info_ap@dymax.com)  
China | +86.755.83485759 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
Hong Kong | +852.2460.7038 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
Korea | +82.31.608.3434 | [info\\_kr@dymax.com](mailto:info_kr@dymax.com)

© 2021 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. Dymax does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than Dymax or act as a grant of license under any Dymax Corporation Patent. Dymax recommends that each user adequately test its proposed use and application before actual repetitive use, using the data contained in this bulletin as a general guide. QS083 08/12/2021