


SKID STEER AND EXCAVATOR

SICKLE BAR MOWER

The skid steer and excavator mounted Sickle Mower allows operators to increase productivity of berm cutting and trail maintenance jobs with its large cut width. A great attachment for farms, orchards, or road maintenance businesses.

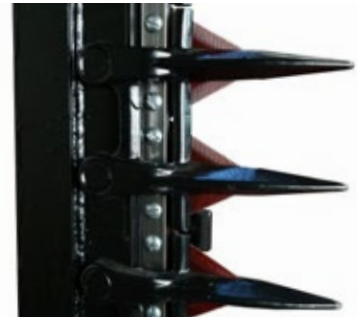

MODEL	5 ft Excavator	7 ft Excavator	9 ft Excavator	7 ft Skid Steer	9 ft Skid Steer
Aquatic Approved	Yes	No	No	No	No
Cutter Length	5 ft	7 ft	9 ft	7 ft	9 ft
Cutting Capacity	2" Material	2" Material	2" Material	2" Material	2" Material
Drive System	Gerotor Motor w/ Pitman drive	Gerotor Motor w/Planetary Gear drive	Gerotor Motor w/ Planetary Gear drive	Gerotor Motor w/Planetary Gear drive	Gerotor Motor w/Planetary Gear drive
Flow Ranges	9-12 GPM, 12-15 GPM, 15-20 GPM	12-15 GPM, 15- 20 GPM	12-15 GPM, 15- 20 GPM	15-20 GPM	15-20 GPM
Max Pressure	3,500 PSI	3,500 PSI	3,500 PSI	3,500 PSI	3,500 PSI
Number of Teeth	22	28	36	28	36
Tooth Style	Top Serrated 2" Segment	Top Serrated 2" Segment	Top Serrated 2" Segment	Top Serrated 2" Segment	Top Serrated 2" Segment
Weight	225 lbs. (Without Mount)	350 lbs. (Without Mount)	400 lbs. (Without Mount)	780 lbs.	950 lbs.