WE'RE HERE FOR YOU.

1161 N. Main Street
Denton, NC 27239

336-859-2002

CIDATTACHMENTS.COM

A LEGACY OF TRUSTED ATTACHMENTS.

Updated March 9, 2026

©2025 CID Attachments. All rights reserved.

CID ATTACHMENTS



CID ATTACHMENTS

COMPLETE PRODUCT GUIDE

UPDATED MARCH 9, 2026


TRUSTED ATTACHMENTS
EST.
2003
CID
INDUSTRIAL QUALITY

WHAT'S INSIDE

SKID STEER 4

Augers 5
Backhoes 9
Boom Poles 10
Brooms 11
Brush Cutters & Mulchers 12
Buckets 18
Concrete 29
Conversions 30
Dozer Blades 31
Dirt Workers 32
Grapples 34
Hay Equipment 45
Receiver Hitches 49
Log Splitter 49
Manure Forks 49
Pallet Forks & Frames 50
Post Drivers 53
Rakes 54
Snow Equipment 56
Sod Roller 58
Stump Grinder 59
Tillers 59
Tree Removers & Saws 60
Trencher 62

MINI SKID STEER 64

Augers 65
Boom Poles 68
Brooms 68
Brush Cutters 69
Buckets 69
Concrete Breaker 73
Conversions 73
Grading 74
Grapples 74
Receiver Hitch 76
Pallet Forks 77
Rakes 77
Snow Equipment 80
Ripper 81
Tiller 81
Trencher 81

RESOURCES 103

Bucket Capacities 103
Warranty Info 107
Pin-On Diagram 110
Wiring 112
Attachment Capacities 115
Notes 119

TRACTOR 82

Augers 83
Buckets 84
Boom Poles 86
Brooms 86
Conversions 86
Grapples 87
Manure Fork 90
Pallet Forks 90
Hay Spears 91
Receiver Hitch 93
Snow Equipment 93
Trencher 62

MINI EXCAVATOR 94

Augers 95
Brush Cutters 97
Buckets 101
Concrete Breakers 102
Conversions 102
Root Rake 102

SKID STEER

ATTACHMENTS



SKID STEER LONG BOTTOM BUCKET



AUGER DRIVE

HEAVY DUTY

MODEL	HAD	RAD
WEIGHT	300 Lbs.	
FLOW RANGE	15-25 GPM	
DRIVE SHAFT OPTIONS	2" Hex	2-9/16" Round
TORQUE AT 3500 PSI	3020 ft. lbs.	
DRIVE SYSTEM	Direct Drive through Planetary Gear	
BIT SIZES AVAILABLE	4", 6", 9", 12", 15", 18", 20", 24", 30", 36"	
BIT TYPES AVAILABLE	Earth, Rock, Tree	



MUSCLE & VERSATILITY

Skid steer attachments give you the muscle and versatility to handle tough jobs fast. With the right setup, one machine can dig, grade, grapple, and more—all without slowing down.

AUGER DRIVE

X-TREME DUTY

MODEL	XHAD
WEIGHT	340 Lbs.
FLOW RANGE	15-25 GPM
DRIVE SHAFT OPTIONS	2" Hex
TORQUE AT 3500 PSI	3150 ft. lbs.
DRIVE SYSTEM	Direct Drive through Planetary Gear
BIT SIZES AVAILABLE	4", 6", 9", 12", 15", 18", 20", 24", 30", 36",48"
BIT TYPES AVAILABLE	Earth, Rock, Tree











EARTH AUGER BITS

MODEL	Earth Auger Bits										
WIDTH	4"	6"	9"	12"	15"	18"	20"	24"	30"	36"	48"
WEIGHT	47 Lbs.	51 Lbs.	95 Lbs.	118 Lbs.	133 Lbs.	166 Lbs.	185 Lbs.	201 Lbs.	280 Lbs.	448 Lbs.	500 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round										



TREE AUGER BITS

MODEL	Tree Auger Bits			
WIDTH	18"	24"	30"	36"
WEIGHT	144 Lbs.	200 Lbs.	268 Lbs.	352 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round			



ROCK AUGER BITS

MODEL	Rock Auger Bits					
WIDTH	4"	6"	9"	12"	18"	24"
WEIGHT	50 Lbs.	85 Lbs.	112 Lbs.	138 Lbs.	201 Lbs.	291 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round					

AUGER ADAPTERS

MODEL	CID9135	CID9167	CID9141	CID8084
ADAPTER TYPE	2 9/16" Round Drive to 2" Hex Adapter	Hex Drive to 2 9/16" Round Adapter	2 9/16" Round Drive to 2" Round Adapter	2" Round to 2 9/16" Round Adapter
WEIGHT	15 Lbs.			



AUGER EXTENSIONS

MODEL	Auger Extensions			
WIDTH	24"	36"	48"	60"
WEIGHT	45 Lbs.	62 Lbs.	79 Lbs.	96 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round			





10" STUMP PLANER

MODEL	10" Stump Planer
WEIGHT	60 Lbs.
WIDTH	10"
CUTTING DEPTH	18"
CUTTING TEETH	3 Blade Tool Steel Sharpenable Blades
DRIVE SHAFT	2" Hex
MIN. TORQUE REQUIREMENT	2200 ft-lbs
PLANNER PILOT	Replaceable Spiral Pilot and Pilot Blades





BACKHOE STIFF ARM

MODEL	XBHSTA
WEIGHT	394 Lbs.
LENGTH	88"
DIGGING DEPTH	84"
CYLINDER SIZE	3" x 16"
# OF CYLINDERS	1
AVAILABLE BUCKET SIZES	8", 12", 16", 20", 24"



BACKHOE SWING ARM

MODEL	XBHSWA
WEIGHT	582 Lbs.
LENGTH	95"
DIGGING DEPTH	84"
DEGREE OF SWING	110 Degrees
BOOM CYLINDER SIZE	3" x 16"
SWING CYLINDER SIZE	3" x 6"
# OF CYLINDERS	2
AVAILABLE BUCKET SIZES	8", 12", 16", 20", 24"



*BACKHOE BUCKETS AND MECHANICAL THUMBS SOLD SEPARATELY

BOOMS & BROOMS

BOOM POLE
STANDARD DUTY

MODEL	BP
WEIGHT	150 Lbs.
OVERALL WIDTH	46"
HEIGHT	64"
DEPTH	18"
FRAME	3" x 3" x 1/4" Tubing
CARRY CAPACITY	3000 Lbs.

BOOM POLE
X-TREME DUTY

MODEL	XBP
WEIGHT	170 Lbs.
OVERALL WIDTH	46"
HEIGHT	64"
DEPTH	18"
FRAME	4" x 4" x 1/4" Tubing
CARRY CAPACITY	4000 Lbs.



BOOM POLE
TELESCOPIC

MODEL	TBP
WEIGHT	503 Lbs.
ADJUSTABLE HEIGHT	150"-222"
HYDRAULIC EXTENSION HEIGHTS	48"
MANUAL EXTENSION HEIGHTS	12" or 24"
POLE TUBING	4" x 4" x 3/8"
HYDRAULIC EXTENSION TUBING	3" x 3" x 3/8"
MANUAL EXTENSION TUBING	2" x 2" x 3/16"
RETRACTED CARRY CAPACITY	1200 Lbs. at 45 Degrees
FULLY EXTENDED CARRY CAPACITY	500 Lbs. at 45 Degrees
HYDRAULIC CYLINDER	2-1/2" x 48"



PICK-UP BROOM
X-TREME DUTY

MODEL	PUBROOM72	PUBROOM84
WEIGHT	1,114 Lbs	1,276 Lbs
WIDTH	72"	84"
HEIGHT	25"	
FLOW RANGE	15-25 GPM	
BRISTLE TYPE	All Poly, All Wire, 50/50 Mix	
CORE	8" Core 26" Bristle	
WAFERS	1 Piece Tubing Bristle	







ANGLE BROOM X-TREME DUTY HYDRAULIC

MODEL	XHAB48	XHAB60	XHAB72	XHAB84	XHAB96
WEIGHT	785 Lbs.	833 Lbs.	912 Lbs.	1,029 Lbs.	1,101 Lbs.
WIDTH	48"	60"	72"	84"	96"
FLOW RANGE	15-25 GPM				
BRISTLE QUANTITY	32	38	44	50	56
BRISTLE TYPE	All Poly, All Wire, 50/50 Mix				
BROOM ANGLES	30 Degrees, Left or Right				
CORE	8" Core 26" Bristle OR 10" Core 32" Bristle				
WAFERS	Individual Replaceable Wafers				
WIRING HARNESS OPTIONS	Universal, 7pin, 8pin or 14pin				

ANGLE BROOM X-TREME DUTY MANUAL

MODEL	XMAB48	XMAB60	XMAB72	XMAB84	XMAB96
WEIGHT	770 Lbs.	818 Lbs.	897 Lbs.	1,012 Lbs.	1,055 Lbs.
WIDTH	48"	60"	72"	84"	96"
FLOW RANGE	15-25 GPM				
BRISTLE QUANTITY	32	38	44	50	56
BRISTLE TYPE	All Poly, All Wire, 50/50 Mix				
BROOM ANGLES	30 Degrees, Left or Right				
CORE	8" Core 26" Bristle OR 10" Core 32" Bristle				
WAFERS	Individual Replaceable Wafers				

CID BRUSH CUTTERS



SWING BOOM BRUSH CUTTER

MODEL	SBC	SBCNS
CUTTING WIDTH	48"	
WEIGHT	1,206 Lbs.	1,208 Lbs.
FLOW RANGE	14-20 GPM or 16-26 GPM	17 - 30 GPM
MOTOR	High Torque Parker Motor	Direct Drive Piston Motor
CASE DRAIN	Not Required	Required
BLADE COUNT	2 (5/8" AR400)	
CUTTING CAPACITY	3"	4"
MAX PRESSURE	3000 PSI	4000 PSI
HORIZONTAL REACH	96"	
VERTICAL REACH	192"	
BOOM CYLINDER SIZE	3" x 16"	
SWING CYLINDER SIZE	3" x 6"	



BRUSH CUTTERS





STANDARD DUTY BRUSH CUTTER

MODEL	SDBC60	SDBC72	SDBC78	SDOFBC60	SDOFBC72	SDOFBC78
CUTTING WIDTH	60"	72"	78"	60"	72"	78"
WEIGHT	833 Lbs.	966 Lbs.	1,070 Lbs.	878 Lbs.	1004 Lbs.	1,104 Lbs.
DECK TYPE	Closed Front			Open Front		
FLOW RANGE	14-20 GPM Or 16-26 GPM					
MOTOR	High Torque Parker Motor					
CASE DRAIN	Not Required					
BLADE COUNT	2					
CUTTING CAPACITY	3"					

HEAVY DUTY BRUSH CUTTER

MODEL	HDBCNS60	HDBCNS72	HDBCNS78
CUTTING WIDTH	60"	72"	78"
WEIGHT	1,110 Lbs.	1,281 Lbs.	1,412 Lbs.
FLOW RANGE	14-20 GPM or 16-26 GPM		
MOTOR	High Torque Parker Motor		
CASE DRAIN	Not Required		
BLADE COUNT	2 or 3 (5/8" AR400)		
CUTTING CAPACITY	4"		
PUSH BAR HEIGHT	14" Above Deck		



BRUSH CUTTERS

X-TREME DUTY
STANDARD FLOW BRUSH CUTTER



MODEL	XBCLF	XBC1626	XBCMF
CUTTING WIDTH	60", 72", 78", 84"	60", 72", 78", 84"	60", 72", 78", 84"
FLOW RANGE	14-20 GPM	16-26 GPM	20-30 GPM
MOTOR	Parker Gerotor		
CASE DRAIN	Not Required		
BLADE COUNT	3 (5/8" AR400)		
CUTTING CAPACITY	6"		
MULCHING TEETH	Optional		
# OF MULCHING TEETH	60": 9 72"-84": 12		
BLADE DIRECTION	Bi-directional		

X-TREME DUTY
HIGH FLOW BRUSH CUTTER



MODEL	XBC1730	XBC2735	XBC3048
CUTTING WIDTH	60", 72", 78", 84"	60", 72", 78", 84"	60", 72", 78", 84"
FLOW RANGE	17-30 GPM	27-35 GPM	30-48 GPM
MOTOR	Fluid Gear Radial Piston Motors		
CASE DRAIN	Required		
BLADE COUNT	3 (5/8" AR400)		
CUTTING CAPACITY	7"		
MULCHING TEETH	Optional		
# OF MULCHING TEETH	60": 9 72"-84": 12		
BLADE DIRECTION	Bi-directional		



TREE REAPER
STANDARD FLOW

MODEL	TR1626-60	TR1626-72	TR1626-78	TR1626-84	TR1727-60	TR1727-72	TR1727-78	TR1727-84
CUTTING WIDTH	60"	72"	78"	84"	60"	72"	78"	84"
WEIGHT	1,121 Lbs.	1,321 Lbs.	1,391 Lbs.	1,689 Lbs.	1,151 Lbs.	1,347 Lbs.	1,418 Lbs.	1,739 Lbs.
FLOW RANGE	16-26 GPM				17-30 GPM			
MOTOR	Parker Gerotor				Parker Bent Axis Piston Motor			
CASE DRAIN	Not Required				Required			
BLADE COUNT	3 (5/8" AR400)				3 (5/8" AR400)			
CUTTING CAPACITY	5"				7"			
MULCHING TEETH	Optional							
# OF MULCHING TEETH	9	12			9	12		
BOLT-ON SKID SHOES	Replaceable							
BOLT-ON BLADES	Replaceable							
BLADE DIRECTION	Bi-directional							

TREE REAPER
HIGH FLOW



MODEL	TR3048-72MT	TR3048-78MT	TR3048-84MT
CUTTING WIDTH	72"	78"	84"
WEIGHT	1,640 Lbs.	1,748 Lbs.	1,947 Lbs.
FLOW RANGE	30-48 GPM		
MOTOR	Parker Bent Axis Motor		
CASE DRAIN	Required		
BLADE COUNT	3 (5/8" AR400 Double Edged)		
CUTTING CAPACITY	10"		
MULCHING TEETH	Included		
# OF MULCHING TEETH	12 (Replaceable)		
BOLT-ON SKID SHOES	Replaceable		
BOLT-ON BLADES	Replaceable		
BLADE DIRECTION	Bi-directional		





SEVERE DUTY

BENT AXIS PISTON MOTOR


MODEL	SVBAPC72L	SVBAPC78L	SVBAPC72H	SVBAPC78H
CUTTING WIDTH	72"	78"	72"	78"
WEIGHT	1,979 Lbs.	2,190 Lbs.	1,989 Lbs.	2,233 Lbs.
FLOW RANGE	20-30 GPM		30-50 GPM	
MOTOR	Parker Bent Axis Motor			
CASE DRAIN	Required			
BLADE COUNT	4 (3/4" AR400)			
CUTTING CAPACITY	10"			
MULCHING TEETH	Included & Replaceable			
# OF MULCHING TEETH	16	20	16	20



DISC MULCHER FOR SKID STEERS

MODEL	FDM44	FDM60
WEIGHT	1,749 Lbs.	2,507 Lbs.
WIDTH	52"	82"
HEIGHT	37"	
DEPTH	56"	78"
CUTTING WIDTH	44" Fully Machined Disc	60" Fully Machined Disc
DISC MATERIAL	Strenx 700E	
FLOW RANGE	20-30 GPM or 32-44 GPM	32-44 GPM
CASE DRAIN	Required	
CUT CAPACITY	8"	14"
DECK THICKNESS	3/8" Steel	
MOTOR	100cc & 150cc Radial Piston	150 cc Radial Piston
MULCHING TEETH	34 Teeth	49 Teeth



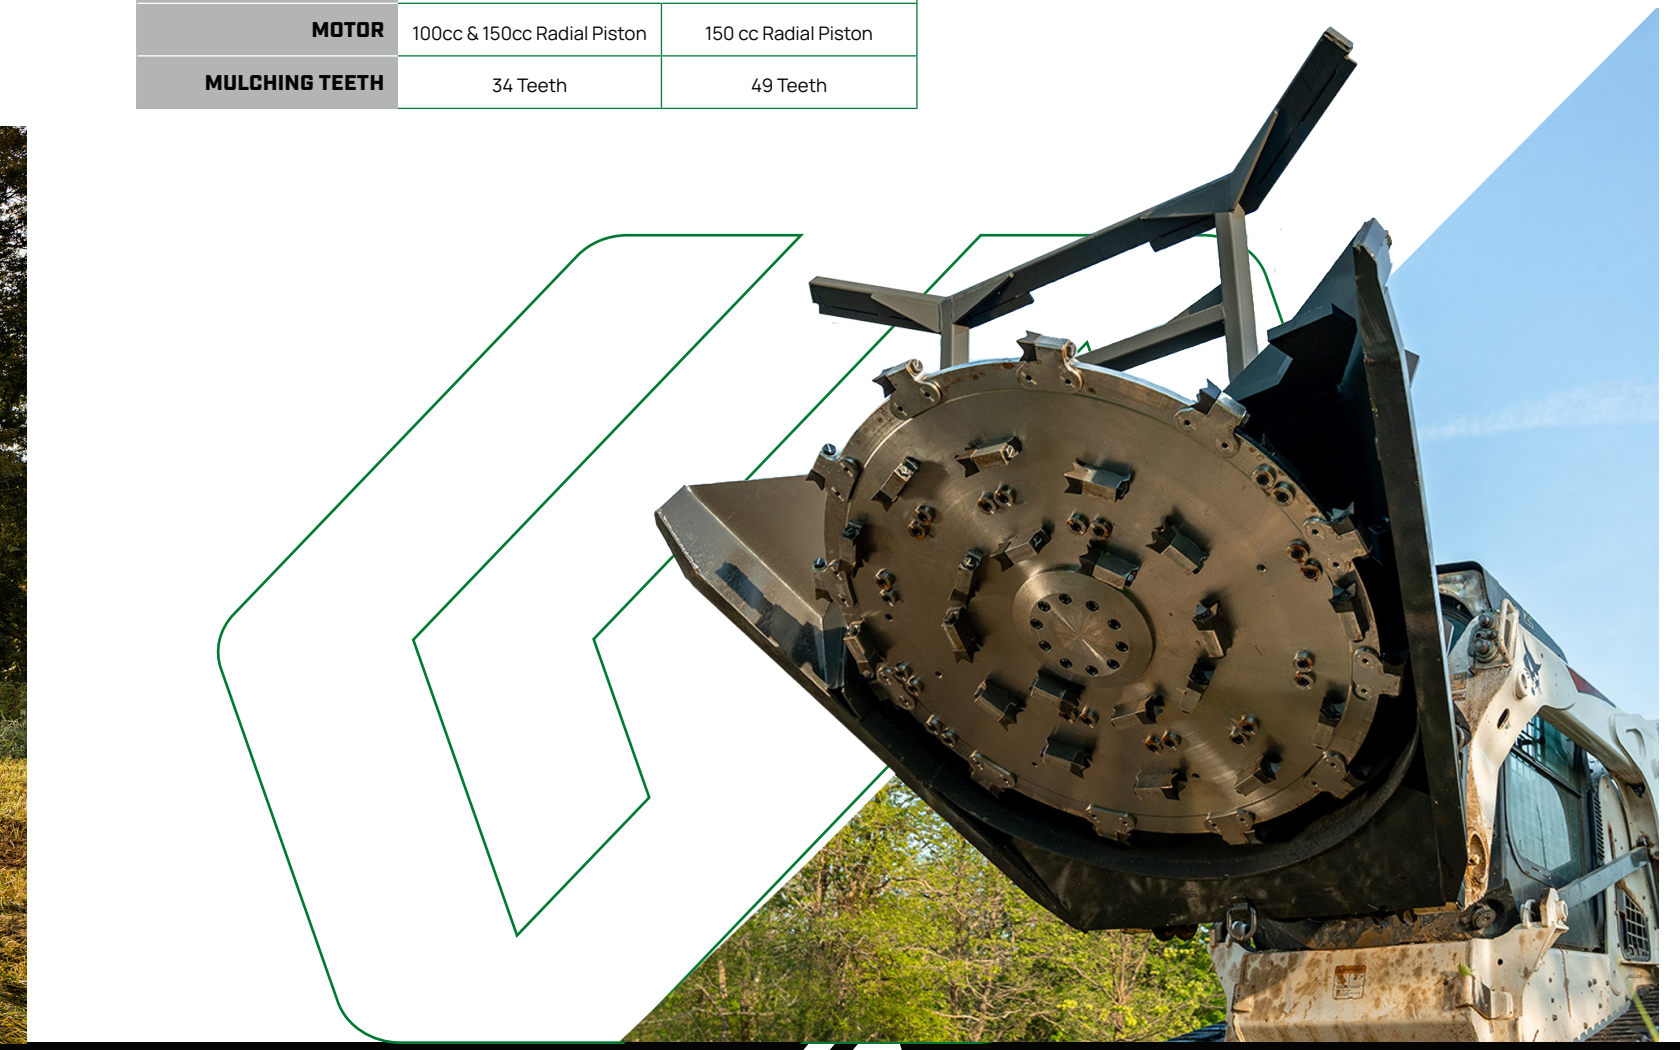



4-N-1 BUCKET
STANDARD DUTY

MODEL	SD4N1-54	SD4N1-60	SD4N1-63	SD4N1-66	SD4N1-72
WEIGHT	540 Lbs.	600 Lbs.	630 Lbs.	640 Lbs.	650 Lbs.
WIDTH	54"	60"	63"	66"	72"
HEIGHT	28"				
RATED FOR	40-50 HP				
CUTTING EDGE	1/2" x 6"				
CYLINDER SIZE	2 1/2" x 8"				
WELDED TEETH	Optional				
BOLT ON EDGE	Optional (Not configurable with welded teeth)				



4-N-1 BUCKET
HEAVY DUTY

MODEL	HD4N1-60	HD4N1-63	HD4N1-66	HD4N1-72	HD4N1-78	HD4N1-84
WEIGHT	748 Lbs.	785 Lbs.	810 Lbs.	840 Lbs.	910 Lbs.	980 Lbs.
WIDTH	60"	63"	66"	72"	78"	84"
HEIGHT	28"					
RATED FOR	50-65 HP					
CUTTING EDGE	3/4" x 6"					
CYLINDER SIZE	2 1/2" x 8"					
WELDED TEETH	Optional					
SIDE CUTTERS	Optional					
BOLT ON EDGE	Optional (Not configurable with welded teeth)					







4-N-1 BUCKET
X-TREME DUTY

MODEL	X4N1-72	X4N1-78	X4N1-81	X4N1-84
WEIGHT	1,150 Lbs.	1,253 Lbs.	1,321 Lbs.	1,378 Lbs.
WIDTH	72"	78"	81"	84"
HEIGHT	28"			
RATED FOR	65+ HP			
CUTTING EDGE	1" x 8"			
CYLINDER SIZE	3" x 6"			
WELDED TEETH	Optional			
BOLT ON EDGE	Optional (Not configurable with welded teeth)			



4-N-1 BUCKET
SEVERE DUTY

MODEL	SV4N1-72	SV4N1-78	SV4N1-81	SV4N1-84
WEIGHT	1,203 Lbs.	1,303 Lbs.	1,353 Lbs.	1,403 Lbs.
WIDTH	72"	78"	81"	84"
HEIGHT	32"			
RATED FOR	70+ HP			
CUTTING EDGE	1" x 8"			
CYLINDER SIZE	2 3/4" x 8"			
WELDED TEETH	Optional			
BOLT ON EDGE	Optional (Not configurable with welded teeth)			

CONCRETE BUCKET FOR SKID STEERS

MODEL	1/2YCB	3/4YCB	1YCB
WEIGHT	396 Lbs.	425 Lbs.	460 Lbs.
BUCKET CAPACITY	1/2 Yard	3/4 Yard	1 Yard
MATERIAL THICKNESS	3/16"		1/4"
WIDTH	60"		
HEIGHT	20"		
DEPTH	38"	42 1/2"	64"
AVAILABLE UPGRADES	Optional Hydraulic Chute		



HIGH DUMP BUCKET STANDARD DUTY

MODEL	HDB60	HDB72	HDB78	HDB84	HDB96
WEIGHT	971 Lbs.	1,057 Lbs.	1,069 Lbs.	1,144 Lbs.	1,231 Lbs.
WIDTH	60"	72"	78"	84"	96"
HP RATING	Up to 65 HP				
DUMPING HEIGHT	3 Extra Feet				
CUTTING EDGE	3/4" x 6"				
BUCKET WRAP	3/16"				



HIGH DUMP BUCKET X-TREME DUTY

MODEL	HDB60	HDB72	HDB78	HDB84	HDB96
WIDTH	60"	72"	78"	84"	96"
HP RATING	65+ HP				
DUMPING HEIGHT	3 Extra Feet				
CUTTING EDGE	1" x 8"				
BUCKET WRAP	1/4"				







LONG BOTTOM BUCKET STANDARD DUTY

MODEL	LBB48	LBB54	LBB60	LBB63	LBB66	LBB72	LBB74	LBB78	LBB81	LBB84	LBB90	LBB96
WEIGHT	231 Lbs.	260 Lbs.	352 Lbs.	414 Lbs.	386 Lbs.	410 Lbs.	420 Lbs.	442 Lbs.	456 Lbs.	468 Lbs.	495 Lbs.	528 Lbs.
WIDTH	48"	54"	60"	63"	66"	72"	74"	78"	81"	84"	90"	96"
HEIGHT	21"											
RATED FOR	Up to 65 HP											
CUTTING EDGE	3/4" x 6"											
BUCKET WRAP	3/16"											
WEAR BARS & SIDE EDGE	3/8"											
WELDED TEETH	Optional											
SIDE CUTTING TEETH	Optional											
BOLT ON EDGE	Optional											


LONG BOTTOM BUCKET X-TREME DUTY

MODEL	LBB60	LBB63	LBB66	LBB72	LBB74	LBB78	LBB81	LBB84	LBB90	LBB96
WIDTH	60"	63"	66"	72"	74"	78"	81"	84"	90"	96"
HEIGHT	21"									
RATED FOR	65+ HP									
CUTTING EDGE	1" x 8"									
BUCKET WRAP	1/4"									
WEAR BARS & SIDE EDGE	1/2"									
WELDED TEETH	Optional									
SIDE CUTTING TETH	Optional									
BOLT ON EDGE	Optional									

A



B

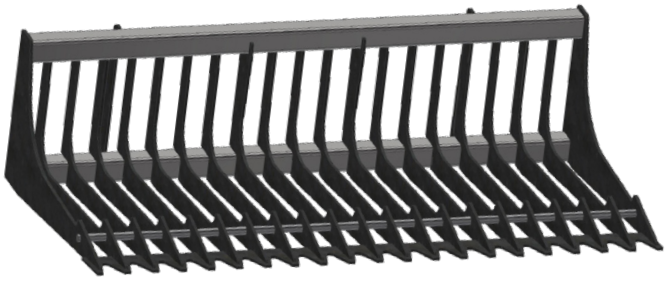

LOW PROFILE BUCKET | A

FOR SKID STEERS

MODEL	LPB54	LPB60	LPB63	LBB66	LPB72	LPB74	LPB78	LPB81	LPB84	LPB90	LBB96
WEIGHT	260 Lbs.	352 Lbs.	367 Lbs.	386 Lbs.	410 Lbs.	420 Lbs.	442 Lbs.	456 Lbs.	468 Lbs.	495 Lbs.	528 Lbs.
WIDTH	54"	60"	63"	66"	72"	74"	78"	81"	84"	90"	96"
HEIGHT	21"										
RATED FOR	Up to 65 HP										
CUTTING EDGE	3/4" X 6"										
BUCKET WRAP	3/16"										
WEAR BARS & SIDE EDGE	3/8"										
BOLT ON EDGE	Optional										
WELD ON TEETH	Optional										

ROCK BUCKET | B

STANDARD DUTY

MODEL	SDVTRB63	SDVTRB66	SDVTRB72	SDVTRB78	SDVTRB81	SDVTRB84
WEIGHT	377 Lbs.	385 Lbs.	403 Lbs.	450 Lbs.	467 Lbs.	485 Lbs.
WIDTH	63"	66"	72"	78"	81"	84"
HEIGHT	20"					
RATED FOR	35 - 45 HP					
TINE THICKNESS	5/16"					
TINE SPACING	3"					
ROCK DAM REINFORCEMENT	1" Rod					
BUCKET EDGE	Finger / Versatech					

C



D



ROCK BUCKET | C

HEAVY DUTY

MODEL	HDRB60	HDRB63	HDRB66	HDRB72	HDRB78	HDRB81	HDRB84	HDRB96
WEIGHT	414 Lbs.	435 Lbs.	479 Lbs.	524 Lbs.	556 Lbs.	588 Lbs.	642 Lbs.	734 Lbs.
WIDTH	60"	63"	66"	72"	78"	81"	84"	96"
HEIGHT	19"							
RATED FOR	45-65 HP							
TINE THICKNESS	3/8"							
TINE SPACING	2"							
CUTTING EDGE	3/4" x 6"							
WELD ON TEETH	Optional (Comes with 1" x 8" Upgraded Cutting Edge)							
ROCK DAM REINFORCEMENT	1" Rod							

ROCK BUCKET | D

X-TREME DUTY

MODEL	XDRB60	XDRB66	XDRB72	XDRB78	XDRB81	XDRB84	XDRB90	XDRB96	XDRB102
WEIGHT	635 Lbs.	699 Lbs.	719 Lbs.	760 Lbs.	780 Lbs.	818 Lbs.	844 Lbs.	900 Lbs.	957 Lbs.
WIDTH	60"	66"	72"	78"	81"	84"	90"	96"	102"
HEIGHT	21"								
RATED FOR	65-110 HP								
TINE THICKNESS	3/8"								
TINE SPACING	3"								
ROCK DAM REINFORCEMENT	Dual 1-1/4" Rods								
BUCKET EDGE	Finger / Versatech								



SNOW & LITTER BUCKET
HEAVY DUTY

MODEL	SNLB54	SNLB60	SNLB63	SNLB66	SNLB68	SNLB72	SNLB78	SNLB81	SNLB84	SNLB90	SNLB96	SNLB102	SNLB108
WEIGHT	296 Lbs.	329 Lbs.	457 Lbs.	478 Lbs.	469 Lbs.	497 Lbs.	539 Lbs.	545 Lbs.	565 Lbs.	607 Lbs.	615 Lbs.	653 Lbs.	685 Lbs.
WIDTH	54"	60"	63"	66"	68"	72"	78"	81"	84"	90"	96"	102"	108"
HEIGHT	27"												
BUCKET WRAP	3/16"												
RATED FOR	Up to 65 HP												
CUTTING EDGE	3/4" x 6"												
WEAR BARS & SIDE EDGE	3/8"												

SNOW & LITTER BUCKET
X-TREME DUTY

MODEL	SNLB60	SNLB63	SNLB66	SNLB68	SNLB72	SNLB74	SNLB78	SNLB81	SNLB84	SNLB90	SNLB96	SNLB102	SNLB108
WIDTH	60"	63"	66"	68"	72"	74"	78"	81"	84"	90"	96"	102"	108"
HEIGHT	27"												
BUCKET WRAP	1/4"												
RATED FOR	65-110 HP												
CUTTING EDGE	1" x 8"												
WEAR BARS & SIDE EDGE	1/2"												



SNOW & LITTER BUCKET

HEAVY DUTY HIGH CAPACITY

MODEL	HCSB60	HCSB66	HCSB72	HCSB78	HCSB84	HCSB90	HCSB96	HCSB102	HCSB108
WEIGHT	503 Lbs.	554 Lbs.	604 Lbs.	646 Lbs.	684 Lbs.	724 Lbs.	742 Lbs.	779 Lbs.	810 Lbs.
WIDTH	60"	66"	72"	78"	84"	90"	96"	102"	108"
HEIGHT	31"								
DEPTH	40"								
RATED FOR	Up to 65 HP								
CUTTING EDGE	3/4" x 6"								
WEAR BARS & SIDE EDGE	3/8"								
BUCKET WRAP	3/16"								

SNOW & LITTER BUCKET

X-TREME DUTY HIGH CAPACITY

MODEL	HCSB60	HCSB66	HCSB72	HCSB78	HCSB84	HCSB90	HCSB96	HCSB102	HCSB108
WIDTH	60"	66"	72"	78"	84"	90"	96"	102"	108"
HEIGHT	31"								
DEPTH	40"								
RATED FOR	65-110 HP								
CUTTING EDGE	1" x 8"								
WEAR BARS & SIDE EDGE	1/2"								
BUCKET WRAP	1/4"								

STUMP BUCKET
HEAVY DUTY



MODEL	SB
WEIGHT	277 Lbs.
WIDTH	27" at top, 16" at bottom
HEIGHT	24"
BUCKET DEPTH	40"
RATED FOR	Up to 65 HP
CUTTING EDGE	3/4" x 6"
WELDED TEETH	Included
WEAR BARS	3/8"
SIDE	3/8"

STUMP BUCKET
X-TREME DUTY



MODEL	XSB
WEIGHT	424 Lbs.
WIDTH	24" at top, 16" at bottom
HEIGHT	24"
BUCKET DEPTH	51"
RATED FOR	65-110 HP
CUTTING EDGE	1" x 8"
WELDED TEETH	Included
WEAR BARS	3/8"
SIDE	1/2"







TRACK LOADER BUCKET
X-TREME DUTY

MODEL	TAKB66	TAKB72	TAKB74	TAKB78	TAKB81	TAKB84	TAKB90	TAKB96
WEIGHT	644 Lbs.	717 Lbs.	723 Lbs.	764 Lbs.	787 Lbs.	811 Lbs.	867 Lbs.	923 Lbs.
WIDTH	66"	72"	74"	78"	81"	84"	90"	96"
HEIGHT	24"							
BUCKET DEPTH	34"							
RATED FOR	65+ HP							
CUTTING EDGE	1" x 8"							
ADD-ON TEETH	Optional							
BUCKET WRAP	1/4"							
WEAR BARS & SIDE EDGE	1/2"							
HEEL PLATE	1/2" AR400							



TRACK LOADER BUCKET
INDUSTRIAL

MODEL	ITAKB72	ITAKB74	ITAKB76	ITAKB78	ITAKB80	ITAKB84	ITAKB90	ITAKB96
WEIGHT	689 Lbs.	708 Lbs.	727 Lbs.	729 Lbs.	739 Lbs.	750 Lbs.	804 Lbs.	857 Lbs.
WIDTH	72"	74"	76"	78"	80"	84"	90"	96"
HEIGHT	21"							
BUCKET DEPTH	35"							
RATED FOR	65+ HP							
CUTTING EDGE	1" x 8"							
ADD-ON TEETH	Optional							
BUCKET WRAP	1/4"							
WEAR BARS & SIDE EDGE	1/2"							

***MOST COMPARABLE TO AN OEM BUCKET**



TURKEY LITTER BUCKET
HEAVY DUTY

MODEL	TLB60	TLB66	TLB72	TLB78	TLB81	TLB84	TLB90	TLB96
WEIGHT	526 Lbs.	579 Lbs.	631 Lbs.	684 Lbs.	779 Lbs.	808 Lbs.	826 Lbs.	881 Lbs.
WIDTH	60"	66"	72"	78"	81"	84"	90"	96"
RATED FOR	Up to 65 HP							
CUTTING EDGE	3/4" x 6"							
WEAR BARS & SIDE EDGE	3/8"							
BUCKET WRAP	3/16"							

TURKEY LITTER BUCKET
X-TREME DUTY

MODEL	TLB60	TLB66	TLB72	TLB78	TLB81	TLB84	TLB90	TLB96	TLB102	TLB108	TLB120
WIDTH	60"	66"	72"	78"	81"	84"	90"	96"	102"	108"	120"
RATED FOR	Up to 110 HP										
CUTTING EDGE	1" x 8"										
WEAR BARS & SIDE EDGE	1/2"										
BUCKET WRAP	1/4"										

CONCRETE BREAKER

FOR SKID STEERS


MODEL	CBR500	CBR650	CBR850	CBR1000	CBR1200
ENERGY CLASS	500 Ft-Lb	650 Ft-Lb	850 Ft-Lb	1000 Ft-Lb	1200 Ft-Lb
OPERATING WEIGHT	618 Lbs.	716 Lbs.	1,069 Lbs.	1,179 Lbs.	1,245 Lbs.
HOSE LENGTH	1/2"x 100"	1/2" x 100"	3/4" x 100"	3/4" x 100"	3/4" x 100"
OPERATING PRESSURE	1280-1707 PSI	1565-2347 PSI	1707-2702 PSI	1991-2702 PSI	1991 - 2418 PSI
TOOL DIAMETER	2.24"	2.75"	2.95"	3.15"	3.5"
FLOW RANGE	5-10 GPM	8-17 GPM	10-29 GPM	12-37 GPM	11-25 GPM
BLOW RATE	600-1490 BPM	550-1300 BPM	380-1100 BPM	380-1000 BPM	370 - 900 BPM
SUITABLE CARRIER	6,614 - 14,330 Lbs	6,614 - 14,330 Lbs.	9,921 - 17,637 Lbs.	9,921 - 17,637 Lbs.	12,000 - 20,000 Lbs.



CONCRETE CLAW

FOR SKID STEERS

MODEL	XCC
WEIGHT	631 Lbs.
WIDTH	24"
HEIGHT	22.5"
DEPTH	51"
SIDES	5/8" AR400
EDGE	1" x 8" w/Teeth

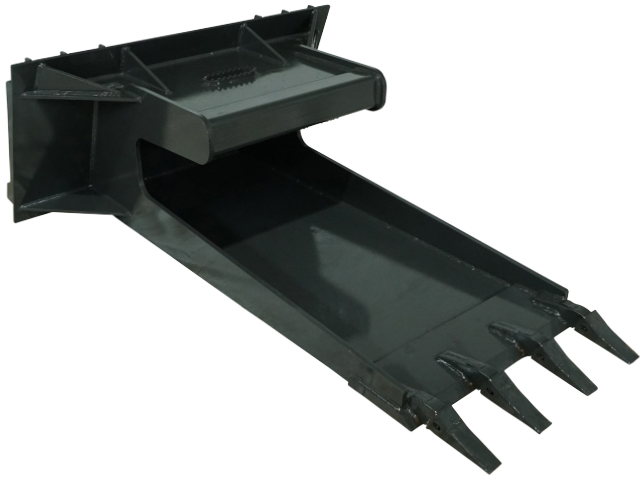

SKID STEER

CID offers a line of conversion plates allowing specific Pin on mounts or tractor mounts to convert to a variety of machines. After measurements are supplied, our engineers construct a custom adapter plate to match with the host machine.

Additionally, CID Conversion Plates extend across multiple Tractor mounts,

Euro/Quickie mounts, Telehandler mounts, and Mini mounts.

If your specific conversion is not listed, please contact our Sales Team for information.

BLANK TO SKID STEER	BTSS
BUSHHOG TO SKID STEER	BHTSS
GEHL TO SKID STEER	GTSS
MERLO TO SKID STEER	METSS
MUSTANG TO SKID STEER	MTSS
OLD STYLE NEW HOLLAND TO SKID STEER	OSNHTSS
QUICKIE TO SKID STEER	QTSS
SKID STEER TO DINGO	SSTD
SKID STEER TO JD 200, 300, 400	SSTJD400
SKID STEER TO JD500	SSTJD500
SKID STEER TO MT50	SSTMT50
SKID STEER TO QUICKIE	SSTQ

NEED SOME HELP? CONTACT US NCSALESTEAM@CIDATTACHMENTS.COM



4 WAY DOZER BLADE X-TREME DUTY

MODEL	4WD72	4WD84	4WD96
WEIGHT	835 Lbs.	853 Lbs.	860 Lbs.
WIDTH	72"	84"	96"
HEIGHT	29"		
DEPTH	36"		
CYLINDER SIZE	3 1/2" x 4"		
CUTTING EDGES	1/2" Replaceable		
EDGE MATERIAL	AR400		
WEAR SHOES & EDGE	Replaceable		



6 WAY DOZER BLADE X-TREME DUTY

MODEL	6WD72	6WD84	6WD96
WEIGHT	971 Lbs.	1,055 Lbs.	1,076 Lbs.
WIDTH	72"	84"	96"
HEIGHT	29"		
DEPTH	36"		
CYLINDER SIZE	3 1/2" x 4"		
CUTTING EDGES	1/2" Replaceable		
WIRING HARNESS OPTIONS	Universal, 14 Pin, 8 Pin, 7 Pin		
EDGE MATERIAL	AR400		
WEAR SHOES & EDGE	Replaceable		



ANGLE BLADE MULTI-PURPOSE

MODEL	MPAB72	MPAB84	MPAB96	MPAB108	MPAB120
WEIGHT	810 Lbs.	855 Lbs.	863 Lbs.	908 Lbs.	953 Lbs.
WIDTH	72"	84"	96"	108"	120"
HEIGHT	29"				
DEPTH	36"				
MATERIAL THICKNESS	3/16"				
CYLINDER SIZE	3" x 6"				
CUTTING EDGES	1/2" Replaceable				
MAX ANGLE	30°				
TRIP FEATURE	Spring Loaded Trip Edge for Snow Use				
EDGE MATERIAL	AR400				
WEAR SHOES & EDGE	Replaceable				



A



B



LAND LEVELER | A

FOR SKID STEERS

MODEL	LL48	LL60	LL72	LL78	LL84
WEIGHT	314 Lbs.	392 Lbs.	425 Lbs.	497 Lbs.	515 Lbs.
WIDTH	48"	60"	72"	78"	84"
HEIGHT	25"				
DEPTH	43"				
FRONT CUTTING EDGE	Replaceable				

BOX SCRAPE RIPPER | B

FOR SKID STEERS

MODEL	BSR60	BSR72	BSR78	BSR84	BSR96
WEIGHT	794 Lbs.	847 Lbs.	880 Lbs.	907 Lbs.	991 Lbs.
WIDTH	60"	72"	78"	84"	96"
HEIGHT	13"				
OVERALL LENGTH	57"				
TINES	Adjustable & Replaceable				
TINES: STANDARD-MAX	5-9			6-11	7-13
TINE SPACING	8"				
CUTTING EDGE HEIGHT	5"				
TINE DEPTH	6" - 10"				
CUTTING EDGE	Replaceable				
SHANKS	Replaceable				
EDGE MATERIAL	AR400				



RIPPER

X-TREME DUTY

MODEL	XR60	XR72	XR78	XR84	XR96
WEIGHT	300 Lbs.	347 Lbs.	369 Lbs.	372 Lbs.	404 Lbs.
WIDTH	60"	72"	78"	84"	96"
TINE SPACING	8"				
TINES	Adjustable & Replaceable				
TINE DEPTH	6" - 10"				
FINISHING RAKE	Optional				
TINES: STANDARD-MAX	5-9			6-11	7-13



FORK GRAPPLE X-TREME DUTY

MODEL	FG	FG5500	C3FG
WEIGHT	621 Lbs.	681 Lbs.	889 Lbs.
WIDTH	45"		
OPEN TINE HEIGHT	63"		
HEIGHT	35"		
CYLINDER SIZE	2" x 10"		
FORK TINE LENGTH	48"	48", 60" or 72"	48", 60" or 72", 96"
FORK MATERIAL	Heat Treated		
LIFT CAPACITY	4000 Lbs.	5500 Lbs.	8500 Lbs.
CLASS	CLass 2	Class 2	Class 3



MAT GRAPPLE X-TREME DUTY

MODEL	C3MG
WEIGHT	889 Lbs.
WIDTH	46"
OPEN TINE HEIGHT	79"
CLOSED TINE HEIGHT	37"
CYLINDER SIZE	2" x 10"
FORK TINE LENGTH	60" standard, 48" or 72" Optional
FORK MATERIAL	Heat Treated
LIFT CAPACITY	8500 Lbs
TINE TEETH	Included on grapple to grip mats
CLASS	Class 3
USAGE	Designed to lift equipment mats




MANURE FORK GRAPPLE X-TREME DUTY

MODEL	XMFG66	XMFG72	XMFG78	XMFG81	XMFG84	XMFG96
WEIGHT	830 Lbs.	877 Lbs.	897 Lbs.	944 Lbs.	954 Lbs.	1,090 Lbs.
WIDTH	66"	72"	78"	81"	84"	96"
OPEN TINE HEIGHT	40"					
DEPTH	34"					
RATED FOR	55+ HP					
CYLINDER SIZE	2" x 10"					
TINE THICKNESS	Top Tines: 1/2" Bottom Tines: 2" Cold Rolled Steel					



A

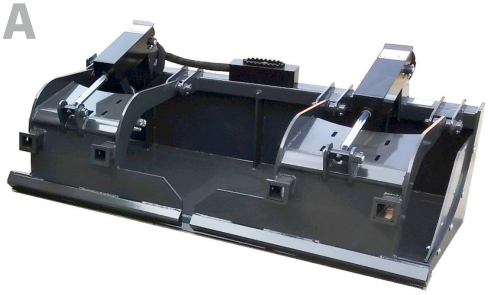

B



DEMOLITION GRAPPLE BUCKET | A

HEAVY DUTY

MODEL	HDDGB72	HDDGB78
WEIGHT	Lbs.	Lbs.
WIDTH	72"	78"
OPEN TINE HEIGHT	40"	
DEPTH	41"	
RATED FOR	45-65 HP	
CYLINDER SIZE	2" x 10"	
TINE THICKNESS	1/2" top tines	
BOLT ON SIDES	Included	
BOLT ON EDGE	Optional	
CUTTING EDGE	3/4" x 6"	

DEMOLITION GRAPPLE BUCKET | B

X-TREME DUTY

MODEL	XDDGB72	XDDGB78	XDDGB84
WEIGHT	Lbs.	Lbs.	Lbs.
WIDTH	72"	78"	84"
OPEN TINE HEIGHT	40"		
DEPTH	41"		
RATED FOR	65+ HP		
CYLINDER SIZE	2" x 10"		
TINE THICKNESS	5/8" top tines		
BOLT ON SIDES	Included		
BOLT ON EDGE	Optional		
CUTTING EDGE	1" x 8"		



GRAPPLE BUCKET
STANDARD DUTY

MODEL	SGB63	SGB66	SGB72
WEIGHT	632 Lbs.	664 Lbs.	727 Lbs.
WIDTH	63"	66"	72"
OPEN TINE HEIGHT	40"		
RATED FOR	Up to 45 HP		
CYLINDER SIZE	2" x 10"		
WELD ON TEETH	Optional		
TINE THICKNESS	3/8"		
CUTTING EDGE	6" x 1/2"		
BOLT ON SIDES	Optional		
BOLT ON EDGE	Optional		
CYLINDER ROD PROTECTOR	Optional		






GRAPPLE BUCKET
HEAVY DUTY

MODEL	HDGB60	HDGB63	HDGB66	HDGB72	HDGB78	HDGB81	HDGB84
WEIGHT	709 Lbs.	744 Lbs.	775 Lbs.	804 Lbs.	850 Lbs.	866 Lbs.	898 Lbs.
WIDTH	60"	63"	66"	72"	78"	81"	84"
OPEN TINE HEIGHT	40"						
RATED FOR	Up to 65 HP						
CYLINDER SIZE	2" x 10"						
ADD-ON TEETH	Optional						
TINE THICKNESS	1/2"						
CUTTING EDGE	6" x 3/4"						
BOLT ON SIDES	Included						
BOLT ON EDGE	Optional						
CYLINDER ROD PROTECTOR	Optional						





GRAPPLE BUCKET
X-TREME DUTY


MODEL	XGB66	XGB72	XGB78	XGB81	XGB84	XGB96
WEIGHT	1,034 Lbs.	1,071 Lbs.	1,098 Lbs.	1,126 Lbs.	1,154 Lbs.	1,266 Lbs.
WIDTH	66"	72"	78"	81"	84"	96"
OPEN TINE HEIGHT	40"					
RATED FOR	65+ HP					
CYLINDER SIZE	2" x 10"					
TOP TINE THICKNESS	5/8"					
CUTTING EDGE	1" x 8"					
WELD-ON TEETH	Optional					
BOLT ON SIDES	Included					
BOLT ON EDGE	Optional					
CYLINDER ROD PROTECTOR	Included					




GRAPPLE BUCKET
MONSTER DUTY

MODEL	MXDGB72	MXDGB78	MXDGB84	MXDGB96
WEIGHT	1,281 Lbs.	1,387 Lbs.	1,494 Lbs.	1,707 Lbs.
WIDTH	72"	78"	84"	96"
OPEN TINE HEIGHT	57"			
RATED FOR	75+ HP			
CYLINDER SIZE	2" x 10"			
TINE THICKNESS	5/8"			
BOLT ON EDGE	Optional			
WELD-ON TEETH	Optional			
BOLT ON SIDES	Included			
CYLINDER ROD PROTECTOR	Included			

A

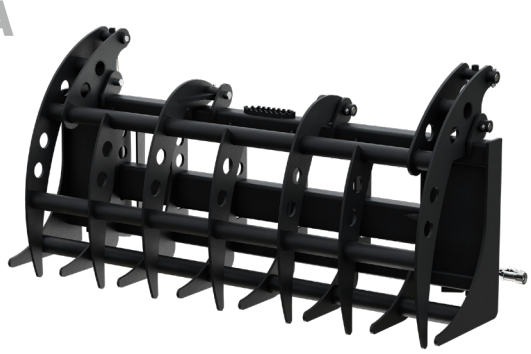

B

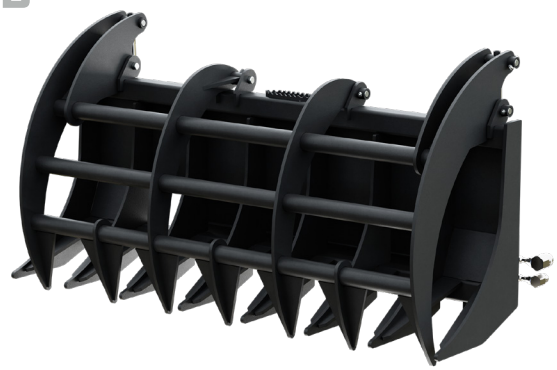

GRAPPLE RAKE | A

STANDARD DUTY

MODEL	ARSGR63	ARSGR66	ARSGR72
WEIGHT	425 Lbs.	455 Lbs.	550 Lbs.
WIDTH	63"	66"	72"
OPEN TINE HEIGHT	42"		
RATED FOR	35-60 HP		
MATERIAL THICKNESS	3/8" AR400 Steel		
CYLINDER SIZE	2" x 10"		

GRAPPLE RAKE | B

HEAVY DUTY

MODEL	HDGR63	HDGR66	HDGR72	HDGR78	HDGR81	HDGR84	HDGR96
WEIGHT	777 Lbs.	814 Lbs.	874 Lbs.	888 Lbs.	950 Lbs.	955 Lbs.	1,056 Lbs.
WIDTH	63"	66"	72"	78"	81"	84"	96"
OPEN TINE HEIGHT	51"						
MATERIAL THICKNESS	1/2"						
RATED FOR	50-70 HP						
CYLINDER SIZE	2" x 10"						
SPLIT TINES	Optional						



C



D



GRAPPLE RAKE | C

X-TREME DUTY


MODEL	XGR63T	XGR66T	XGR72T	XGR78T	XGR81T	XGR84T	XGR96T
WEIGHT	824 Lbs.	863 Lbs.	942 Lbs.	954 Lbs.	1,002 Lbs.	1,031 Lbs.	1,099 Lbs.
WIDTH	63"	66"	72"	78"	81"	84"	96"
OPEN TINE HEIGHT	51"						
RATED FOR	65+ HP						
CYLINDER SIZE	2" x 10"						
BOLT ON TEETH	Included & Replaceable						
TINE THICKNESS	1/2"						
MATERIAL THICKNESS	1/2"						
SPLIT TINES	Optional						

GRAPPLE RAKE | D


SEVERE DUTY

MODEL	SVGR72	SVGR84
WEIGHT	1,392 Lbs.	1,481 Lbs.
WIDTH	72"	84"
OPEN TINE HEIGHT	43"	
RATED FOR	75+ HP	
CYLINDER SIZE	2 -3/4" x 8"	
TINE THICKNESS	3/4"	
BOLT ON TEETH	Replaceable Teeth Included	
SPLIT TINES	Optional	

A

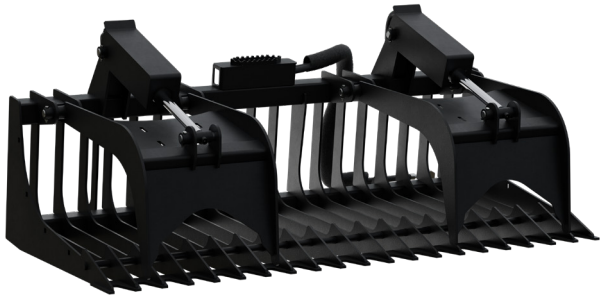

B

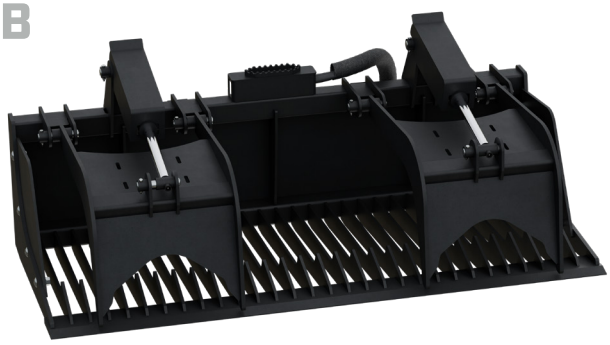

ROCK GRAPPLE | A

STANDARD DUTY


MODEL	SDROKG60	SDROKG63	SDROKG66	SDROKG72	SDROKG78	SDROKG81	SDROKG84
WEIGHT	623 Lbs.	628 Lbs.	632 Lbs.	653 Lbs.	674 Lbs.	685 Lbs.	697 Lbs.
WIDTH	60"	63"	66"	72"	78"	81"	84"
RATED FOR	45-60 HP						
CYLINDER SIZE	2" X 10"						
TINE SPACING	2-5/8"						
TINE THICKNESS	3/8"						
BUCKET EDGE	Finger / Versatech						
CYLINDER ROD COVER	Optional						

ROCK GRAPPLE | B

HEAVY DUTY

MODEL	HDROKG63	HDROKG66	H DROKG72	HDROKG78	HDROKG81	HDROKG84
WEIGHT	750 Lbs.	851 Lbs.	900 Lbs.	941 Lbs.	960 Lbs.	982 Lbs.
WIDTH	63"	66"	72"	78"	81"	84"
RATED FOR	50-75 HP					
CYLINDER SIZE	2" x 10"					
TINE SPACING	2 3/8"					
TOP TINE THICKNESS	1/2"					
BOTTOM TINE THICKNESS	3/8"					
CUTTING EDGE	3/4" x 6"					
WELD ON TEETH	Optional (Comes with 1" x 8" Upgraded Cutting Edge)					
CYLINDER ROD COVER	Optional					

C

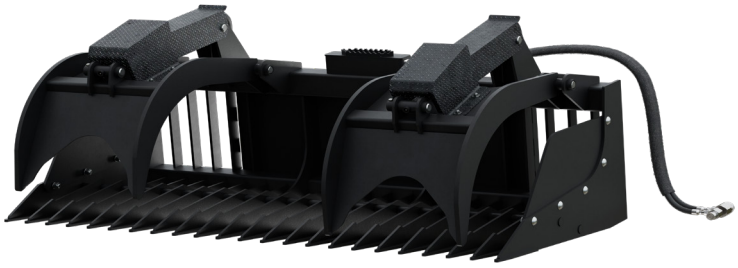

ROCK GRAPPLE | C

X-TREME DUTY

MODEL	XROKG60	XROKG66	XROKG72	XROKG78	XROKG81	XROKG84	XROKG90	XROKG96
WEIGHT	750 Lbs.	851 Lbs.	900 Lbs.	941 Lbs.	960 Lbs.	982 Lbs.	1,242 Lbs.	1,326 Lbs.
WIDTH	60"	66"	72"	78"	81"	84"	90"	96"
RATED FOR	75+ HP							
CYLINDER SIZE	2" x 10"							
TINE SPACING	2", 3" (Standard), 4"							
TOP TINE THICKNESS	5/8"							
BOTTOM TINE THICKNESS	3/8"							
ROCK DAM ENFORCEMENT	Dual 1-1/4" Rods							
BUCKET EDGE	Finger / Versatech							
CYLINDER ROD COVER	Included							



A



B



ROOT GRAPPLE | A

ULTRA LIGHT DUTY


MODEL	ULRG60	ULRG66	ULRG72
WEIGHT	537 Lbs.	564 Lbs.	579 Lbs.
WIDTH	63"	66"	72"
OPEN TINE HEIGHT	31"		
RATED FOR	30-50 HP		
CYLINDER SIZE	2" x 4 1/2"		
TINE SPACING	8"		
TINE THICKNESS	3/8"		
FRAME	3" x 3" Tubing		
SPACER TINES	Optional (Reduces Tine Spacing By Half)		

ROOT GRAPPLE | B

STANDARD DUTY

MODEL	SRG63	SRG66	SRG72	SRG78	SRG81	SRG84
WEIGHT	553 Lbs.	559 Lbs.	583 Lbs.	631 Lbs.	655 Lbs.	675 Lbs.
WIDTH	63"	66"	72"	78"	81"	84"
OPEN TINE HEIGHT	35"					
RATED FOR	Under 45 HP					
CYLINDER SIZE	2" x 10"					
TINE SPACING	8"					
TINE THICKNESS	3/8"					
FRAME	3" x 3" Tubing					
SPACER TINES	Optional (Reduces Tine Spacing By Half)					
CYLINDER ROD COVER	Optional					

C

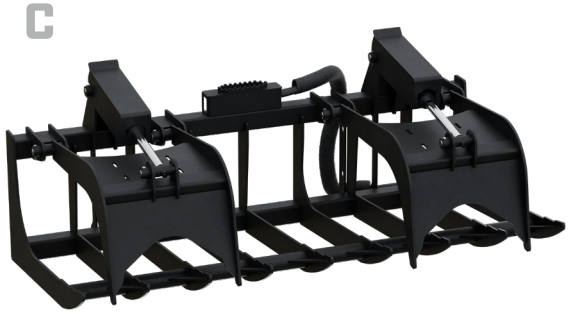

D



ROOT GRAPPLE | C

HEAVY DUTY

MODEL	HDRG60	HDRG63	HDRG66	HDRG72	HDRG78	HDRG81	HDRG84
WEIGHT	614 Lbs.	645 Lbs.	656 Lbs.	668 Lbs.	690 Lbs.	742 Lbs.	804 Lbs.
WIDTH	60"	63"	66"	72"	78"	81"	84"
OPEN TINE HEIGHT	35"						
RATED FOR	45-65 HP						
CYLINDER SIZE	2" x 10"						
TINE SPACING	8"						
TINE THICKNESS	1/2"						
FRAME	3" x 3" Tubing						
SPACER TINES	Optional (Reduces Tine Spacing By Half)						
CYLINDER ROD COVER	Optional						

ROOT GRAPPLE | D

X-TREME DUTY

MODEL	XRG63	XRG66	XRG72	XRG78	XRG81	XRG84	XRG90	XRG96
WEIGHT	843 Lbs.	859 Lbs.	911 Lbs.	920 Lbs.	962 Lbs.	969 Lbs.	991 Lbs.	1,015 Lbs.
WIDTH	63"	66"	72"	78"	81"	84"	90"	96"
DEPTH	42"							
OPEN TINE HEIGHT	38"							
RATED FOR	65+ HP							
CYLINDER SIZE	2" x 10"							
TINE SPACING	8"							
TOP TINE THICKNESS	5/8"							
BOTTOM TINE THICKNESS	1/2"							
FRAME	4" x 4" x 1/4" Tubing							
SPACER TINES	Optional (Reduces Tine Spacing By Half)							
CYLINDER ROD COVER	Included							

ROOT GRAPPLE SEVERE DUTY

MODEL	SVRG72	SVRG84
WEIGHT	1,074 Lbs.	1,144 Lbs.
WIDTH	72"	84"
OPEN TINE HEIGHT	41"	
RATED FOR	75+ HP	
CYLINDER SIZE	2 3/4" x 8"	
TINE SPACING	8"	
TOP TINE THICKNESS	3/4"	
BOTTOM TINE THICKNESS	1/2"	
FRAME	4" x 4" x 3/8" Tubing	
SPACER TINES	Optional (Reduces Tine Spacing By Half)	
PINS & BUSHINGS	Oversized	



ROOT GRAPPLE MONSTER DUTY

MODEL	MXDRG72	MXDRG78	MXDRG84	MXDRG96
WEIGHT	1,250 Lbs.	1,271 Lbs.	1,346 Lbs.	1,538 Lbs.
WIDTH	72"	78"	84"	96"
OPEN TINE HEIGHT	57"			
RATED FOR	75+ HP			
CYLINDER SIZE	2" x 10"			
TINE SPACING	8"			
TOP TINE THICKNESS	5/8"			
BOTTOM TINE THICKNESS	1/2"			
FRAME	4" x 4" Tubing			
CYLINDER ROD COVER	Included			



STUMP GRAPPLE FOR SKID STEERS

MODEL	SG
WEIGHT	525 Lbs.
BACK FRAME WIDTH	45"
DEPTH	36"
OPEN TINE HEIGHT	47"
CYLINDER SIZE	2" x 10"
CUTTING EDGE	1" x 8"
WELD ON TEETH	Included (Replaceable)
SIDES	1/2"



A



B



HAY ACCUMULATOR GRAPPLE | A

FOR SKID STEERS

MODEL	HAG10
WEIGHT	1,075 Lbs.
WIDTH	90"
HEIGHT	27"
LENGTH	93"
BALE CAPACITY	8-10 Square bales
CYLINDER SIZE	2" x 6"
GRAPPLE HOOKS	Replaceable
# OF GRAPPLE HOOKS	40
GRAPPLE HOOKS LENGTH	9"
SIDES	Removable

HAY GRAPPLE BUCKET | B

FOR SKID STEERS

MODEL	HBGB72	HBGB84	HBGB96
WEIGHT	1,079 Lbs.	1,259 Lbs.	1,364 Lbs.
WIDTH	72"	84"	96"
OPEN TINE HEIGHT	59"		
BUCKET WRAP	1/4"		
CYLINDER SIZE	2" x 10"		
CUTTING EDGE	3/4" x 6"		
ADJUSTABLE TINES	Replaceable		
BOLT ON EDGE	Optional		

HAY SPEAR SINGLE LOW BACK

MODEL	LBHS
WEIGHT	186 Lbs.
WIDTH	45"
HEIGHT	19"
SPEAR WORKING LENGTH	33" or 43" (Standard)
LOAD CAPACITY	2,800 Lbs.
STABILIZER SPEAR WORKING LENGTH	10" (Replaceable)




HAY SPEAR DOUBLE LOW BACK

MODEL	DLBHS
WEIGHT	203 Lbs.
WIDTH	45"
HEIGHT	23"
SPEAR WORKING LENGTH	32" or 42" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING OPTIONS	Fixed 32", 36", 40"



HAY SPEAR TRIPLE LOW BACK

MODEL	TLBHS
WEIGHT	233 Lbs.
WIDTH	45"
HEIGHT	23"
SPEAR WORKING LENGTH	32" or 42" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING	20"

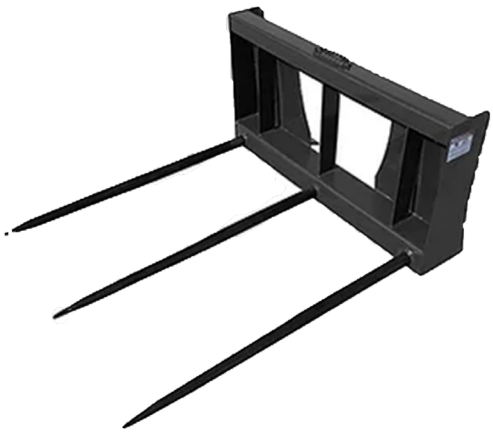

HAY SPEAR QUADRUPLE LOW BACK

MODEL	QUADLBHS
WEIGHT	280 Lbs.
WIDTH	103"
HEIGHT	24"
SPEAR WORKING LENGTH	32" or 43" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING	23"



HAY SPEAR SINGLE HIGH BACK

MODEL	HBHS
WEIGHT	217 Lbs.
WIDTH	45"
HEIGHT	31"
SPEAR WORKING LENGTH	33" or 43" (Standard)
LOAD CAPACITY	2800 Lbs.
STABILIZER SPEAR WORKING LENGTH	10" (Replaceable)



HAY SPEAR DOUBLE HIGH BACK

MODEL	DHBHS
WEIGHT	233 Lbs.
WIDTH	45"
HEIGHT	35"
SPEAR WORKING LENGTH	32" or 42" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING OPTIONS	Fixed 32", 36", 40"



HAY SPEAR TRIPLE HIGH BACK

MODEL	THBHS
WEIGHT	259 Lbs.
WIDTH	45"
HEIGHT	35"
SPEAR WORKING LENGTH	32" or 42" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING	20"



HAY SPEAR QUADRUPLE HIGH BACK

MODEL	QHBHS
WEIGHT	301 Lbs.
WIDTH	72"
HEIGHT	35"
SPEAR WORKING LENGTH	32" or 43" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING	23"



HAY SPEAR DOUBLE ADJUSTABLE

MODEL	DHBABS
WEIGHT	402 Lbs.
WIDTH	79"
HEIGHT	34"
LOAD CAPACITY	3,500 Lbs
WORKING SPEAR LENGTH	33" OR 43"
SPEAR WIDTH RANGE	18" - 72" (6" Increments)
STABILIZER SPEAR WORKING LENGTH	10" (Replaceable)
# OF STABILIZER SPEARS	4




BALE SQUEEZER HEAVY DUTY

MODEL	HDBS
WEIGHT	432 Lbs.
OPEN WIDTH	90"
# OF CYLINDERS	1
CYLINDER SIZE	3" x 6"
BALE CAPACITY	Up to 5' Bales
LIFT CAPACTIY	1800 Lbs



BALE SQUEEZER X-TREME DUTY

MODEL	XBS
WEIGHT	608 Lbs.
OPEN WIDTH	104"
# OF CYLINDERS	2
CYLINDER SIZE	2.5" x 8"
BALE CAPACITY	Up to 6' Bales
LIFT CAPACTIY	2,800 Lbs

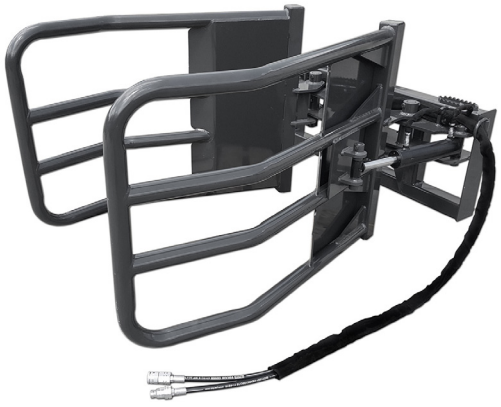

RECEIVER HITCH SKID STEER

MODEL	RH
WEIGHT	97 Lbs.
HITCH SIZE	2" Square Tube

RECEIVER HITCH GOOSE NECK

MODEL	GNRH
WEIGHT	111 Lbs.
HITCH SIZE	2" Square Tube
GOOSE NECK BALL	2 5/16" (Included)



GOOSE NECK PICTURED


LOG SPLITTER INVERTED

MODEL	ILS30T
WEIGHT	967 Lbs.
WIDTH	46"
HEIGHT	23"
DEPTH	90"
CYLINDER	40 Ton 5" x 30"
CUTTING HEAD	Removeable & Bolt On
CUTTING HEAD OPTIONS	2 Way or 4 Way
QUICK ATTACH POSITIONS	Rear & Side Mount Available
MAX LOG DIAMETER	30"
I-BEAM SIZE	10"



MANURE FORKS X-TREME DUTY

MODEL	XMF63	XMF66	XMF72	XMF78	XMF81	XMF84	XMF96
WEIGHT	522 Lbs.	547 Lbs.	596 Lbs.	646 Lbs.	671 Lbs.	696 Lbs.	795 Lbs.
WIDTH	63"	66"	72"	78"	81"	84"	96"
HEIGHT	22"						
DEPTH	33"						
TINE THICKNESS	2" cold rolled steel						
TINE SPACING	Approx 9"						
RATED FOR	55+ HP						

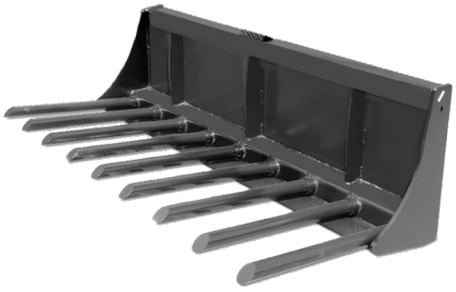

A



B



PALLET FORKS | A

STANDARD DUTY

MODEL	SDFRAME
WEIGHT (FRAME ONLY)	140 Lbs.
FRAME WIDTH	45"
MOUNT OPTIONS	John Deere, Universal, Euro, etc.
LOAD CAPACITY	3,000 Lbs
FORK TINE LENGTH	42" or 48"
TINE WIDTH	4"
TINE THICKNESS	1 1/4"

PALLET FORKS | B

HEAVY DUTY

MODEL	HDFRAME	HDFRAME5500
WEIGHT (FRAME ONLY)	160 Lbs.	170 Lbs.
FRAME WIDTH	46"	
MOUNT OPTIONS	John Deere, Universal, Euro, etc.	
LOAD CAPACITY	4,000 Lbs	5,500 Lbs
FORK TINE LENGTH	42" or 48"	42", 48", 60", 72"
TINE WIDTH	4"	
TINE THICKNESS	1 3/8"	1 1/2"



C



D





PALLET FORKS | C

X-TREME DUTY

MODEL	XDFRAME	XDFRAME60	XDFRAME72
WEIGHT (FRAME ONLY)	508 Lbs.	600 Lbs.	650 Lbs.
FRAME WIDTH	46"	60"	72"
MOUNT OPTIONS	John Deere, Universal, Euro, Tele, Versa, JCB, etc.		
LOAD CAPACITY	8,500 Lbs		
FORK TINE LENGTH	48", 60", 72", or 96"		
TINE WIDTH	5"		
FORK THICKNESS	1 3/4"		

PALLET FORKS | D

HEAVY DUTY WALK THROUGH

MODEL	WTFRAME	WTFRAME5500
WEIGHT (FRAME ONLY)	338 Lbs.	437 Lbs.
FRAME WIDTH	45"	
MOUNT OPTIONS	John Deere, Universal, Euro, etc.	
LOAD CAPACITY	4,000 Lbs.	5,500 Lbs.
FORK TINE LENGTH	42" or 48"	48", 60", 72"
TINE WIDTH	4"	
TINE THICKNESS	1 3/8"	1 1/2"

PALLET FORKS
HEAVY DUTY HYDRAULIC

MODEL	HHDFF	HHDFF5500
WEIGHT (FRAME ONLY)	411 Lbs.	440 Lbs.
FRAME WIDTH	45"	
MOUNT OPTIONS	Deere, Universal, Euro, etc.	Deere, Universal, Euro, Bush Hog, etc.
LOAD CAPACITY	4,000 Lbs.	5,500 Lbs.
CYLINDER SIZE	1 1/2" x 16"	
STEPS	Included	
FORK TINE LENGTH	42" or 48"	48", 60", 72"
TINE WIDTH	4"	
FORK THICKNESS	1 3/8"	1 1/2"



PALLET FORKS
X-TREME DUTY HYDRAULIC

MODEL	HXDFF
WEIGHT	632 Lbs.
FRAME WIDTH	46"
MOUNT OPTIONS	Deere, Universal, Euro, Tele, Versa, JCB
LOAD CAPACITY	8,500 Lbs.
CYLINDER SIZE	1 1/2" x 16"
STEPS	Included
FORK TINE LENGTH	48", 60", 72", 96"
TINE WIDTH	5"
FORK THICKNESS	1-1/2"



PALLET FORKS
WALK THROUGH HEAVY DUTY HYDRAULIC

MODEL	WTHHDFF	HWTFF5500
WEIGHT (FRAME ONLY)	400 Lbs.	415 Lbs.
FRAME WIDTH	46"	
MOUNT OPTIONS	Deere, Universal, Euro, etc.	Deere, Universal, Euro, Bush Hog, etc.
LOAD CAPACITY	4,000 Lbs.	5,500 Lbs.
CYLINDER SIZE	1 1/2" x 16"	
STEPS	Included	
FORK TINE LENGTH	42" or 48"	48", 60", 72"
TINE WIDTH	4"	
FORK THICKNESS	1 3/8"	1 1/2"







A



B



POST DRIVER | A

HEAVY DUTY

MODEL	PD750
WEIGHT	1,070 Lbs.
ENERGY CLASS	750 ft-lb
MINIMUM MACHINE LIFT CAPACITY	1,400 Lbs.
FLOW RANGE	11-24 GPM
WORKING PRESSURE	2000 PSI
BLOWS PER MINUTE	500-900
DOMED/FLAT DRIVER HEAD INNER DIAMETER	8"

POST DRIVER | B

X-TREME DUTY

MODEL	PD1000
WEIGHT	1,210 Lbs.
ENERGY CLASS	1,000 ft-lb
MINIMUM MACHINE LIFT CAPACITY	2,000 Lbs.
FLOW RANGE	21-30 GPM
WORKING PRESSURE	2200 PSI
BLOWS PER MINUTE	400-800
DOMED/FLAT DRIVER HEAD INNER DIAMETER	9"

POWER RAKE
X-TREME HYDRAULIC

MODEL	XPWR72	XPWR90
WEIGHT	1,041 Lbs	1,142 Lbs
WORKING WIDTH	72"	90"
OVERALL WIDTH	79"	98"
HEIGHT	27"	
DRUM HEIGHT	10"	
OUTSIDE DRUM DIAMETER	7 1/2"	
FLOW RANGE	15-25 GPM	
MOTOR	Inset Direct Drive Motor	
GUARD	Front & Back Debris Curtain	
TEETH INCLUDED	Carbide teeth	
DRUM	Bi-directional	
SIDE PLATES	Removable	
WHEEL TYPE	Solid Foam Filled Tires	
WIRING HARNESS OPTIONS	Universal, 7pin, 8pin or 14pin	

POWER RAKE
X-TREME MANUAL

MODEL	XPWR72M	XPWR90M
WEIGHT	941 Lbs.	1,041 Lbs.
WORKING WIDTH	72"	90"
OVERALL WIDTH	79"	98"
HEIGHT	27	
DRUM HEIGHT	10"	
OUTSIDE DRUM DIAMETER	7 1/2"	
FLOW RANGE	15-25 GPM	
MOTOR	Inset Direct Drive Motor	
GUARD	Front & Back Debris Curtain	
TEETH INCLUDED	Carbide teeth	
DRUM	Bi-directional	
SIDE PLATES	Removable	
WHEEL TYPE	Solid Foam Filled Tires	





POWER RAKE MULTI-PURPOSE

MODEL	MPPR72	MPPR78	MPPR84
WEIGHT	1,393 Lbs.	1,450 Lbs.	1,522 Lbs.
WORKING WIDTH	72"	78"	84"
DEPTH	47"		
HEIGHT	37"		
OPEN BUCKET HEIGHT	64"		
FLOW RANGE	15-25 GPM		
CYLINDER SIZE	2 1/2" x 8"		
# OF CYLINDERS	2		
DRUM SIZE	7 1/2"		
MOTOR	Inset Direct Drive Motor		
WIRING HARNESS OPTIONS	Universal, 7 pin, 8 pin, or 14 pin		
SIDE CUTTERS	Included		
PIVOT PINS	1 1/4"		
BOLT ON EDGE	Optional		
WELDED TEETH	Optional		





ROOT RAKE X-TREME DUTY

MODEL	XRR66	XRR72	XRR78	XRR84	XRR96
WEIGHT	450 Lbs.	484 Lbs.	512 Lbs.	554 Lbs.	622 Lbs.
WIDTH	66"	72"	78"	84"	96"
LENGTH	11"				
HEIGHT	34"				
TINE SPACING	6"				
RATED FOR	Up to 75 HP				
TINE THICKNESS	5/8"				

ROOT RAKE SEVERE DUTY

MODEL	SVRR72	SVRR84	SVRR96
WEIGHT	572 Lbs.	663 Lbs.	750 Lbs.
WIDTH	72"	84"	96"
LENGTH	12"		
HEIGHT	34"		
TINE SPACING	6"		
RATED FOR	75+ HP		
TINE THICKNESS	3/4"		
TINE MATERIAL	AR400		





SNOW PLOW
HEAVY DUTY HYDRAULIC

MODEL	HDSPLOW72	HDSPLOW84	HDSPLOW96	HDSPLOW108	HDSPLOW120
WEIGHT	720 Lbs.	776 Lbs.	815 Lbs.	843 Lbs.	953 Lbs.
WIDTH	72"	84"	96"	108"	120"
HEIGHT	32"				
DEPTH	46"				
RATED FOR	45+ HP				
MATERIAL THICKNESS	3/16"				
CYLINDER SIZE	3" x 6"				
CUTTING EDGE	1/2" AR400 Bolt on				
MAX ANGLE	30°				
SKID SHOE	Adjustable				
RUBBER EDGE	Optional				

SNOW PLOW
HEAVY DUTY MANUAL

MODEL	HDSPLOWM72	HDSPLOWM84	HDSPLOWM96	HDSPLOWM108	HDSPLOWM120
WEIGHT	732 Lbs.	776 Lbs.	825 Lbs.	928 Lbs.	1,031 Lbs.
WIDTH	72"	84"	96"	108"	120"
HEIGHT	32"				
DEPTH	46"				
RATED FOR	45+ HP				
MATERIAL THICKNESS	3/16"				
CUTTING EDGE	1/2" AR400 Bolt on				
MAX ANGLE	30°				
SKID SHOE	Adjustable				
RUBBER EDGE	Optional				







SNOW PLOW
X-TREME DUTY HYDRAULIC

MODEL	XSPLOW72	XSPLOW84	XSPLOW96	XSPLOW108	XSPLOW120	XSPLOW144
WEIGHT	812 Lbs.	857 Lbs.	948 Lbs.	1,062 Lbs.	1,180 Lbs.	1,311 Lbs.
WIDTH	72"	84"	96"	108"	120"	144"
HEIGHT	32"					
DEPTH	57"					
RATED FOR	65+ HP					
MATERIAL THICKNESS	3/16"					
CYLINDER SIZE	3" x 6"					
CUTTING EDGE	1/2" AR400 Bolt on					
MAX ANGLE	30°					
SKID SHOE	Adjustable					
RUBBER EDGE	Optional					
WIRING HARNESS OPTIONS	Universal, 7 pin, 8 pin, or 14 pin					

SNOW PLOW
X-TREME DUTY MANUAL

MODEL	XSPLOWM72	XSPLOWM84	XSPLOWM96	XSPLOWM108	XSPLOWM120	XSPLOWM144
WEIGHT	812 Lbs.	857 Lbs.	948 Lbs.	1,062 Lbs.	1,180 Lbs.	1,311 Lbs.
WIDTH	72"	84"	96"	108"	120"	144"
HEIGHT	32"					
DEPTH	57"					
RATED FOR	65+ HP					
MATERIAL THICKNESS	3/16"					
CYLINDER SIZE	3" x 6"					
CUTTING EDGES	1/2" AR400 Bolt on					
MAX ANGLE	30°					
SKID SHOE	Adjustable					
RUBBER EDGE	Optional					

SNOW BLOWER

X-TREME DUTY


MODEL	SBLOW60	SBLOW66	SBLOW72	SBLOW78	SBLOW84
WEIGHT	618 Lbs.	679 Lbs.	741 Lbs.	803 Lbs.	865 Lbs.
WIDTH	60"	66"	72"	78"	84"
AUGER DIAMETER	14"				
OVERALL HEIGHT	55"				
DEPTH	37"				
CHUTE ROTATION	180°				
FLOW RANGE	15-25 GPM				
WIRING HARNESS OPTIONS	Universal, 7pin, 8 pin, or 14pin				
CHUTE DEFLECTOR	Optional				
ELECTRONIC CONTROL	Optional				



SNOW PUSHER

X-TREME DUTY

MODEL	SPUSH60	SPUSH72	SPUSH84	SPUSH90	SPUSH96	SPUSH108	SPUSH120	SPUSH144
WEIGHT	713 Lbs.	775 Lbs.	836 Lbs.	904 Lbs.	971 Lbs.	985 Lbs.	1,052 Lbs.	1,133 Lbs.
WIDTH	60"	72"	84"	90"	96"	108"	120"	144"
HEIGHT	22"							
DEPTH	38"							
SIDES THICKNESS	3/8"							
MOLD BOARD THICKNESS	1/4"							
RUBBER EDGE	1 1/2" x 8" replaceable rubber edge							
BUCKET LIP MOUNT	Optional							
PULL BACK KIT	Optional							
SKID SHOE	Replaceable 3/4" AR400							

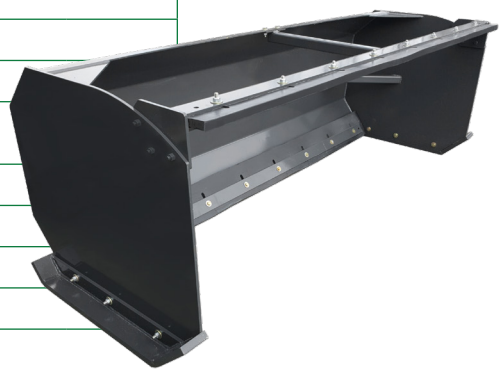

SOD ROLLER

FOR SKID STEERS

MODEL	SR
WEIGHT	231 Lbs.
SOD ROLL MAX WIDTH	48"
SOD ROLL MAX DIAMETER	60"
HEIGHT	20"
LENGTH	44"



STUMP GRINDER

FOR SKID STEERS

MODEL	STG1727	STG2030	STG3044
WEIGHT	836 Lbs.	841 Lbs.	846 Lbs.
WHEEL DIAMETER	27.5"		
FLOW RANGE	17-27 GPM	20-30 GPM	30-44 GPM
TOOTH TYPE	900 Series Wearsharp Green Teeth		
CASE DRAIN	Not Required	Required	Required
TEETH QUANTITY	30		







TILLER

LOW FLOW ROTARY

MODEL	XTLF72
WEIGHT	798 Lbs.
WIDTH	88"
WORKING WIDTH	72"
DEPTH	30"
FLOW RANGE	14-20 GPM
TILLING DEPTH	6"
MOTOR	Single Parker Motor w/ Internal Relief Valve
SIDES	3/8"
SKID SHOE THICKNESS	3/8"
HOUSING	1/4" Rolled Plate
BOLT-ON TINES	Replaceable
ROTATION	Bi-Directional

TILLER

HIGH FLOW ROTARY

MODEL	XTHF72	XTHF84
WEIGHT	852 Lbs.	950 Lbs.
WIDTH	94"	104"
WORKING WIDTH	72"	84"
DEPTH	30"	
FLOW RANGE	20-40 GPM	20-40 GPM
TILLING DEPTH	6"	
MOTOR	Dual Parker Motors w/ Internal Relief Valves	
SIDES	3/8"	
SKID SHOE THICKNESS	3/8"	
HOUSING	1/4" Rolled Plate	
BOLT-ON TINES	Replaceable	
ROTATION	Bi-Directional	

TREE & STUMP REMOVERS

A



B





TERMINATOR | A

TREE & STUMP REMOVER

MODEL	TTSR
WEIGHT	663 Lbs.
WIDTH	46"
OPEN WIDTH	48"
LENGTH	55"
HEIGHT	39"
MAX PULLING DIAMETER	12"
CYLINDERS	2
CYLINDER SIZE	3.5" x 4"
PIN SIZE	1.25"
PIVOT PIN SIZE	1.5"
# OF VERTICAL TEETH	34
VERTICAL TEETH MATERIAL	5/8" AR400
# OF HORIZONTAL TEETH	41
HORIZONTAL TEETH	3/4" AR400

TREE & POST PULLER | B

FOR SKID STEERS

MODEL	TPP
WEIGHT	280 Lbs.
WIDTH	45"
LENGTH	32"
CYLINDER SIZE	2 1/2" x 8"
MAX PULL DIAMETER	8"



C



D



TREE SAW | C

X-TREME DUTY FIXED

MODEL	FTS1723	FTS2030
WEIGHT	907 Lbs.	911 Lbs.
WIDTH	37"	
HEIGHT	45"	
DEPTH	83"	
BLADE DIAMETER	30"	
FLOW RANGE	17-30 GPM	20-30 GPM
BLADE HOLDER	1/2" AR400	
CASE DRAIN	Not Required	Required
CUTTING TEETH	900 Series Wearsharp Green Teeth	
PUSH BAR	Included	

TREE SAW | D


X-TREME DUTY MANUAL ROTATING

MODEL	MTS1723	MTS2030
WEIGHT	867 Lbs.	909 Lbs.
WIDTH	37"	
HEIGHT	45"	
DEPTH	83"	
BLADE DIAMETER	30"	
FLOW RANGE	17-30 GPM	20-30 GPM
BLADE HOLDER	1/2" AR400	
CASE DRAIN	Not Required	Required
CUTTING TEETH	900 Series Wearsharp Green Teeth	

TREE SHEAR

MANUAL & HYDRALIC

MODEL	TRSHM	TRSH-HYD	NRTS
WEIGHT	999 Lbs.	1,056 Lbs.	977 Lbs.
WIDTH	50"		
HEIGHT	46"		
DEPTH	44"		
SHEAR FORCE	40 Tons		
SHEAR CYLINDER	5" x 12"		
BLADES	1" AR400		
CUT CAPACITY	12" Diameter Trees		
DEGREE OF ROTATION	90°		No Rotation
ROTATION CYLINDER	N/A	2" x 12"	N/A
WIRING HARNESS OPTIONS	N/A	Universal, 7-pin, 8-pin, 14-pin	N/A

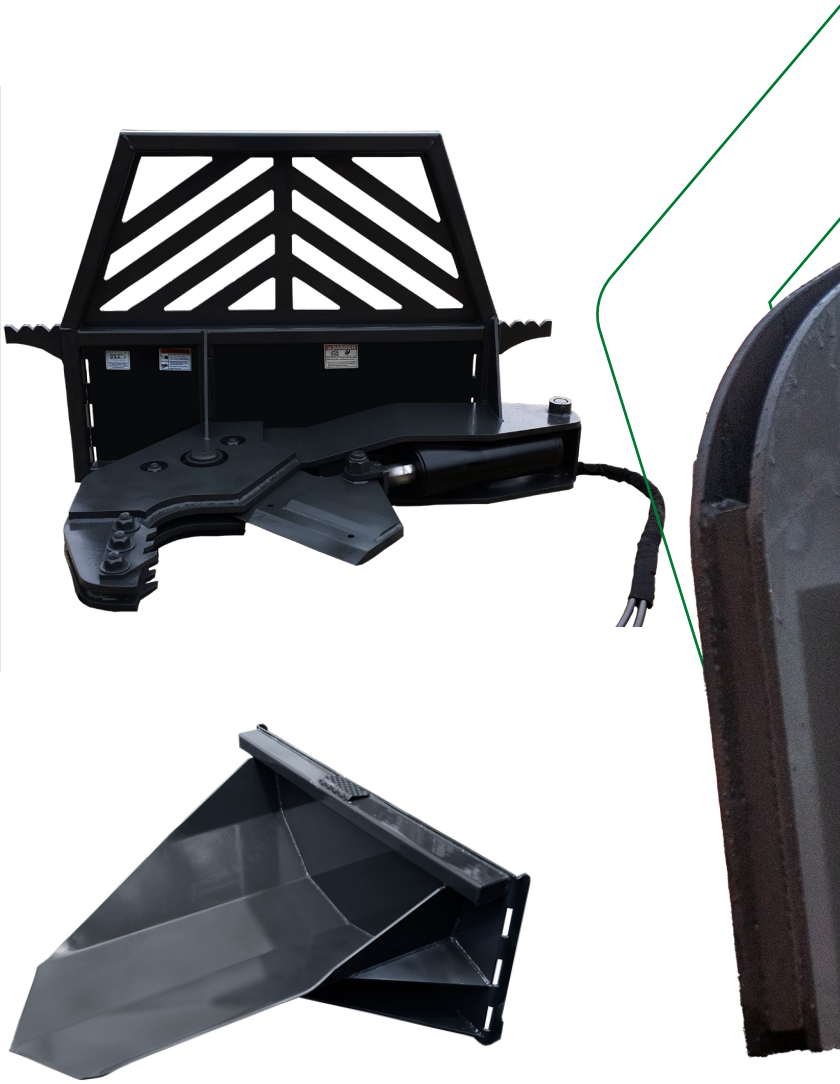

TREE SPADE


FOR SKID STEERS

MODEL	TREESPADE40	TREESPADE48
WEIGHT	246 Lbs.	270 Lbs.
WIDTH	46"	
HEIGHT	19"	
DEPTH	40"	48"

TRENCHER

X-TREME DUTY

MODEL	XTRENCH36	XTRENCH48
WEIGHT	668 Lbs.	686 Lbs.
WIDTH	48"	
HEIGHT	25"	
CHAIN LENGTH	36"	48"
CHAIN WIDTH	6" or 8"	
CHAIN TYPES	Dirt, Dirt & Rock Combo, or Rock & Frost	
FLOW REQUIREMENT	15-20 or 20-30 GPM	
AUGER DIAMETER	15"	

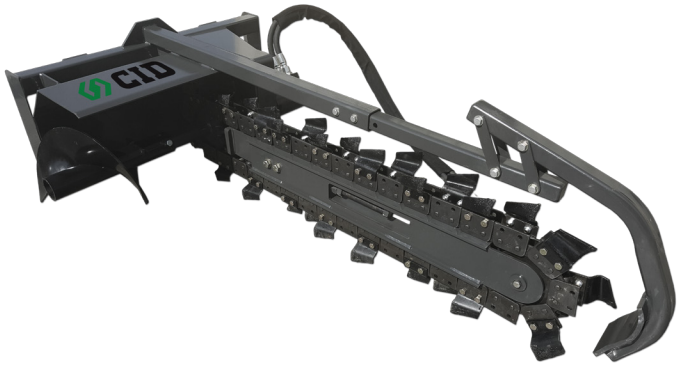

TRENCHERS



MINI SKID STEER

ATTACHMENTS



AUGER DRIVE MINI

MODEL	MINIADH	MINIADR
WEIGHT	300 Lbs.	
FLOW RANGE	10-15 GPM	
SHAFT OPTIONS	2" Hex	2 9/16" Round
TORQUE @ 3500 PSI	3020 ft. lbs.	
DRIVE SYSTEM	Direct Drive through Planetary Gear	
BIT SIZES AVAILABLE	4", 6", 9", 12", 15", 18", 20", 24", 30", 36"	
BIT TYPES AVAILABLE	Earth, Rock, Tree	
MOUNT OPTIONS AVAILABLE	Dingo, Bobcat MT, Alternates available	





BIG PERFORMANCE IN TIGHT SPACES

Mini skid steer attachments are perfect when you need big performance in tight spaces. They're fast, easy to maneuver, and let you tackle tough jobs without bringing in bigger, bulkier equipment.

MINI SKID STEER

A



B



C



EARTH | A AUGER BITS

MODEL	Earth Auger Bits									
WIDTH	4"	6"	9"	12"	15"	18"	20"	24"	30"	36"
WEIGHT	47 Lbs.	51 Lbs.	95 Lbs.	118 Lbs.	133 Lbs.	166 Lbs.	185 Lbs.	201 Lbs.	280 Lbs.	448 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round									

TREE | B AUGER BITS

MODEL	Tree Auger Bits			
WIDTH	18"	24"	30"	36"
WEIGHT	144 Lbs.	200 Lbs.	268 Lbs.	352 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round			

ROCK | C AUGER BITS

MODEL	Rock Auger Bits					
WIDTH	4"	6"	9"	12"	18"	24"
WEIGHT	50 Lbs.	85 Lbs.	112 Lbs.	138 Lbs.	201 Lbs.	291 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round					





AUGER ADAPTORS

MODEL	CID9135	CID9167	CID9141	CID8084
ADAPTOR TYPE	2 9/16" Round Drive to 2" Hex Adaptor	2" Hex Drive to 2 9/16" Round Adaptor	2 9/16" Round Drive to 2" Round Adaptor	2" Round to 2 9/16" Round Adaptor
WEIGHT	15 lbs.			



AUGER EXTENSIONS

MODEL	Auger Extensions			
WIDTH	24"	36"	48"	60"
WEIGHT	45 Lbs.	62 Lbs.	79 Lbs.	96 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round			



10" STUMP PLANER

MODEL	10" Stump Planer
WEIGHT	60 Lbs.
WIDTH	10"
CUTTING DEPTH	18"
CUTTING TEETH	3 Blade Tool Steel Sharpenable Blades
SHAFT OPTIONS	2" Hex
MIN. TORQUE REQUIREMENT	2200 ft-lbs
PLANER PILOT	Replaceable Spiral Pilot and Pilot Blades



MINI SKID STEER

BOOM POLE MINI

MODEL	MINIBP
WEIGHT	124 Lbs.
LOAD CAPACITY	3000 Lbs.
TUBING	3" x 3"
MOUNT OPTIONS AVAILABLE	Dingo, Bobcat MT, Alternates available









PICK UP BROOM MINI

MODEL	PUBROOM48
WEIGHT	992 Lbs.
WIDTH	48"
FLOW RANGE	10-25 GPM
BRISTLE TYPE	All Poly, All Wire, 50/50 Mix
CORE	8" Core 26" Bristle
WAFERS	1 Place Tubing Bristles
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available

HYDRAULIC BROOM MINI

MODEL	XHAB48	XHAB60
WEIGHT	785 Lbs.	833 Lbs.
WIDTH	48"	60"
FLOW RANGE	6-12 GPM or 10-15 GPM	
BRISTLE TYPE	All Poly, All Wire, 50/50 Mix	
CORE	8" Core 26" Bristle	
WAFERS	Individual Replaceable Wafers	
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available	

MANUAL BROOM MINI

MODEL	XMAB48	XMAB60
WEIGHT	770 Lbs.	833 Lbs.
WIDTH	48"	60"
FLOW RANGE	6-12 GPM or 10-15 GPM	
BRISTLE TYPE	All Poly, All Wire, 50/50 Mix	
CORE	8" Core 26" Bristle	
WAFERS	Individual Replaceable Wafers	
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available	

MINI SKID STEER



TREE REAPER MINI BRUSH CUTTER

MODEL	TRD-40	TRD-48
WEIGHT	558 Lbs.	634 Lbs.
WORKING WIDTH	40"	48"
MOTOR	High Torque Motor	
CASE DRAIN	Not Required	
FLOW RANGE	10-15 GPM, 14-20 GPM, or 16-26 GPM	
# OF BLADES	2	
BLADE MATERIAL	5/8" AR400	
CUTTING CAPACITY	4"	
SKID SHOES	Replaceable	
AVAILABLE MOUNTS	Dingo and MT50	Dingo, MT50, RC30, and Universal



4-IN-1 BUCKET MINI

MODEL	MINI4N1-36	MINI4N1-44	MINI4N1-48	MINI4N1-54	MINI4N1-60	MINI4N1-66	MINI4N1-72
WEIGHT	301 Lbs.	368 Lbs.	380 Lbs.	445 Lbs	511 Lbs.	565 Lbs.	610 Lbs.
WIDTH	36"	44"	48"	54"	60"	66"	72"
CYLINDER SIZE	2" x 6"						
CUTTING EDGE	1/2" X 4"						
BOTTOM WRAP	1/4"						
BACK WRAP	10 Gauge						
WELD ON TEETH	Optional						
BOLT ON EDGE	Optional						
AVAILABLE MOUNTS	Dingo, Bobcat MT, RC30, Alternates available						



CONCRETE BUCKET MINI

MODEL	MINI1/4YCB
WEIGHT	253 Lbs.
BUCKET CAPACITY	1/4 Yard
MATERIAL THICKNESS	3/16"
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available



LOW PROFILE BUCKET MINI

MODEL	MB1534	MB1536	MB1542	MB1544	MB1548	MB1552	MB1554
WEIGHT	198 Lbs.	221 Lbs.	238 Lbs.	240 Lbs.	241 Lbs.	248 Lbs.	258 Lbs.
WIDTH	34"	36"	42"	44"	48"	52"	54"
BUCKET HEIGHT	15"						
CUTTING EDGE	1/2" × 4"						
WELD ON TEETH	Optional						
BUCKET WRAP	3/16"						
WEAR BARS	3/8"						
SIDES	3/16"						
SIDE EDGES	1/4"						
BOLT ON EDGE	Optional						
AVAILABLE MOUNTS	Dingo, Alternates available						



X-TREME LOW PROFILE BUCKET MINI

MODEL	MB2034	MB2036	MB2042	MB2044	MB2048	MB2052	MB2054
WIDTH	34"	36"	42"	44"	48"	52"	54"
BUCKET HEIGHT	20"						
CUTTING EDGE	1/2" × 6"						
WELD ON TEETH	Optional						
BUCKET WRAP	1/4"						
WEAR BARS	3/8"						
SIDES	1/4"						
SIDE EDGES	3/8"						
BOLT ON EDGE	Optional						
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates Available						



A



B



ROCK BUCKET | A MINI

MODEL	MINIRB36	MINIRB44	MINIRB48	MINIRB54	MINIRB60	MINIRB66	MINIRB72
WEIGHT	145 Lbs.	174 Lbs.	190 Lbs.	210 Lbs.	241 Lbs.	273 Lbs.	301 Lbs.
WIDTH	36"	44"	48"	54"	60"	66"	72"
TINE SPACING	2						
TINE THICKNESS	5/16						
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available						

SNOW & LITTER BUCKET | B MINI

MODEL	DSNLB36	DSNLB42	DSNLB44	DSNLB48	DSNLB52	DSNLB54	DSNLB60
WEIGHT	219 Lbs.	225 Lbs.	237 Lbs.	245 Lbs.	262 Lbs.	273 Lbs.	285 Lbs.
WIDTH	36"	42"	44"	48"	52"	54"	60"
CUTTING EDGE	1/2" x 4"						
WEAR BARS	3/8"						
SIDES	3/16"						
SIDE EDGE	1/4"						
BUCKET WRAP	3/16"						
BOLT ON EDGE	Optional						
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available						

A



B



X-TREME SNOW & LITTER BUCKET | A MINI

MODEL	DSNLB36	DSNLB42	DSNLB44	DSNLB48	DSNLB52	DSNLB54	DSNLB60
WIDTH	36"	42"	44"	48"	52"	54"	60"
CUTTING EDGE	1/2" x 6"						
WEAR BARS	3/8"						
SIDES	1/4"						
SIDE EDGE	3/8"						
WRAP	1/4"						
BOLT ON EDGE	Optional						
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available						

STUMP BUCKET | B MINI

MODEL	SB
WEIGHT	277 Lbs.
WIDTH	27" at top, 16" at bottom
DEPTH	40"
RATED FOR	Up to 45 HP
CUTTING EDGE	3/4" x 6"
WELD ON TEETH	Included
WEAR BARS & SIDES	3/8"
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available

CONCRETE BREAKER MINI

MODEL	CBR225	CBR500
ENERGY CLASS	225 ft. lbs.	500 ft. lbs.
WEIGHT	408 Lbs.	618 Lbs.
HOSE LENGTH	1/2" x 90"	1/2" x 100"
OPERATING PRESSURE	1280-1707 PSI	1280-1707 PSI
TOOL DIAMETER	1.77"	2.24"
OIL FLOW	4 - 8 GPM	5 - 10 GPM
BLOW RATE	540-1000 BPM	600-1490 BPM
SUITABLE CARRIER	1,600-5,000 Lbs.	6,614-14,330 Lbs.



CONVERSIONS MINI



BLANK TO SKID STEER	BTSS
DINGO TO MT50	DTMT50
DINGO TO SKID STEER	DTSS
MT50 TO DINGO	MT50TD
MT50 TO SKID STEER	MT50TSS
RC30 TO DINGO	RC30TD
RC30 TO SKID STEER	RC30TSS

NEED SOME HELP? CONTACT US NCSALESTEAM@CIDATTACHMENTS.COM

LAND LEVELER MINI

MODEL	MINILL36	MINILL44	MINILL48	MINILL60
WEIGHT	135 Lbs.	149 Lbs.	159 Lbs.	199 Lbs.
WIDTH	36"	44"	48"	60"
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available			




ROOT GRAPPLE MINI

MODEL	MINIRG36	MINIRG42	MINIRG44	MINIRG48	MINIRG54	MINIRG60	MINIRG66	MINIRG72
WIDTH	36"	42"	44"	48"	54"	60"	66"	72"
WEIGHT	219 Lbs.	233 Lbs.	245 Lbs.	257 Lbs.	271 Lbs.	295 Lbs.	320 Lbs.	335 Lbs.
# OF CYLINDERS	Single Cylinder			Single or Dual Available				
CYLINDER SIZE	2" x 4 1/2"							
TINE THICKNESS	5/16"							
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available							



GRAPPLE RAKE MINI

MODEL	MINI-GRDC36	MINI-GRDC44	MINI-GRDC48	MINI-GRDC54	MINI-GRDC60	MINI-GRDC66	MINI-GRDC72
WIDTH	36"	44"	48"	54"	60"	66"	72"
WEIGHT	230 Lbs.	252 Lbs.	271 Lbs.	284 Lbs.	301 Lbs.	324 Lbs.	350 Lbs.
OPEN TINE HEIGHT	33"						
CYLINDER SIZE	2" x 6"						
TINE THICKNESS	5/16"						
RATED FOR	40 HP						
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available						

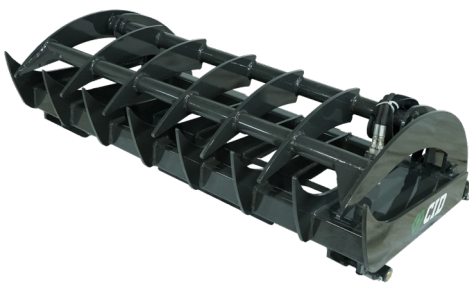

STUMP GRAPPLE MINI

MODEL	MINISG
WEIGHT	418 Lbs.
CYLINDER SIZE	2" x 10"
CUTTING EDGE	1/2" x 6"
TEETH	Included
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available



GRAPPLE BUCKET MINI

MODEL	MINIGB36	MINIGB42	MINIGB44	MINIGB48	MINIGB54
WIDTH	36"	42"	44"	48"	54"
WEIGHT	347 Lbs.	355 Lbs.	367 Lbs.	378 Lbs.	390 Lbs.
OPEN TINE HEIGHT	32"				
CUTTING EDGE	1/2" x 4"				
CYLINDER SIZE	2" x 4-1/2"				
WELD ON TEETH	Optional				
BOLT ON EDGE	Optional				
BUCKET WRAP	3/16"				
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available				



X-TREME GRAPPLE BUCKET MINI

MODEL	MINIGB36	MINIGB42	MINIGB44	MINIGB48	MINIGB54
WIDTH	36"	42"	44"	48"	54"
OPEN TINE HEIGHT	32"				
CUTTING EDGE	1/2" x 6"				
CYLINDER SIZE	2" x 4-1/2"				
WELD ON TEETH	Optional				
BOLT ON EDGE	Optional				
BUCKET WRAP	1/4"				
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available				



MINI SKID STEER



ROCK GRAPPLE BUCKET MINI

MODEL	MINIROKG36	MINIROKG44	MINIROKG48
WIDTH	36"	44"	48"
WEIGHT	288 Lbs.	352 Lbs.	384 Lbs.
CYLINDER SIZE	2" x 4 1/2"		
TINE SPACING	2"		
TINE THICKNESS	5/16"		
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available		



RECEIVER HITCH MINI

MODEL	RH
WEIGHT	97 Lbs.
HITCH SIZE	2" Square Tube
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available



GOOSE NECK MINI RECEIVER HITCH

MODEL	GNRH
WEIGHT	111 Lbs.
BALL SIZE	2 5/16" for Goose Neck
HITCH SIZE	2" Square Tube
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available

PALLET FORKS MINI

MODEL	DPF (Dingo) MTPF (MT)
WEIGHT	269-305 Lbs.
FRAME WIDTH	Dingo: 30", MT: 36"
TINE WIDTH	4"
LOAD CAPACITY	2,800 Lbs.
FORK TINE LENGTH	36", 42", 48"
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available




MULTI PURPOSE POWER RAKE MINI

MODEL	MPPR44
WIDTH	44"
WEIGHT	1,413 Lbs.
FLOW RANGE	10-25 GPM
DRUM DIAMETER	7-1/2"
MOTOR	Inset Direct Drive Motor
CYLINDER SIZE	2" x 6" Dual Cylinders
WIRING HARNESS	Universal, 7pin, 8pin, or 14pin
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available





MINI POWER RAKE

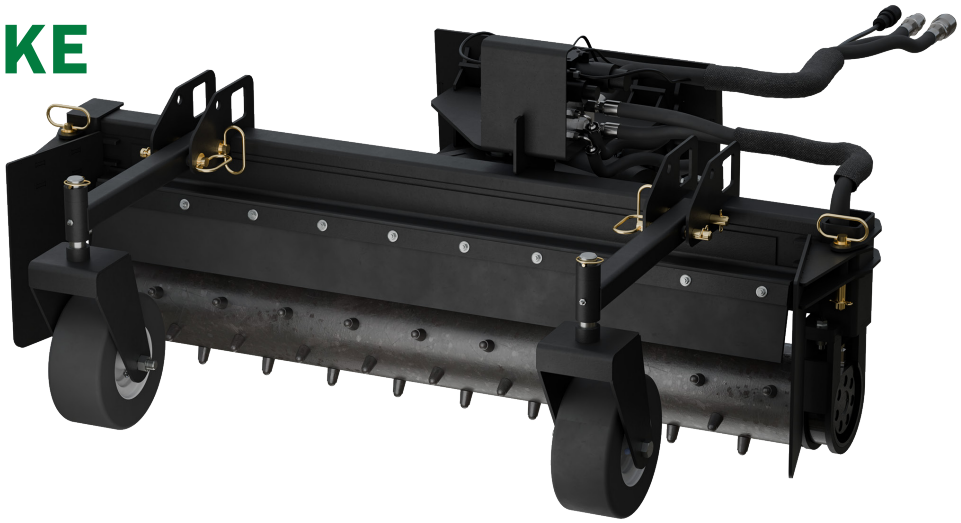

HYDRAULIC POWER RAKE

MODEL	MINI-XPWR36	MINI-XPWR48	MINI-XPWR60
WIDTH	36"	48"	60"
WEIGHT	599 Lbs.	655 Lbs.	758 Lbs.
DRUM DIAMETER	7 1/2"		
FLOW RANGE	10-25 GPM		
MOTOR	Inset Direct Drive Motor		
DRUM	Bi-Directional		
ANGLE ROTATION	25 Degree		
TILT ANGLE	22 Degree Free Float		
# OF TEETH	48	64	80
WIRING HARNESS OPTIONS	Universal, 7 Pin, 8 Pin, and 14 Pin		
AVAILABLE MOUNTS	Dingo, Bobcat MT, RC30, Alternates available		

MANUAL POWER RAKE

MODEL	MINI-XPWRM36	MINI-XPWRM48	MINI-XPWRM60
WIDTH	36"	48"	60"
WEIGHT	551 Lbs.	593 Lbs.	698 Lbs.
DRUM DIAMETER	7 1/2"		
FLOW RANGE	10-25 GPM		
MOTOR	Inset Direct Drive Motor		
DRUM	Bi-Directional		
ANGLE ROTATION	25 Degree		
TILT ANGLE	22 Degree Free Float		
# OF TEETH	48	64	80
AVAILABLE MOUNTS	Dingo, Bobcat MT, RC30, Alternates available		









Powered By
Parker

HYDRAULIC SNOW PLOW MINI

MODEL	MINIPLOW48	MINIPLOW54	MINIPLOW60	MINIPLOW66	MINIPLOW72	MINIPLOW84
WIDTH	48"	54"	60"	66"	72"	84"
WEIGHT	437 Lbs.	453 Lbs.	469 Lbs.	487 Lbs.	502 Lbs.	527 Lbs.
ANGLE ADJUSTMENT	30 Degrees					
CYLINDER	2" x 4 1/2"					
OPTIONAL EDGE MATERIAL	Rubber or AR400 Steel					
OPTIONAL EDGE THICKNESS	Rubber: 1 1/2" AR400 Steel: 3/8"					
WIRING HARNESS OPTIONS	Universal, 7 Pin, 8 Pin, and 14 Pin					
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available					

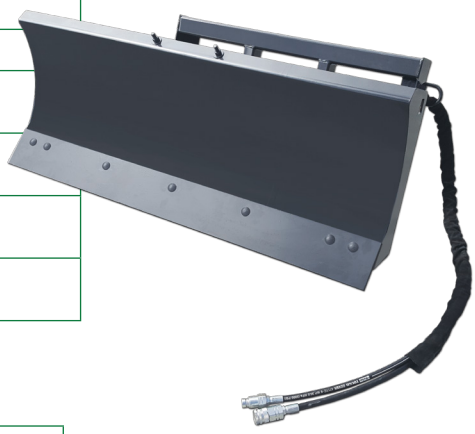


MANUAL SNOW PLOW MINI

MODEL	MINIPLOW48	MINIPLOW54	MINIPLOW60	MINIPLOW66	MINIPLOW72	MINIPLOW84
WIDTH	48"	54"	60"	66"	72"	84"
WEIGHT	437 Lbs.	453 Lbs.	469 Lbs.	487 Lbs.	502 Lbs.	527 Lbs.
ANGLE ADJUSTMENT	30 Degrees					
CYLINDER	2" x 4 1/2"					
OPTIONAL EDGE MATERIAL	Rubber or AR400 Steel					
OPTIONAL EDGE THICKNESS	Rubber: 1 1/2" AR400 Steel: 3/8"					
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available					

SNOW PUSHER MINI

MODEL	MINISPUSH48	MINISPUSH60	MINISPUSH72	MINISPUSH84	MINISPUSH96
WIDTH	48"	60"	72"	84"	96"
WEIGHT	285 Lbs.	309 Lbs.	333 Lbs.	360 Lbs.	394 Lbs.
SIDES	5/16"				
SKID SHOES	Replaceable 1/2" AR400				
OPTIONAL EDGE MATERIAL	Rubber: 1 1/2" x 8" AR400 Steel: 1/2"				
OPTIONAL PULL BACK BAR MATERIAL	Rubber: 1" x 6" AR400 Steel: 1/2"				
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available				

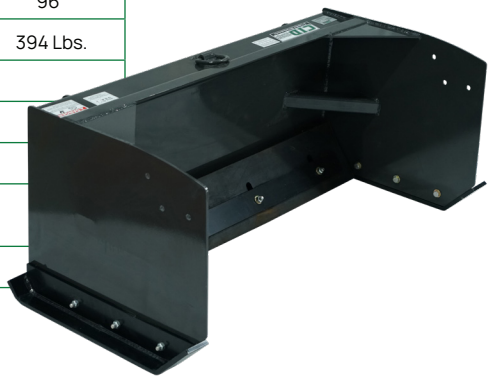

RIPPER MINI

MODEL	MINIR44	MINIR48
WEIGHT	220 Lbs	240 Lbs
WIDTH	44"	48"
LENGTH BETWEEN TINES	7"	
ADJUSTABLE TINE DEPTH	6-10"	
FINISHING RAKE	Optional	
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available	



TILLER MINI

MODEL	MINITIL44	MINITIL54
WEIGHT	561 Lbs.	602 Lbs.
WIDTH	44"	54"
FLOW RANGE	10-20 GPM	
TILLING DEPTH	6"	
HOUSING	1/4" Rolled Plate	
SIDES	3/8"	
TINES	Bolt-on & Replaceable	
NUMBER OF TINES	24	28
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available	



TRENCHER MINI

MODEL	MTCH-36	MTCH-48
WEIGHT	561 Lbs.	590 Lbs.
CHAIN LENGTH	36"	48"
CHAIN WIDTH	4" or 6"	
CHAIN TYPES	Dirt, Rock & Frost, Dirt & Rock Combo	
FLOW REQUIREMENT	6-12 GPM, 12-18 GPM, or 18-30 GPM	
AUGER DIAMETER	10"	
AVAILABLE MOUNTS	Dingo, Bobcat MT, Alternates available	








TRACTOR

ATTACHMENTS



COMPACT TRACTOR

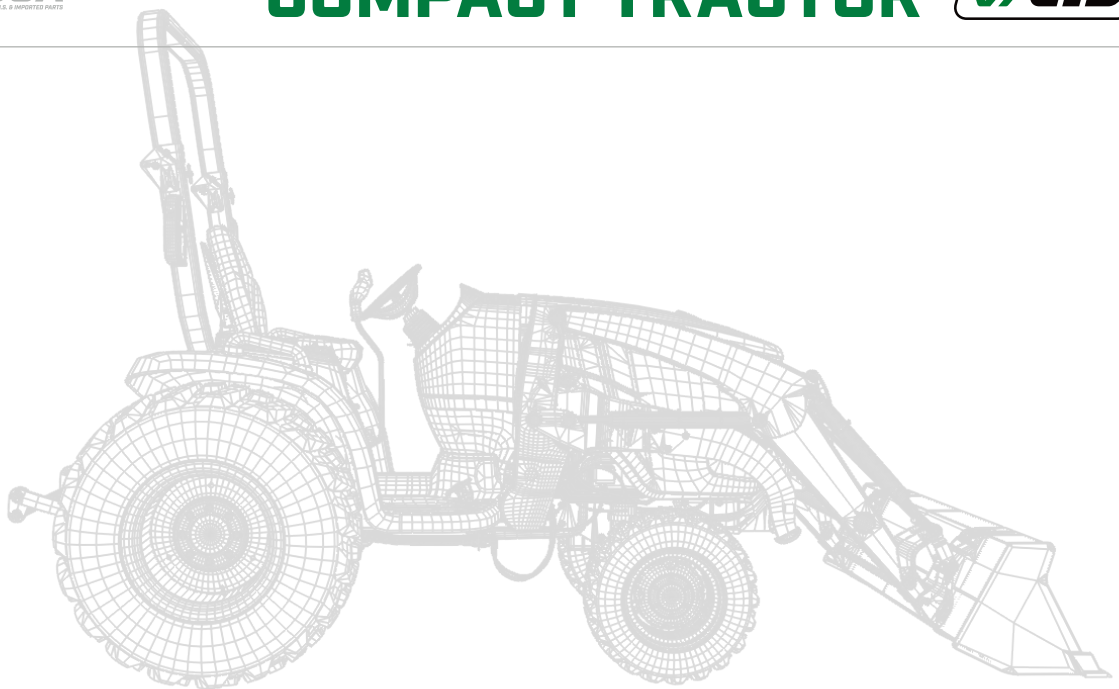

AUGER DRIVE COMPACT TRACTOR

MODEL	HAD	RAD
WEIGHT	300 Lbs.	
FLOW RANGE	15-25 GPM	
SHAFT OPTIONS	2" Hex	2 9/16" Round
TORQUE @ 3500 PSI	3020 ft. lbs.	
DRIVE SYSTEM	Direct Drive through Planetary Gear	
BIT SIZES	4", 6", 9", 12", 15", 18", 20", 24", 30", 36"	
BIT TYPES	Earth, Rock, Tree	

AUGER BITS COMPACT TRACTOR

MODEL	EARTH AUGER BITS	TREE AUGER BITS	ROCK AUGER BITS
WEIGHT	47 -448 Lbs.	144-352 Lbs.	50-291 Lbs.
BIT SIZES	4", 6", 9", 12", 15", 18", 20", 24", 30", 36"	18", 24", 30", 36"	4", 6", 9", 12", 18", 24"
DRIVE SHAFTS	2" Hex or 2 9/16" Round		

THE DO-IT-ALL WORKHORSE

Tractor attachments turn your everyday workhorse into a do-it-all machine. Whether you're moving dirt, clearing brush, or lifting heavy loads, they help you get more done without switching machines.

4 IN 1 BUCKET COMPACT TRACTOR

MODEL	MINI4N1-54	MINI4N1-60	MINI4N1-66	MINI4N1-72
WEIGHT	445 Lbs	511 Lbs.	565 Lbs.	610 Lbs.
WIDTH	54"	60"	66"	72"
CYLINDER SIZE	2" x 6"			
CUTTING EDGE	1/2" x 4"			
BOTTOM WRAP	1/4"			
BACK WRAP	10 Gauge			
BOLT ON EDGE	Optional			
WELD ON TEETH	Optional			



BUCKET COMPACT TRACTOR

MODEL	CTRAC48	CTRAC54	CTRAC60	CTRAC63	CTRAC66	CTRAC66	CTRAC72
WEIGHT	361 Lbs.	406 Lbs.	381 Lbs.	401 Lbs.	419 Lbs.	425 Lbs.	458 Lbs.
WIDTH	48"	54"	60"	63"	66"	66"	72"
HEIGHT	25"						
DEPTH	28"						
RATED FOR	Up to 45 HP						
CUTTING EDGE	1/2" x 4"						
BUCKET WRAP	3/16"						
BOLT ON EDGE	Optional						



HEAVY-DUTY BUCKET COMPACT TRACTOR

MODEL	TRAC63	TRAC66	TRAC72	TRAC78	TRAC81	TRAC84
WEIGHT	435 Lbs.	455 Lbs.	478 Lbs.	500 Lbs.	525 Lbs.	535 Lbs.
WIDTH	63"	66"	72"	78"	81"	84"
HEIGHT	25"					
DEPTH	28"					
RATED FOR	45-65 HP					
CUTTING EDGE	3/4" x 6"					
BUCKET WRAP	3/16"					
BOLT ON EDGE	Optional					



X-TREME DUTY BUCKET COMPACT TRACTOR

MODEL	XTRAC72	XTRAC78	XTRAC84	XTRAC90	XTRAC96	XTRAC102	XTRAC108
WEIGHT	653 Lbs.	707 Lbs.	740 Lbs.	800 Lbs.	975 Lbs.	1,036 Lbs.	1,097 Lbs.
WIDTH	72"	78"	84"	90"	96"	102"	108"
HEIGHT	29"						
DEPTH	34"						
RATED FOR	65+ HP						
CUTTING EDGE	3/4" x 6"						
BUCKET WRAP	3/16"						
BOLT ON EDGE	Optional						
BUCKET DESIGN	Rolled						



ROCK BUCKET COMPACT TRACTOR

MODEL	CTRB48	CTRB54	CTRB60	CTRB66	CTRB72
WEIGHT	400 Lbs.	420 Lbs.	430 Lbs.	485 Lbs.	490 Lbs.
WIDTH	48"	54"	60"	66"	72"
HEIGHT	20"				
DEPTH	28"				
TINE SPACING	3"				
TINE THICKNESS	5/16"				
RATED FOR	Under 35 HP				



STUMP BUCKET COMPACT TRACTOR

MODEL	SB
WEIGHT	277 Lbs.
WIDTH	27" at top, 16" at bottom
DEPTH	40"
RATED FOR	Under 45 HP
CUTTING EDGE	3/4" x 6"
ADD-ON TEETH	Included
WEAR BARS & SIDE EDGE	3/8"



CID COMPACT TRACTOR





PICK UP BROOM TRACTOR

MODEL	PUBROOM48
WEIGHT	992 Lbs.
WIDTH	48"
FLOW RANGE	10-25 GPM
BRISTLE TYPE	All Poly, All Wire, 50/50 Mix
CORE	8" Core 26" Bristle
WAFERS	1 Piece Tubing Bristles

HYDRAULIC BROOM TRACTOR

MODEL	XHAB48	XHAB60
WEIGHT	785 Lbs.	833 Lbs.
WIDTH	48"	60"
FLOW RANGE	6-12 GPM or 10-15 GPM	
BRISTLE TYPE	All Poly, All Wire, 50/50 Mix	
CORE	8" Core 26" Bristle	
WAFERS	Individual Replaceable Wafers	

MANUAL BROOM TRACTOR

MODEL	XMAB48	XMAB60
WEIGHT	770 Lbs.	833 Lbs.
WIDTH	48"	60"
FLOW RANGE	6-12 GPM or 10-15 GPM	
BRISTLE TYPE	All Poly, All Wire, 50/50 Mix	
CORE	8" Core 26" Bristle	
WAFERS	Individual Replaceable Wafers	

CONVERSIONS COMPACT TRACTOR



BLANK TO SKID STEER	BTSS
3 POINT HITCH QUICK ATTACH - CAT 1	3PTQAP
3 POINT HITCH QUICK ATTACH - CAT 2	3PTQAPCAT2
JD 200, 300, 400 TO SKID STEER	JD234TSS
JD 200, 400, 500 TO SKID STEER	JD245TSS
JD 500 TO SKID STEER	JD500TSS
JD 600, 700 TO JD 500	JD67TJD500
JD 600, 700 TO SKID STEER	JD67TSS
PIN ON TO SKID STEER	POTSS
YANMAR TO SKID STEER	YLTSS

NEED SOME HELP? CONTACT US NCSALESTEAM@CIDATTACHMENTS.COM

A



B



ROCK GRAPPLE | A COMPACT TRACTOR


MODEL	CTROKG48	CTROKG54	CTROKG60	CTROKG66	CTROKG72
WEIGHT	291 Lbs.	328 Lbs.	364 Lbs.	397 Lbs.	420 Lbs.
WIDTH	48"	54"	60"	66"	72"
OPEN GRAPPLE HEIGHT	35"				
DEPTH	28"				
CYLINDER SIZE	2" x 4 1/2"				
TINE SPACING	3"				
TINE THICKNESS	5/16"				
RATED FOR	45 HP or less				

SINGLE CYLINDER


ROOT GRAPPLE | B COMPACT TRACTOR

MODEL	CTRG48	CTRG54	CTRG60	CTRG66	CTRG72
WEIGHT	310 Lbs.	320 Lbs.	323 Lbs.	333 Lbs.	367 Lbs.
WIDTH	48"	54"	60"	66"	72"
HEIGHT	30"				
DEPTH	31"				
TINE THICKNESS	5/16"				
TINE SPACING	Approx 7"-8"				
RATED FOR	35 HP or less				
CYLINDER SIZE	2" x 4 1/2"				

A

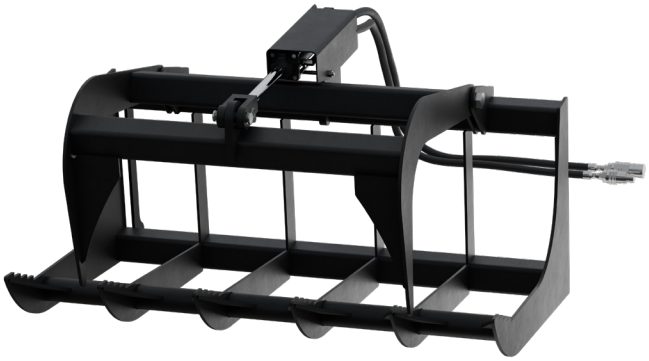

B

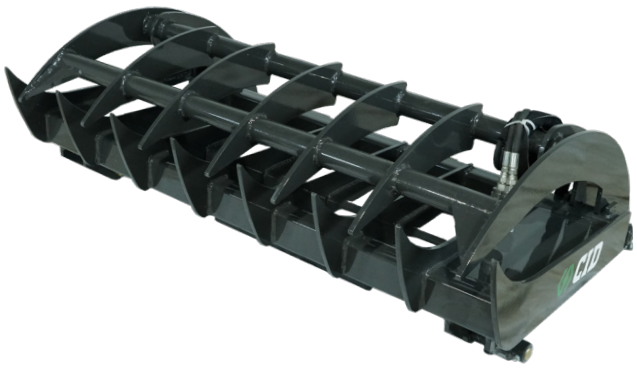

ECONOMY ROOT GRAPPLE | A COMPACT TRACTOR

MODEL	SCERG48	SCERG60 or ERG60	SCERG66 or ERG66	SCERG72 or ERG72	ERG78	ERG84
WEIGHT	322 Lbs.	367-430 Lbs.	377-462 Lbs.	409-485 Lbs.	510 Lbs.	533 Lbs.
WIDTH	48"	60"	66"	72"	78"	84"
HEIGHT	29"					
DEPTH	38"					
TINE THICKNESS	5/16"					
TINE SPACING	9"					
RATED FOR (HP)	Up to 45 HP					
# OF CYLINDERS	Single Cylinder	Single or Dual Cylinders Available			Dual Cylinders	
CYLINDER	2" x 8"					

GRAPPLE RAKE | B COMPACT TRACTOR

MODEL	CTGR48	CTGR54	CTGR60 or CTGRDC60	CTGR63 or CTGRDC63	CTGR66 or CTGRDC66	CTGR72 or CTGRDC72
WEIGHT	277 Lbs.	299 Lbs.	334-474 Lbs.	338-512 Lbs.	342-547 Lbs.	378-592 Lbs.
WIDTH	48"	54'	60"	63"	66"	72"
OPEN HEIGHT	33"					
DEPTH	17"					
RATED FOR	40 HP or less					
# OF CYLINDERS	Single Cylinder Available		Single or Dual Cylinders Available			
CYLINDER SIZE	2" x 4 1/2"					

C



D



GRAPPLE BUCKET | C COMPACT TRACTOR

MODEL	CTGB48	CTGB54	CTGB60	CTGB66	CTGB72
WEIGHT	368 Lbs.	379 Lbs.	506 Lbs.	541 Lbs.	568 Lbs.
WIDTH	48"	54"	60"	66"	72"
OPEN HEIGHT	36"				
BUCKET WRAP	3/16"				
RATED FOR	35 HP or less				
# OF CYLINDERS	1				
EDGE	1/2" x 6"				
CYLINDER SIZE	2" x 4 1/2"				
BOLT ON EDGE	Optional				
WELD ON TEETH	Optional				

STUMP GRAPPLE | D COMPACT TRACTOR

MODEL	CTSG
WEIGHT	418 Lbs.
CYLINDER SIZE	2" x 10"
CUTTING EDGES	1/2" x 6"
WELD ON TEETH	Included

MANURE FORK GRAPPLE COMPACT TRACTOR

MODEL	CTMFG54	CTMFG60	CTMFG66	CTMFG72
WEIGHT	364 Lbs.	404 Lbs.	516 Lbs.	527 Lbs.
WIDTH	54"	60"	66"	72"
OPEN HEIGHT	32"			
DEPTH	30"			
RATED FOR	Under 55 HP			
TINE THICKNESS	1-1/2" Cold Rolled Steel			
CYLINDER SIZE	2" x 10"			



MANURE FORKS COMPACT TRACTOR

MODEL	CTMF48	CTMF54	CTMF60	CTMF66	CTMF72
WEIGHT	249 Lbs.	280 Lbs.	309 Lbs.	340 Lbs.	371 Lbs.
WIDTH	48"	54"	60"	66"	72"
TINE SPACING	1-1/2" cold rolled steel				
RATED FOR	Under 55 HP				



PALLET FORKS COMPACT TRACTOR

MODEL	CTFF
WEIGHT	249 Lbs.
FRAME WIDTH	45"
FRAME HEIGHT	31"
MOUNT OPTIONS	Universal SS, John Deere, Yanmar
FORK MATERIAL	Heat Treated
LOAD CAPACITY	2,000 lbs
FORK TINE LENGTH	42" & 48"
FORK THICKNESS	1 3/16"
FORK WIDTH	3"



HAY SPEAR SINGLE LOW BACK

MODEL	LBHS
WEIGHT	186 Lbs.
WIDTH	45"
HEIGHT	19"
SPEAR WORKING LENGTH	33" or 43" (Standard)
LOAD CAPACITY	2,800 Lbs.
STABILIZER SPEAR WORKING LENGTH	10" (Replaceable)




HAY SPEAR DOUBLE LOW BACK

MODEL	DLBHS
WEIGHT	203 Lbs.
WIDTH	45"
HEIGHT	23"
SPEAR WORKING LENGTH	32" or 42" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING OPTIONS	Fixed 32", 36", 40"



HAY SPEAR TRIPLE LOW BACK

MODEL	TLBHS
WEIGHT	233 Lbs.
WIDTH	45"
HEIGHT	23"
SPEAR WORKING LENGTH	32" or 42" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING	20"

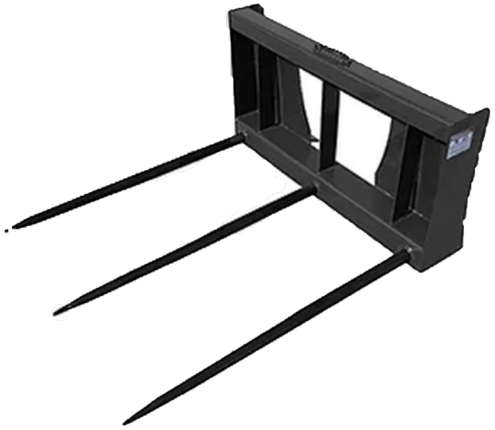

HAY SPEAR QUADRUPLE LOW BACK

MODEL	QUADLBHS
WEIGHT	280 Lbs.
WIDTH	103"
HEIGHT	24"
SPEAR WORKING LENGTH	32" or 43" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING	23"



HAY SPEAR SINGLE HIGH BACK

MODEL	HBHS
WEIGHT	217 Lbs.
WIDTH	45"
HEIGHT	31"
SPEAR WORKING LENGTH	33" or 43" (Standard)
LOAD CAPACITY	2,800 Lbs.
STABILIZER SPEAR WORKING LENGTH	10" (Replaceable)



HAY SPEAR DOUBLE HIGH BACK

MODEL	DHBHS
WEIGHT	233 Lbs.
WIDTH	45"
HEIGHT	35"
SPEAR WORKING LENGTH	32" or 42" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING OPTIONS	Fixed 32", 36", 40"



HAY SPEAR TRIPLE HIGH BACK

MODEL	THBHS
WEIGHT	259 Lbs.
WIDTH	45"
HEIGHT	35"
SPEAR WORKING LENGTH	32" or 42" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING	20"



HAY SPEAR QUADRUPLE HIGH BACK

MODEL	QHBHS
WEIGHT	301 Lbs.
WIDTH	72"
HEIGHT	35"
SPEAR WORKING LENGTH	32" or 43" (Standard)
LOAD CAPACITY	3,500 Lbs.
SPEAR SPACING	23"



TRACTOR RECEIVER HITCH

MODEL	RH
WEIGHT	97 Lbs
HITCH SIZE	2" Square Tube

GOOSE NECK RECEIVER HITCH

MODEL	GNRH
WEIGHT	111 Lbs.
BALL SIZE	2 5/16" for GN
HITCH SIZE	2" Square Tube




MANUAL SNOW PLOW COMPACT TRACTOR

MODEL	CTSPLOWM48	CTSPLOWM54
WIDTH	48"	54"
WEIGHT	365 Lbs.	411 Lbs.
CYLINDER	2" x 4 1/2"	
RATED FOR	Up to 45 HP	
ANGLE ADJUSTMENT	30 Degrees	
OPTIONAL EDGE MATERIAL	Rubber or Steel	
OPTIONAL EDGE THICKNESS	Rubber: 1 1/2" Edge: 3/8"	



HYDRAULIC SNOW PLOW COMPACT TRACTOR

MODEL	CTSPLOW48	CTSPLOW54
WIDTH	48"	54"
WEIGHT	365 Lbs.	411 Lbs.
CYLINDER	2" x 4 1/2"	
RATED FOR	Up to 45 HP	
ANGLE ADJUSTMENT	30 Degrees	
OPTIONAL EDGE MATERIAL	Rubber or Steel	
OPTIONAL EDGE THICKNESS	Rubber: 1 1/2" Edge: 3/8"	



SNOW PUSHER COMPACT TRACTOR


MODEL	CTSPUSH48	CTSPUSH60
WIDTH	48"	60"
WEIGHT	285 Lbs.	309 Lbs.
SIDES	5/16"	
SKID SHOES	Replaceable 1/2" AR400	
OPTIONAL EDGE MATERIAL	Rubber or AR400 Steel	
OPTIONAL EDGE THICKNESS	Rubber: 1 1/2" x 8" Steel: 1/2"	
OPTIONAL PULL BACK BAR MATERIAL	Rubber or AR400 Steel	
PULL BACK BAR EDGE THICKNESS	Rubber: 1" x 6" Steel: 1/2"	





MINI EXCAVATOR

ATTACHMENTS

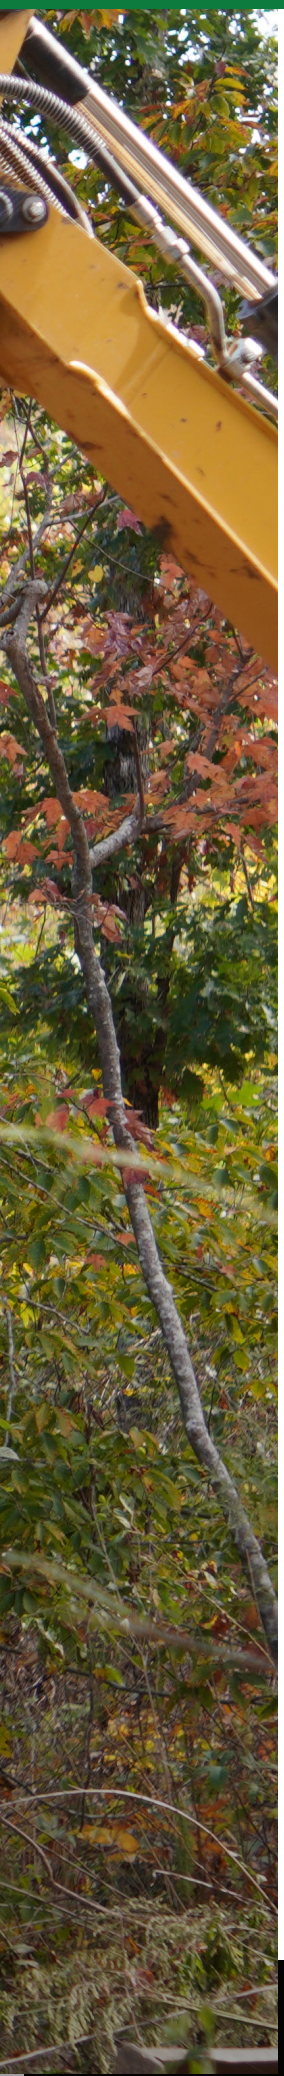

MINI EXCAVATOR

MINI EXCAVATOR

AUGER DRIVE

MODEL	HAD	RAD	XHAD
WEIGHT	300 Lbs.		340 Lbs.
FLOW RANGE	15-25 GPM		
SHAFT OPTIONS	2" Hex	2-9/16" Round	2" Hex
TORQUE AT 3500 PSI	3020 ft. lbs.		3150 ft. lbs.
DRIVE SYSTEM	Direct Drive through Planetary Gear		
BIT SIZES AVAILABLE	4", 6", 9", 12", 15", 18", 20", 24", 30", 36", 48"		
BIT TYPES AVAILABLE	Earth, Rock, Tree		
MOUNTS AVAILABLE	Kubota, Bobcat, John Deere, Takeuchi, Wain Roy, Case, CAT, Alternates available		



VERSATILITY WITHOUT THE BULK

Mini excavator attachments pack serious power into a compact machine, making tough jobs possible in tight spots. From digging and grading to clearing and lifting, they give you versatility without the bulk.

MINI EXCAVATOR

A



B



C



EARTH | A AUGER BITS

MODEL	Earth Auger Bits
WIDTH AVAILABLE	4", 6", 9", 12", 15", 18", 20", 24", 30", 36", 48"
WEIGHT	47-448 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round

TREE | B AUGER BITS

MODEL	Tree Auger Bits
WIDTH AVAILABLE	18", 24", 30", 36"
WEIGHT	144-352 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round

ROCK | C AUGER BITS

MODEL	Rock Auger Bits
WIDTH AVAILABLE	4", 6", 9", 12", 15", 18", 20", 24"
WEIGHT	150-291 Lbs.
DRIVE SHAFT OPTIONS	2" Hex or 2 9/16" Round



A



B



BRUSH CUTTER

STANDARD DUTY EXCAVATOR

MODEL	SDEXBC91542	SDEXBC142042	SDEXBCSTAR44
WEIGHT (W/O MOUNT)	552 Lbs.	700 Lbs.	645 Lbs.
WORKING WIDTH	48"		
MOTOR	Gerotor Motor		Radial Piston Motor
CASE DRAIN	Not Required		
FLOW RANGE	12-17 GPM	17-24 GPM	12-29 GPM
# OF BLADES	2		
BLADE MATERIAL	AR400		
CUTTING CAPACITY	2"		
MACHINE REQUIREMENT	Recommended for excavators under 12,000 Lbs operating weight		
MOUNTS AVAILABLE	Kubota, Bobcat, John Deere, Takeuchi, Wain Roy, Case, CAT, Alternates available		

BRUSH CUTTER

X-TREME DUTY EXCAVATOR

MODEL	EXBC142044	EXBC202644	EXBC243044	EXBCSTAR44
WEIGHT (W/O MOUNT)	984 Lbs.	992 Lbs.	998 Lbs.	645 Lbs.
WORKING WIDTH	50"			
MOTOR	Gerotor Motor			Radial Piston Motor
CASE DRAIN	Not Required			
FLOW RANGE	14-20 GPM	20-26 GPM	24-30 GPM	12-29 GPM
# OF BLADES	2			
BLADE MATERIAL	AR400			
CUTTING CAPACITY	3"			
DEBRIS CHAINS	Optional			
MACHINE REQUIREMENT	Recommended for excavators with an operating weight of 12,000 lbs. - 20,000 lbs.			
MOUNTS AVAILABLE	Kubota, Bobcat, John Deere, Takeuchi, Wain Roy, Case, CAT, Alternates Available			


CAT
Carolina
CAT

TREE REAPER

EXCAVATOR BRUSH CUTTER







10-17 GPM TREE REAPER

WIDTHS	36"	44"
SKU	TREX1017-36	TREX1017-44
WEIGHT (W/O MOUNT)	431 Lbs.	480 Lbs.
MOTOR	Radial Piston Motor	
FLOW RANGE	10-17 GPM	
RPM	841-1430	
TIP SPEED	7924-13471 ft-min	9685-16465 ft-min
TIP SPEED	90-153 MPH	110-187 MPH
CUTTING CAPACITY	4"	5"
NUMBER OF BLADES	2 (Standard) or 3 (Adds 78 lbs.)	
BLADE MATERIAL	5/8" AR400	
MULCHING TEETH	9 Teeth Total (Only with 3 Blade Option)	
MACHINE REQUIREMENT	Recommended for excavators with an operating weight of 7,000 lbs. - 14,000 lbs.	
MOUNTS AVAILABLE	Kubota, Bobcat, John Deere, Takeuchi, Wain Roy, Case, CAT, Alternates Available	

18-25 GPM TREE REAPER

WIDTHS	36"	44"
SKU	TREX1825-36	TREX1825-44
WEIGHT (W/O MOUNT)	440 Lbs.	488 Lbs.
MOTOR	Radial Piston Motor	
FLOW RANGE	18-25 GPM	
RPM	908-1261	
TIP SPEED	8558-11886 ft-min	10460-14528 ft-min
TIP SPEED	97-135 MPH	119-165 MPH
CUTTING CAPACITY	4"	5"
NUMBER OF BLADES	2 (Standard) or 3 (Adds 78 lbs.)	
BLADE MATERIAL	5/8" AR400	
MULCHING TEETH	9 Teeth Total (Only with 3 Blade Option)	
MACHINE REQUIREMENT	Recommended for excavators with an operating weight of 7,000 lbs. - 14,000 lbs.	
MOUNTS AVAILABLE	Kubota, Bobcat, John Deere, Takeuchi, Wain Roy, Case, CAT, Alternates Available	



BRUSH CUTTER

LOW FLOW SEVERE DUTY EXCAVATOR

MODEL	SVEXCBCL
WEIGHT (W/O MOUNT)	913 Lbs
WORKING WIDTH	44"
MOTOR	Parker Bent Axis Piston Motor
CASE DRAIN	Required
FLOW RANGE	17-35 GPM
# OF BLADES	3
BLADE MATERIAL	AR400
CUTTING CAPACITY	6"
MULCHING TEETH	9
MACHINE REQUIREMENT	Recommended for excavators with an operating weight of 14,000 lbs. - 20,000 lbs.
MOUNTS AVAILABLE	Kubota, Bobcat, John Deere, Takeuchi, Wain Roy, Case, CAT, Alternates available

BRUSH CUTTER

HIGH FLOW SEVERE DUTY EXCAVATOR

MODEL	SVEXCBCH
WEIGHT (W/O MOUNT)	980 Lbs
WORKING WIDTH	44"
MOTOR	Parker Bent Axis Piston Motor
CASE DRAIN	Required
FLOW RANGE	35+ GPM
# OF BLADES	3
BLADE MATERIAL	AR400
CUTTING CAPACITY	6"
MULCHING TEETH	9
MACHINE REQUIREMENT	Recommended for excavators with an operating weight of 14,000 lbs. - 20,000 lbs.
MOUNTS AVAILABLE	Kubota, Bobcat, John Deere, Takeuchi, Wain Roy, Case, CAT, Alternates available

BOBCAT ICL3 BUCKET

MODEL	ICL3-14	ICL3-16	ICL3-20	ICL3-24
WIDTH	14"	16"	20"	24"
MOUNT	ICL3			
TEETH	Included			
DIGGING TYPE	General Digging Bucket			

BOBCAT ICL4 BUCKET

MODEL	ICL4-18	ICL4-24	ICL4-36
WIDTH	18"	24"	36"
MOUNT	ICL4		
TEETH	Included		
DIGGING TYPE	General Digging Bucket		

CID <10,000 LB. BUCKET

MODEL	EXB10K12	EXB10K18	EXB10K24	EXB10K36
WIDTH	12"	18"	24"	36"
OPERATING CAPACITY	<10,000 lbs.			
MOUNTS AVAILABLE	John Deere, Alternates available			
TEETH	Included			
DIGGING TYPE	General Digging Bucket			

CID <12,000 LB. BUCKET

MODEL	EXB12K14	EXB12K18	EXB12K24	EXB12K36
WIDTH	14"	18"	24"	36"
OPERATING CAPACITY	<12,000 lbs.			
MOUNTS AVAILABLE	John Deere, Alternates available			
TEETH	Included			
DIGGING TYPE	General Digging Bucket			

CID <16,000 LB BUCKET

MODEL	EXB16K18	EXB16K24	EXB16K36
WIDTH	18"	24"	36"
OPERATING CAPACITY	<16,000 lbs.		
MOUNTS AVAILABLE	John Deere, Alternates available		
TEETH	Included		
DIGGING TYPE	General Digging Bucket		

CONCRETE BREAKER

MODEL	CBR225	CBR500	CBR650	CBR850	CBR1000	CBR1200
ENERGY CLASS	225 ft. lb.	500 ft. lb.	650 ft. lb.	850 ft.lb.	1,000 ft. lb.	1,200 ft. lb.
OPERATING WEIGHT	408 Lbs.	618 Lbs.	716 Lbs.	1069 Lbs.	1,179 Lbs.	1,245 Lbs.
HOSE LENGTH	.5" x 90"	.5" x 100"	.5" x 100"	.75" x 100"	.75" x 100"	.75" x 100"
OPERATING PRESSURE	1,280-1,707 PSI	1,280-1,707 PSI	1,565-2,347 PSI	1,707-2,702 PSI	1,991-2,702 PSI	1,991 - 2,418 PSI
TOOL DIAMETER	1.77"	2.24"	2.75"	2.95"	3.15"	3.5"
OIL FLOW	4-8 GPM	5-10 GPM	8-17 GPM	10-29 GPM	12-37 GPM	11-25 GPM
BLOW RATE	540-1,000 BPM	600-1,490 BPM	550-1,300 BPM	380-1,100 BPM	380-1,000 BPM	370 - 900 BPM
SUITABLE CARRIER	1,600-5,000 Lbs.	6,614-14,330 Lbs.	6,614-14,330 Lbs.	9,921-17,637 Lbs.	9,921-17,637 Lbs.	12,000 - 20,000 Lbs.
MOUNTS AVAILABLE	Kubota, Bobcat, John Deere, Takeuchi, Wain Roy, Case, CAT, Alternates available					



ROOT RAKE EXCAVATOR

MODEL	EXRR36	EXRR48	EXRR72
WEIGHT	376 Lbs.	405 Lbs.	448 Lbs.
WIDTH	36"	48"	72"
TINE THICKNESS	1/2"		
TINE SPACING	4"		
OVERALL DEPTH	18"		
RAKE DEPTH	15"		
HEIGHT (NO MOUNT)	28"		
MOUNTS AVAILABLE	Kubota, Bobcat, John Deere, Takeuchi, Wain Roy, Case, CAT, Alternates available		

CONVERSIONS MINI EXCAVATOR

We offer a line of conversion plates allowing specific pin on mounts to convert to a variety of machines. After measurements are supplied, our engineers construct a custom adapter plate to match with the host machine.

EXCAVATOR TO SKID STEER CONVERSION NO HOOKUP	EXTSS
EXCAVATOR TO MT CONVERSION	EXTMT50

NEED SOME HELP? CONTACT US NCSALESTEAM@CIDATTACHMENTS.COM

BUCKET CAPACITY SHEET - Revised 3/1/2024				
ALL VOLUMES ARE APPROXIMATIONS (volumes are struck volumes i.e. not heap volumes)				
PG	**SKU #**	**PRODUCT**	**Volume (ft^3)**	**Volume (yd^3)**
4-N-1 BUCKETS				
25	MINI4N1-48	COMPACT TRACTOR 4-N-1 BUCKET, 48”	6.95	0.26
25	MINI4N1-54	COMPACT TRACTOR 4-N-1 BUCKET, 54”	7.84	0.29
25	MINI4N1-60	COMPACT TRACTOR 4-N-1 BUCKET, 60”	8.73	0.32
25	MINI4N1-66	COMPACT TRACTOR 4-N-1 BUCKET, 66”	9.62	0.36
25	MINI4N1-72	COMPACT TRACTOR 4-N-1 BUCKET, 72”	10.51	0.39
25	SD4N1-60	SD 4-N-1 BUCKET, 60”	12.17	0.45
25	SD4N1-66	SD 4-N-1 BUCKET, 66”	12.79	0.47
25	SD4N1-72	SD 4-N-1 BUCKET, 72”	13.42	0.50
25	HD4N1-63	HD 4-N-1 BUCKET, 63”	12.79	0.47
25	HD4N1-66	HD 4-N-1 BUCKET, 66”	13.42	0.50
25	HD4N1-72	HD 4-N-1 BUCKET, 72”	14.66	0.54
25	HD4N1-63T	HD 4-N-1 BUCKET W/ TEETH, 63”	12.79	0.47
25	HD4N1-66T	HD 4-N-1 BUCKET W/ TEETH, 66”	13.42	0.50
25	HD4N1-72T	HD 4-N-1 BUCKET W/ TEETH, 72”	14.66	0.54
26	X4N1-72	X-TREME 4-N-1 BUCKET, 72”	17.67	0.65
26	X4N1-78	X-TREME 4-N-1 BUCKET, 78”	19.16	0.71
26	X4N1-81	X-TREME 4-N-1 BUCKET, 81”	19.90	0.74
26	X4N1-84	X-TREME 4-N-1 BUCKET, 84”	20.65	0.76
26	X4N1-72T	X-TREME 4-N-1 W/ TEETH, 72”	17.67	0.65
26	X4N1-78T	X-TREME 4-N-1 W/ TEETH, 78”	19.16	0.71
26	X4N1-81T	X-TREME 4-N-1 W/ TEETH, 81”	19.90	0.74
26	X4N1-84T	X-TREME 4-N-1 W/ TEETH, 84”	20.65	0.76
26	SV4N1-72	Severe 4-N-1, 72"	20.48	0.76
26	SV4N1-78	Severe 4-N-1, 78"	21.63	0.80
26	SV4N1-81	Severe 4-N-1, 81"	22.50	0.83
26	SV4N1-84	Severe 4-N-1, 84"	23.36	0.87
26	SV4N1-72T	Severe 4-N-1 W/ Teeth, 72"	20.48	0.76
26	SV4N1-78T	Severe 4-N-1 W/ Teeth, 78"	21.63	0.80
26	SV4N1-81T	Severe 4-N-1 W/ Teeth, 81"	22.50	0.83
26	SV4N1-84T	Severe 4-N-1 W/ Teeth, 84"	23.36	0.87
HIGH DUMP BUCKETS				
28	HDB72	HIGH DUMP BUCKET, 72”	26.63	0.99
28	HDB84	HIGH DUMP BUCKET, 84”	31.75	1.18

28	HDB96	HIGH DUMP BUCKET, 96”	36.88	1.37
LONG BOTTOM BUCKETS				
29	LBB63	LB BUCKET, 63”	14.72	0.55
29	LBB66	LB BUCKET, 66”	15.44	0.57
29	LBB72	LB BUCKET, 72”	16.87	0.62
29	LBB78	LB BUCKET, 78”	18.30	0.68
29	LBB81	LB BUCKET, 81”	19.02	0.70
29	LBB84	LB BUCKET, 84”	19.74	0.73
29	LBB90	LB BUCKET, 90”	21.17	0.78
29	LBB96	LB BUCKET, 96”	22.60	0.84
29	LBB63T	LB BUCKET W/ TEETH, 63”	14.72	0.55
29	LBB66T	LB BUCKET W/ TEETH, 66”	15.44	0.57
29	LBB72T	LB BUCKET W/ TEETH, 72”	16.87	0.62
29	LBB78T	LB BUCKET W/ TEETH, 78”	18.30	0.68
29	LBB81T	LB BUCKET W/ TEETH, 81”	19.02	0.70
29	LBB84T	LB BUCKET W/ TEETH, 84”	19.74	0.73
29	LBB90T	LB BUCKET W/ TEETH, 90”	21.17	0.78
29	LBB96T	LB BUCKET W/ TEETH, 96”	22.60	0.84
LOW PROFILE BUCKETS				
29	LPB60	LP BUCKET, 60”	10.72	0.40
29	LPB63	LP BUCKET, 63”	11.27	0.42
29	LPB66	LP BUCKET, 66”	11.82	0.44
29	LPB72	LP BUCKET, 72”	12.92	0.48
29	LPB78	LP BUCKET, 78”	14.01	0.52
29	LPB81	LP BUCKET, 81”	14.56	0.54
29	LPB84	LP BUCKET, 84”	15.11	0.56
29	LPB90	LP BUCKET, 90”	16.21	0.60
29	LPB96	LP BUCKET, 96”	17.31	0.64
29	LPB60T	LP BUCKET W/ TEETH, 60”	10.72	0.40
29	LPB63T	LP BUCKET W/ TEETH, 63”	11.27	0.42
29	LPB66T	LP BUCKET W/ TEETH, 66”	11.82	0.44
29	LPB72T	LP BUCKET W/ TEETH, 72”	12.92	0.48
29	LPB78T	LP BUCKET W/ TEETH, 78”	14.01	0.52
29	LPB81T	LP BUCKET W/ TEETH, 81”	14.56	0.54
29	LPB84T	LP BUCKET W/ TEETH, 84”	15.11	0.56
29	LPB90T	LP BUCKET W/ TEETH, 90”	16.21	0.60
29	LPB96T	LP BUCKET W/ TEETH, 96”	17.31	0.64

ROCK BUCKETS				
36	HDRB63	HEAVY DUTY ROCK BUCKET, 63”	10.28	0.38
36	HDRB66	HEAVY DUTY ROCK BUCKET, 66”	10.78	0.40
36	HDRB72	HEAVY DUTY ROCK BUCKET, 72”	11.78	0.44
36	HDRB78	HEAVY DUTY ROCK BUCKET, 78”	12.77	0.47
36	HDRB81	HEAVY DUTY ROCK BUCKET, 81”	13.27	0.49
36	HDRB63T	HEAVY DUTY ROCK BUCKET W/ TEETH, 63”	10.28	0.38
36	HDRB66T	HEAVY DUTY ROCK BUCKET W/ TEETH, 66”	10.78	0.40
36	HDRB72T	HEAVY DUTY ROCK BUCKET W/ TEETH, 72”	11.78	0.44
36	HDRB78T	HEAVY DUTY ROCK BUCKET W/ TEETH, 78”	12.77	0.47
36	HDRB81T	HEAVY DUTY ROCK BUCKET W/ TEETH, 81”	13.27	0.49
36	XDRB66	X-TREME DUTY ROCK BUCKET, 66”		
36	XDRB72	X-TREME DUTY ROCK BUCKET, 72”		
36	XDRB78	X-TREME DUTY ROCK BUCKET, 78”		
36	XDRB81	X-TREME DUTY ROCK BUCKET, 81”		
36	XDRB84	X-TREME DUTY ROCK BUCKET, 84”		
SNOW-N-LITTER BUCKETS				
30	SNLB54	SNOW-N-LITTER BUCKET, 54”	16.75	0.62
30	SNLB60	SNOW-N-LITTER BUCKET, 60”	18.74	0.69
30	SNLB63	SNOW-N-LITTER BUCKET, 63”	19.73	0.73
30	SNLB66	SNOW-N-LITTER BUCKET, 66”	20.72	0.77
30	SNLB72	SNOW-N-LITTER BUCKET, 72”	22.71	0.84
30	SNLB78	SNOW-N-LITTER BUCKET, 78”	24.69	0.91
30	SNLB81	SNOW-N-LITTER BUCKET, 81”	25.69	0.95
30	SNLB84	SNOW-N-LITTER BUCKET, 84”	26.68	0.99
30	SNLB90	SNOW-N-LITTER BUCKET, 90”	28.66	1.06
30	SNLB96	SNOW-N-LITTER BUCKET, 96”	30.65	1.14
30	SNLB102	SNOW-N-LITTER BUCKET, 102”	32.63	1.21
30	SNLB108	SNOW-N-LITTER BUCKET, 108”	34.62	1.28
HIGH CAPACITY SNOW BUCKETS				
31	HCSB72	HIGH CAPACITY SNOW BUCKET, 72”	28.16	1.04
31	HCSB78	HIGH CAPACTY SNOW BUCKET, 78”	30.55	1.13
31	HCSB84	HIGH CAPACITY SNOW BUCKET, 84”	32.94	1.22
31	HCSB96	HIGH CAPACITY SNOW BUCKET, 96	37.73	1.40
31	HCSB102	HIGH CAPACITY SNOW BUCKET, 102”	40.12	1.49
31	HCSB108	HIGH CAPACITY SNOW BUCKET, 108”	42.51	1.57
31	HCSB120	HIGH CAPACITY SNOW BUCKET, 120”	47.30	1.75

TRACK LOADER BUCKETS				
32	TAKB72	X-TREME TRACK LOADER BUCKET, 72”	17.01	0.63
32	TAKB78	X-TREME TRACK LOADER BUCKET, 78”	18.45	0.68
32	TAKB81	X-TREME TRACK LOADER BUCKET, 81”	19.17	0.71
32	TAKB84	X-TREME TRACK LOADER BUCKET, 84”	19.88	0.74
32	TAKB90	X-TREME TRACK LOADER BUCKET, 90”	21.32	0.79
32	TAKB96	X-TREME TRACK LOADER BUCKET, 96”	22.76	0.84
32	ITAKB72	INDUSTRIAL TRACK LOADER BUCKET, 72”	17.42	0.65
32	ITAKB78	INDUSTRIAL TRACK LOADER BUCKET, 78”	18.89	0.70
32	ITAKB80	INDUSTRIAL TRACK LOADER BUCKET, 81”	19.38	0.72
32	ITAKB84	INDUSTRIAL TRACK LOADER BUCKET, 84”	20.36	0.75
32	ITAKB90	INDUSTRIAL TRACK LOADER BUCKET, 90”	21.84	0.81
32	ITAKB96	INDUSTRIAL TRACK LOADER BUCKET, 96”	23.31	0.86
TRACTOR BUCKETS				
33	CTRAC48	COMPACT TRACTOR BUCKET, 48”	11.16	0.41
33	CTRAC54	COMPACT TRACTOR BUCKET, 54”	12.60	0.47
33	CTRAC60	COMPACT TRACTOR BUCKET, 60”	14.03	0.52
33	CTRAC63	COMPACT TRACTOR BUCKET, 63”	14.75	0.55
33	CTRAC66	COMPACT TRACTOR BUCKET, 66”	15.47	0.57
33	CTRAC72	COMPACT TRACTOR BUCKET, 72”	16.91	0.63
33	TRAC63	HEAVY DUTY TRACTOR BUCKET, 63”	14.33	0.53
33	TRAC66	HEAVY DUTY TRACTOR BUCKET, 66”	15.03	0.56
33	TRAC72	HEAVY DUTY TRACTOR BUCKET, 72”	16.42	0.61
33	TRAC78	HEAVY DUTY TRACTOR BUCKET, 78”	17.82	0.66
33	TRAC81	HEAVY DUTY TRACTOR BUCKET, 81”	18.51	0.69
33	TRAC84	HEAVY DUTY TRACTOR BUCKET, 84”	19.21	0.71
34	XTRAC72	X-TREME TRACTOR BUCKET, 72”	21.40	0.79
34	XTRAC84	X-TREME TRACTOR BUCKET, 84”	25.03	0.93
34	XTRAC96	X-TREME TRACTOR BUCKET, 96”	28.67	1.06
34	XTRAC108	X-TREME TRACTOR BUCKET, 108”	32.30	1.20
TURKEY LITTER BUCKETS				
30	TLB66	TURKEY LITTER BUCKET, 66”	37.95	1.41
30	TLB78	TURKEY LITTER BUCKET, 78”	45.24	1.68
30	TLB84	TURKEY LITTER BUCKET, 84”	48.88	1.81
30	TLB96	TURKEY LITTER BUCKET, 96”	56.16	2.08
30	TLB102	TURKEY LITTER BUCKET, 108”	59.80	2.21
30	TLB108	TURKEY LITTER BUCKET, 108”	63.44	2.35
30	TLB120	TURKEY LITTER BUCKET, 120”	70.73	2.62

* Please see our website for our most current warranty information*

INSTRUCTIONS: FOR FILING CLAIMS

The warranty claim form must be filled out prior to any replacement parts being sent or warranty work being performed. We will not credit back parts that were ordered direct from our parts department. The warranty department will ship out the required parts to complete the warranty repair once claim has been reviewed and approved. We will not credit back labor without prior approval which means the warranty claim form must be filled out first. Travel will not be covered.

SKID STEER ATTACHMENTS LIMITED WARRANTY COVERAGE

CID Skid Steer Attachments that will be covered by a full 1-Year Limited Warranty
UNLESS NOTED Otherwise below:

LIMITED WARRANTY

Construction Implements Depot, Inc. products are warranted only to the original Purchaser to be free from defects in workmanship or materials for a period of (12) months from initial sale, lease or rental date.

Be sure to follow all recommended Horsepower and GPM Requirements as outlined under product specifications, in order to prevent warranty from being Void due to usage being outside designed specifications for all products.

HYDRAULIC BREAKERS

Three Year Full Warranty (wear parts excluded)

FORESTRY DISC MULCHER

For more info on our disc warranty please refer to our disc operating manual. For warranty info on all other components on the forestry disc mulcher please refer to the CID operator's manual.

NON-COVERED ITEMS

This warranty does not cover normal wear items, including but not limited to, bearings, hoses, ground engaging parts such as,teeth, blades, Blade holders, cutting edges, pilot bits, auger teeth and broom bristles.

This warranty does not cover maintenance, service or adjustments.

This warranty does not cover damage due to misuse, negligence, accidents, or improper maintenance.

This warranty does not cover damage due to improper application, installation, adjustment or setup.

This warranty does not cover improper modifications of product.

This warranty is void if any components have been disassembled, i.e. pumps, gear boxes, motors.

Specially modified attachments built by CID X-treme Attachments to meet your customer's needs shall not be warrantied by Construction Implements Depot, Inc.

This warranty does not cover replacement parts not supplied by CID, Inc

This warranty does not cover Cylinders, unless there is a leak on initial hookup.



WARRANTY STATEMENT

Our obligation under this Limited Warranty shall be solely limited to repairing or replacing any part (see non¬ covered items) free of charge that, according to our judgment, show evidence of a defect in quality of workmanship or materials for the stated (12) month warranty period. All defective parts will be routed at CID, Inc. discretion with freight or delivery charges to be prepaid. This Limited Warranty shall not be interpreted to render CID, Inc. liable for any injury or damage to persons, business or property of any kind nor expenses or losses incurred for labor, supplies, substitute machinery rental, or for any other reason. Repair or replacement parts are subject to the supply conditions at the time of repair or replacements, which may directly affect our ability to obtain material and/or replacements parts. CID, Inc. reserves the right to make improvements in design or changes in specifications at any time without incurring any obligations to owners

of previously purchased units. No one but CID, Inc. is allowed to alter, modify or enlarge this warranty nor the exclusions, limitation and reservation at any time.

PROCEDURES FOR OBTAINING WARRANTY SKID STEER SERVICE

RGA (RETURNING GOODS AUTHORIZATION) POLICY:

If repairs are required, CID must obtain a RGA number from the Manufacturer of the defective part and proof of purchase. RGA and services are rendered by CID only. Any responsibility of shipping costs on any item returned for repair is at the discretion of CID. All returned parts must have a RGA number written clearly on the outside of the package along with a Service Request Form and the defective part. No COD packages will be accepted. No package will be accepted without a RGA number written on the outside of the package. RGA numbers are only valid for 30 days from the date of issue. All replacement parts shipped out will need a PO# from the original CID customer. If the Defective part is rendered non-warranty the PO# will be invoiced for the replacement part.

TO OBTAIN A SERVICE:

Should you have any problems with your Attachments, please follow these procedures to obtain the service:

Call the Warranty Department (336) 859-2002 ext 5110. Photo's serial and model #'s of the attachment and parts in question will need to be obtained with a description of the problem.

Upon a warranted issue go to www.CIDattachments.com, click on the warranty tab and fill in the warranty claim form. CID will retain a RGA# from the manufacturer of the defective part. If all information above is fulfilled the manufacturer will issue a RGA#

A PO# is required from the original CID customer. PO#'s will only be invoiced in the event that the defective part is un-warranted.

CID will ship a replacement part with a service request form and RGA #, with the manufactures address and instructions for returning the defective part with delivery charges to be prepaid for evaluation.

Once the defective part is warranted by the manufacturer. CID will be issued a credit and the PO# will be void. If the manufacturer finds that the defective part is not warranted the PO# will be invoiced for the replacement part.

In the event that renders the attachment be returned to CID for repair, CID will make arrangements for pick up and return. Repairs will be performed by CID qualified technicians. Non-warranted issues will be discussed, and repairs will be performed upon agreement of the owner, and payment for parts, shipping, and labor will be issued.

Under this warranty, the Manufacturer will repair or replace any part which the Manufacturer determines has failed during the period of the warranty due to defects in material or workmanship. After written approval by the manufacturer, the equipment or defective part must be returned to CID.

Warranty coverage and performance is expressly conditioned upon the return of the completed registration form to CID, for Product registration please visit www.CIDattachments.com

CID reserves the right to make improvements and changes in specifications without notice or obligation to modify previously sold units. The Owner's Manual describes the proper assembly procedures for your implement and furnishes operating and maintenance recommendations to help you obtain long and satisfactory service.


PURCHASER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY, OTHER DEFECT, OR CONDUCT GIVING RISE TO LIABILITY SHALL BE THE REPAIR OR REPLACEMENT OF THE PRODUCT SOLD, AND THE MANUFACTURER UNDER NO CIRCUMSTANCES SHALL BE LIABLE FOR ECONOMIC LOSS OR INCIDENTAL OR CONSEQUENTIAL DAMAGES. THE MANUFACTURER DISCLAIMS ALL IMPLIED WARRANTIES, INCLUDING THE WARRANTY OF MERCHANTABILITY AND FITNESS FOR PURPOSE.

Purchaser and CID hereby (a) submit to the non-exclusive jurisdiction of the courts of competent jurisdiction in Meigs County, Tennessee, and the United State District Court for the Eastern District of Tennessee for resolution of any dispute concerning this Limited Warranty or the rights or obligations of Purchaser and/or CID; (b) agree that any litigation commenced in Tennessee in connection with this Limited Warranty shall be venued in either the Meigs County, Tennessee District Court, or the United States District Court, Eastern District of Tennessee, Southern Division, and © waive any objection it may have as to any such action or proceeding brought in such court that such court is an inconvenient forum. Nothing herein shall limit the right of Purchaser or CID (or the right of any permitted successor or assign of either) to bring proceedings against the other in the courts of any other jurisdiction wherein any assets of such other party may be located.

Rev: 2/15/2023

Custom Pin On Diagram

_____ A = boom to cylinder pin (center to center dimension)
_____ B = cylinder to cylinder (inside dimension)
_____ C = cylinder to cylinder (outside dimension)
_____ D = boom to boom (inside dimension)
_____ E = boom to boom (outside dimension)
_____ F = top pin diameter
_____ G = bottom pin diameter

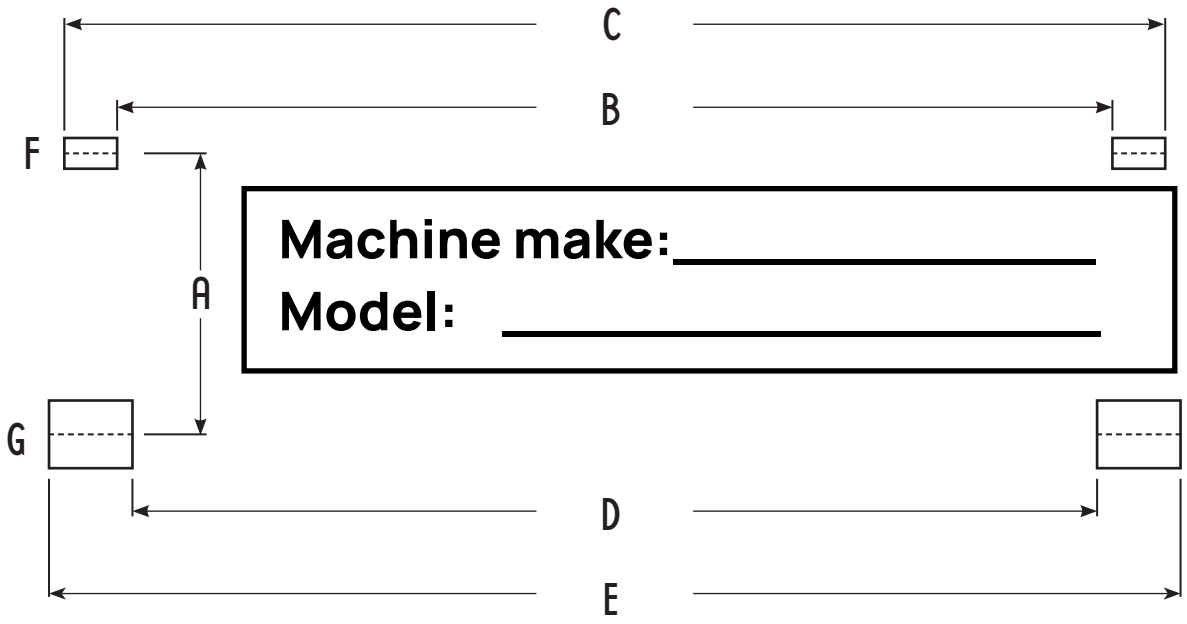

Machine make: _____
Model: _____

Dealer Name:

_____

My Name:

_____

Cell Number/Email:

_____

WANT A QUICKER RESPONSE?

SCAN QR, AND SUBMIT INFO!

YOU'LL RECEIVE A CONFIRMATION EMAIL.

Specs:

A - (Pin to Pin Centers) : _____

B* - (Stick Width) : _____

C* - (Link Pin Width) : _____

D - (Stick Pin Diameter) : _____

E - (Link Pin Diameter) : _____

Mount Inofrmation:


Excavator Make : _____


Excavator Model : _____

Pin Grabber (YES/NO) : _____

Pin Grabber Make : _____

Pin grabber Model : _____

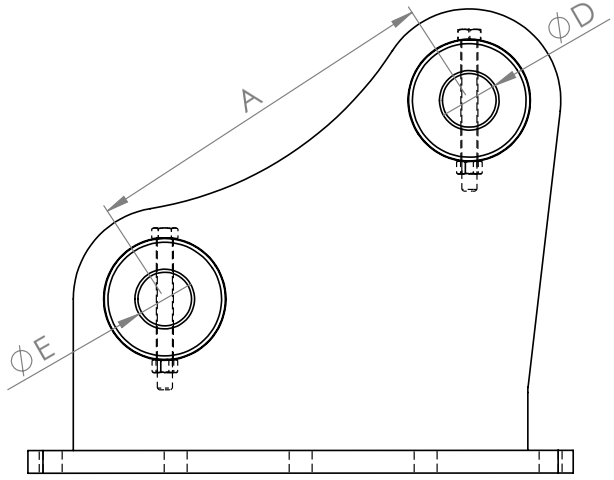

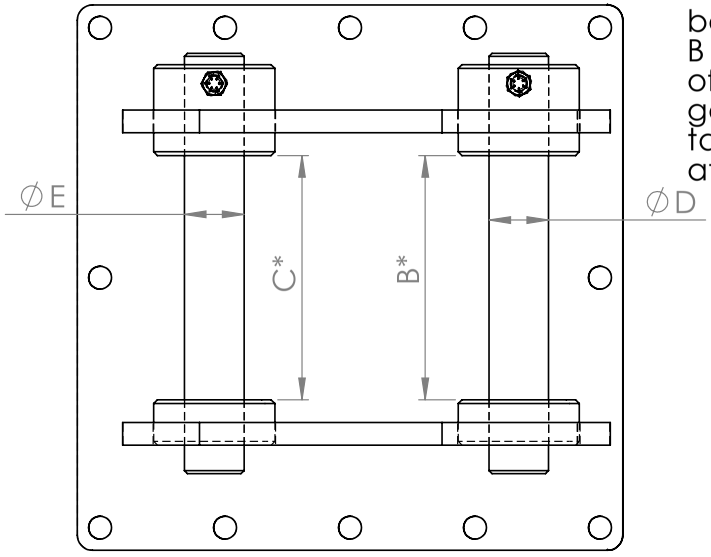

**if a pin grabber is being used, take B and C from portion of pin grabber that goes into attachment, take A, D, E from attachment side


* - Use Machine/ Pin Grabber Side for measurement (**DO NOT MEASURE THE MOUNT ON THE ATTACHMENT for Pin on Mounts**), we add a tolerance to the measurements to ensure fitment, attachment side could compound and create excessive gaps

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS: .X ± .1, .XX ± .01, .XXX ± .005 ANGULAR: ± .5		NAME	DATE	MODEL PROPERTIES
	DRAWN BY	bble	4/28/2025	MATERIAL:
	CHECKED BY	dsoe		WEIGHT:
	ENGINEER APPROVAL			COST PER UNIT:
	MANAGEMENT APPROVAL			QUANTITY:
	COMMENTS			
REMOVE ALL BURRS				
DO NOT SCALE				

EXCM-Generic-PO

CID ATTACHMENTS

SIZE: A	DWG NO	PART #
SCALE:	REVISION	SHEET: 1 OF 1



WIRE COLOR CODES
FOR ELECTRICAL HARNESS PINOUTS

ASV — 8 PIN
A=BLACK (GROUND)
B=ORANGE
G=YELLOW
C=BLUE
D=RED

GEHL — 14 PIN
B=BLACK
C=ORANGE
D=YELLOW
E=RED
F=BLUE

NEW HOLLAND — 14 PIN
B=BLACK
C=ORANGE (LEFT)
D=YELLOW (RIGHT)
E=BLUE (DOWN)
F=RED (UP)

TAKEUCHI — 14 PIN
B=BLACK
E=YELLOW
F=ORANGE
C=RED
D=BLUE

Kubota — 14 PIN
B=BLACK (GOUND)
C=RED
D=BLUE
G=YELLOW
H=ORANGE
E=MOMENTARY HOT
F=MOMENTARY HOT

Bobcat — S MODELS 14 PIN
B=BLACK
E=ORANGE
F=YELLOW
G=BLUE
H=RED

CAT — D MODELS 14 PIN
B=BLACK
F=BLUE
E=RED
J=MOMENTARY HOT
K=MOMENTARY HOT
C=YELLOW
D=ORANGE


CASE — 14 PIN
B=BLACK
C=ORANGE
D=YELLOW
E=BLUE
F=RED

KIOTI — 14 PIN
B=BLACK (GROUND)
C=RED (UP)
D=BLUE (DOWN)
G=ORANGE (LEFT)
H=YELLOW (RIGHT)
E=MOMENTARY HOT
F=MOMENTARY HOT

JCB — 14 PIN
B=BLACK
C=RED
D=BLUE
E=YELLOW
F=ORANGE

ASV — 14 PIN
C=RED
D=BLUE
E=ORANGE
F=YELLOW
B=BLACK


JOHN DEERE — G OR D MODELS 14 PIN
A=BLACK
C=RED
D=BLUE
E=YELLOW
G=ORANGE

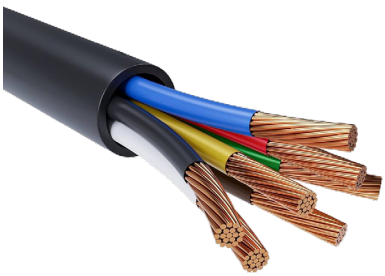

PINS


Quick Reference Guide

FOR WIRE HARNESS



7 PIN

7 PINS ARE PRE-ASSEMBLED



FRONT

8 PIN



BACK



FRONT

14 PIN



BACK

SWING BOOM / POWER RAKE / SNOW BLOWER

PIN END





ATTACHMENT END

6 WD / SWING ARM BACKHOE / TREE SHEAR / ANGLE BROOM / MULTI-PURPOSE POWER RAKE

PIN END






ATTACHMENT END

HARNESS KITS

Reference Guide

SWING BOOM CUTTER | SNOW BLOWER | X-TREME POWER RAKE

UNIVERSAL (machine side)



CID8002

+


UNIVERSAL (attachment side)



CID3042

=

UNIVERSAL (whole thing)



CID3041

7 PIN HARNESS KIT




CID8010

8 PIN HARNESS KIT



CID8008

14 PIN HARNESS KIT



CID8005


Don't forget to secure it



with ZIP ties!

DOZER BLADES | TREE SHEAR | ANGLE BROOM | SWING ARM BACKHOE | MULTI-PURPOSE POWER RAKE

7 PIN HARNESS KIT



CID8091

8 PIN HARNESS KIT



CID8007

14 PIN HARNESS KIT



CID8009

UNIVERSAL



CID3040

Standard Duty Brush Cutters

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	# BLADES	CASE DRAIN REQUIRED?
SBC60	STANDARD BRUSH CUTTER 60"	14-20	3"	2	No
SBC72	STANDARD BRUSH CUTTER 72"	14-20	3"	2	No
SOFBC60	STANDARD OPEN FRONT BRUSH CUTTER 60"	14-20	3"	2	No
SOFBC72	STANDARD OPEN FRONT BRUSH CUTTER 72"	14-20	3"	2	No

Heavy Duty Brush Cutters

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	# BLADES	CASE DRAIN REQUIRED?
HDBCNS60-2	HEAVY DUTY BRUSH CUTTER, 60", 2 BLADE	14-20	4"	2	No
HDBCNS60-3	HEAVY DUTY BRUSH CUTTER, 60", 3 BLADE	14-20	4"	3	No
HDBCNS72-2	HEAVY DUTY BRUSH CUTTER, 72", 2 BLADE	14-20	4"	2	No
HDBCNS72-3	HEAVY DUTY BRUSH CUTTER, 72", 3 BLADE	14-20	4"	3	No
HDBCNS78-2	HEAVY DUTY BRUSH CUTTER, 78", 2 BLADE	14-20	4"	2	No
HDBCNS78-3	HEAVY DUTY BRUSH CUTTER, 78", 3 BLADE	14-20	4"	3	No

X-Treme Duty Brush Cutters

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	# BLADES	CASE DRAIN REQUIRED?
XBC60LF	X-TREME 14-20 GPM BRUSH CUTTER, 60"	14-20	6"	3	No
XBC60LFMT	X-TREME 14-20 GPM BRUSH CUTTER, 60", MULCHING TEETH	14-20	6"	3	No
XBC72LF	X-TREME 14-20 GPM BRUSH CUTTER, 72"	14-20	6"	3	No
XBC72LFMT	X-TREME 14-20 GPM BRUSH CUTTER, 72", MULCHING TEETH	14-20	6"	3	No
XBC78LF	X-TREME 14-20 GPM BRUSH CUTTER, 78"	14-20	6"	3	No
XBC78LFMT	X-TREME 14-20 GPM BRUSH CUTTER, 78" MULCHING TEETH	14-20	6"	3	No
XBC84LF	X-TREME 14-20 GPM BRUSH CUTTER, 84"	14-20	6"	3	No
XBC84LFMT	X-TREME 14-20 GPM BRUSH CUTTER, 84" MULCHING TEETH	14-20	6"	3	No
XBC60MF	X-TREME 20-30 GPM BRUSH CUTTER, 60"	20-30	6"	3	No
XBC60MFMT	X-TREME 20-30 GPM BRUSH CUTTER, 60" MULCHING TEETH	20-30	6"	3	No
XBC72MF	X-TREME 20-30 GPM BRUSH CUTTER, 72"	20-30	6"	3	No
XBC72MFMT	X-TREME 20-30 GPM BRUSH CUTTER, 72" MULCHING TEETH	20-30	6"	3	No
XBC78MF	X-TREME 20-30 GPM BRUSH CUTTER, 78"	20-30	6"	3	No
XBC78MFMT	X-TREME 20-30 GPM BRUSH CUTTER, 78" MULCHING TEETH	20-30	6"	3	No
XBC84MF	X-TREME 20-30 GPM BRUSH CUTTER, 84"	20-30	6"	3	No
XBC84MFMT	X-TREME 20-30 GPM BRUSH CUTTER, 84" MULCHING TEETH	20-30	6"	3	No
XBC162660	X-TREME 16-26 GPM BRUSH CUTTER,60"	16-26	6"	3	No
XBC162660	X-TREME 16-26 GPM BRUSH CUTTER,60" MULCHING TEETH	16-26	6"	3	No
XBC162672	X-TREME 16-26 GPM BRUSH CUTTER,72"	16-26	6"	3	No
XBC162672	X-TREME 16-26 GPM BRUSH CUTTER,72" MULCHING TEETH	16-26	6"	3	No
XBC162678	X-TREME 16-26 GPM BRUSH CUTTER,78"	16-26	6"	3	No
XBC162678	X-TREME 16-26 GPM BRUSH CUTTER,78" MULCHING TEETH	16-26	6"	3	No
XBC162684	X-TREME 16-26 GPM BRUSH CUTTER,84"	16-26	6"	3	No
XBC162684	X-TREME 16-26 GPM BRUSH CUTTER,84" MULCHING TEETH	16-26	6"	3	No

X-Treme Duty Piston Cutters

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	# BLADES	CASE DRAIN REQUIRED?
XBC173060	X-TREME 17-30 GPM BRUSH CUTTER, 60"	17-30	6"	3	Yes
XBC173060MT	X-TREME 17-30 GPM BRUSH CUTTER, 60" MULCHING TEETH	17-30	7"	3	Yes
XBC173072	X-TREME 17-30 GPM BRUSH CUTTER, 72"	17-30	7"	3	Yes
XBC173072MT	X-TREME 17-30 GPM BRUSH CUTTER, 72" MULCHING TEETH	17-30	7"	3	Yes
XBC173078	X-TREME 17-30 GPM BRUSH CUTTER, 78"	17-30	7"	3	Yes
XBC173078MT	X-TREME 17-30 GPM BRUSH CUTTER, 78" MULCHING TEETH	17-30	7"	3	Yes
XBC173084	X-TREME 17-30 GPM BRUSH CUTTER, 84"	17-30	7"	3	Yes

XBC173084MT	X-TREME 17-30 GPM BRUSH CUTTER, 84" MULCHING TEETH	17-30	7"	3	Yes
XBC273560	X-TREME 27-35 GPM BRUSH CUTTER, 60"	27-35	7"	3	Yes
XBC273560MT	X-TREME 27-35 GPM BRUSH CUTTER, 60" MULCHING TEETH	27-35	7"	3	Yes

X-Treme Duty Brush Cutters (con't)

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	# BLADES	CASE DRAIN REQUIRED?
XBC273572	X-TREME 27-35 GPM BRUSH CUTTER, 72"	27-35	7"	3	Yes
XBC273572MT	X-TREME 27-35 GPM BRUSH CUTTER, 72" MULCHING TEETH	27-35	7"	3	Yes
XBC273578	X-TREME 27-35 GPM BRUSH CUTTER, 78"	27-35	7"	3	Yes
XBC273578MT	X-TREME 27-35 GPM BRUSH CUTTER, 78" MULCHING TEETH	27-35	7"	3	Yes
XBC273584	X-TREME 27-35 GPM BRUSH CUTTER, 84"	27-35	7"	3	Yes
XBC273584MT	X-TREME 27-35 GPM BRUSH CUTTER, 84" MULCHING TEETH	27-35	7"	3	Yes
XBC304860	X-TREME 30-48 GPM BRUSH CUTTER, 60"	30-48	7"	3	Yes
XBC304860MT	X-TREME 30-48 GPM BRUSH CUTTER, 60" MULCHING TEETH	30-48	7"	3	Yes
XBC304872	X-TREME 30-48 GPM BRUSH CUTTER, 72"	30-48	7"	3	Yes
XBC304872MT	X-TREME 30-48 GPM BRUSH CUTTER, 72" MULCHING TEETH	30-48	7"	3	Yes
XBC304878	X-TREME 30-48 GPM BRUSH CUTTER, 78"	30-48	7"	3	Yes
XBC304878MT	X-TREME 30-48 GPM BRUSH CUTTER, 78" MULCHING TEETH	30-48	7"	3	Yes
XBC304884	X-TREME 30-48 GPM BRUSH CUTTER, 84"	30-48	7"	3	Yes
XBC304884MT	X-TREME 30-48 GPM BRUSH CUTTER, 84" MULCHING TEETH	30-48	7"	3	Yes

X-Treme Tree Reaper

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	# BLADES	CASE DRAIN REQUIRED?
TRBC162660	X-TREME TREE REAPER, 60", 16-26 GPM	16-26	5"	3	No
TRBC162660MT	X-TREME TREE REAPER, 60", 16-26 GPM MULCHING TEETH	16-26	5"	3	No
TRBC162672	X-TREME TREE REAPER, 72", 16-26 GPM	16-26	5"	3	No
TRBC162672MT	X-TREME TREE REAPER, 72", 16-26 GPM MULCHING TEETH	16-26	5"	3	No
TRBC162678	X-TREME TREE REAPER, 78", 16-26 GPM	16-26	5"	3	No
TRBC162678MT	X-TREME TREE REAPER, 78", 16-26 GPM MULCHING TEETH	16-26	7"	3	No
TRBC173060	X-TREME TREE REAPER, 60", 17-30 GPM	17-30	7"	3	Yes
TRBC173060MT	X-TREME TREE REAPER, 60", 17-30 GPM MULCHING TEETH	17-30	7"	3	Yes
TRBC173072	X-TREME TREE REAPER, 72", 17-30 GPM	17-30	7"	3	Yes
TRBC173072MT	X-TREME TREE REAPER, 72", 17-30 GPM MULCHING TEETH	17-30	7"	3	Yes
TRBC173078	X-TREME TREE REAPER, 78", 17-30 GPM	17-30	7"	3	Yes
TRBC173078MT	X-TREME TREE REAPER, 78", 17-30 GPM MULCHING TEETH	17-30	7"	3	Yes
TRBC304872MT	X-TREME TREE REAPER, 72" HF, 30-48 GPM MULCHING TEETH	30-48	7"	3	Yes
TRBC304878MT	X-TREME TREE REAPER, 78" HF, 30-48 GPM MULCHING TEETH	30-48	7"	3	Yes

Severe Duty Brush Cutters

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	# BLADES	CASE DRAIN REQUIRED?
SDBAPC72L	SEVERE DUTY BENT AXIS PISTON CUTTER, 72", 20-30 GPM	20-30	10"	4	Yes
SDBAPC78L	SEVERE DUTY BENT AXIS PISTON CUTTER, 78", 20-30 GPM	20-30	10"	4	Yes
SDBAPC72H	SEVERE DUTY BENT AXIS PISTON CUTTER, 72", 30-50 GPM	20-30	10"	4	Yes
SDBAPC78H	SEVERE DUTY BENT AXIS PISTON CUTTER, 78", 30-50 GPM	20-30	10"	4	Yes

Swing Boom Cutters

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	# BLADES	CASE DRAIN REQUIRED?
SBCNS	SWING BOOM BRUSH CUTTER PISTON MOTOR, 17-30 GPM	17-30	4"	2	Yes
SBC	SWING BOOM BRUSH CUTTER, 14-20 GPM	14-20	3"	2	No
SBC	SWING BOOM BRUSH CUTTER, 16-26 GPM	16-26	3"	2	No

Excavator Cutters

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	# BLADES	CASE DRAIN REQUIRED?
SVEXCBCL	SEVERE EXCAVATOR CUTTER, 17-35 GPM	17-35	6"	3	Yes
SVEXCBCH	SEVERE EXCAVATOR CUTTER, 35+ GPM	35+	6"	3	Yes
EXBC142044	XTREME EXCAVATOR CUTTER 14-20 GPM	14-20	3"	2	No
EXBC202644	XTREME EXCAVATOR CUTTER 20-26 GPM	20-26	3"	2	No
EXBC243044	XTREME EXCAVATOR CUTTER 24-30 GPM	24-30	3"	2	No
EXBCSTAR44	XTREME EXCAVATOR CUTTER STAR MOTOR, 12-29 GPM	12-29	3"	2	No
SDEXBC91542	STANDARD DUTY EXCAVATOR CUTTER, 12-17 GPM	12-17	2"	2	No
SDEXBC142042	STANDARD DUTY EXCAVATOR CUTTER, 17-24 GPM	17-24	2"	2	No
SDEXBCSTAR44	STANDARD EXCAVATOR CUTTER STAR MOTOR, 12-29 GPM	12-29	2"	2	No

Forestry Disc Mulchers

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	BEAVER STYLE TEETH	CASE DRAIN REQUIRED?
FDM44	FORESTRY DISC MULCHER, 100CC 20-30 GPM	20-30	8"	34 total	No
FDM44	FORESTRY DISC MULCHER, 150CC 30-44 GPM	30-44	8"	34 total	No
FDM60	FORESTRY DISC MULCHER, 150CC 32-44 GPM	32-44	14"	49 total	Yes
FDM60	FORESTRY DISC MULCHER, 200CC 45-60 GPM	45-60	14"	49 total	Yes

Mini-Skid Steer

MODEL	DESCRIPTION	HYD FLOW (GPM)	CUT CAPACITY (dia)	# BLADES	CASE DRAIN REQUIRED?
DBC	44" BRUSH CUTTER FOR DINGO	15-Oct	3"	2	No
MTBC	44" BRUSH CUTTER FOR MT50	10-15	3"	2	No

CLASS I FORKS and FRAMES

*For shipping weights and pricing please refer to pricing page.

MODEL	DESCRIPTION	CAPACITY (LBS)	TINE WIDTH (in)	WIDTH (in)	AVAILABLE Tine Length (in)	AVAILABLE MOUNTS
SCTFRAME	SUBCOMPACT TRACTOR	1000		45	35,42	DEERE, UNIVERSAL
CTFRAME	COMPACT TRACTOR	2000	3	45	42,48	DEERE, UNIVERSAL, YAMMAR, KUBOTA

CLASS II FORKS and FRAMES

MODEL	DESCRIPTION	CAPACITY (LBS)	TINE WIDTH (in)	WIDTH (in)	AVAILABLE Tine Length (in)	AVAILABLE MOUNTS
SDFRAME	STANDARD DUTY	3000	4	45	42, 48	DEERE, UNIVERSAL, EURO
HDFRAME	HEAVY DUTY	4000	4	45	42,48	DEERE, UNIVERSAL, EURO
HDFF5500	HEAVY DUTY, 5500 LB	5500	4	45	42,48,60,72	DEERE, UNIVERSAL, EURO
HHDFF	HYDRAULIC HD	4000	4	45	42,48	DEERE, UNIVERSAL, EURO
HHDFF5500	HYDRAULIC HD, 5500 LB	5500	4	45	42,48,60,72	DEERE, UNIVERSAL, EURO, BUSHHOG
WTFRAME	WALK-THRU	4000	4	45	42,48	DEERE, UNIVERSAL, EURO
WTFF5500	WALK-THRU, 5500 LB	5500	4	45	42,48,60,72	DEERE, UNIVERSAL, EURO
WTHHDFF	WALK-THRU HYDRAULIC HD	4000	4	45	42,48	DEERE, UNIVERSAL, EURO
HWTFF5500	HYDRAULIC WALK-THRU, 5500	5500	4	45	42,48,60,72	DEERE, UNIVERSAL, EURO
JD67HDFF5500	JD 600-700 5500	5500	4	55	42,48,60,72	DEERE
FG	FORK GRAPPLE, CLASS II	4000	4	45	48,60,72	DEERE, UNIVERSAL, EURO
FG5500	FORK GRAPPLE, CLASS II 5500	5500	4	45	48,60,72	DEERE, UNIVERSAL, EURO

CLASS III FORKS and FRAMES

MODEL	DESCRIPTION	CAPACITY (LBS)	TINE WIDTH (in)	WIDTH (in)	AVAILABLE Tine Length (in)	AVAILABLE MOUNTS
XDFRAME	X-TREME DUTY	8500	5	45	48,60,72,96	DEERE, UNIVERSAL, EURO, Tele, Verse, JCB
HXDFF	HYDRAULIC XD	8500	5	45	48,60,72,96	DEERE, UNIVERSAL, EURO, Tele, Verse, JCB
C5FG	FORK GRAPPLE	8500	5	45	48,60,72,96	DEERE, UNIVERSAL, EURO, Tele, Verse, JCB
C5MG	X-TREME MAT GRAPPLE	8500	5	45	48,60,72,96	DEERE, UNIVERSAL, EURO, Tele, Verse, JCB

NOTES

MADE IN THE USA
WITH U.S. & IMPORTED PARTS