




MIX & GO CONCRETE MIXERS



The BMX-100, 250, 450, and 600 mixers make up the line of the Mix & Go Skid Steer Concrete Mixers. Capacities range between 3.34 cu. ft. and 21 cu. ft. allowing them to fit a variety of machine sizes and operations. All models can handle aggregate of up to 1.25" in diameter. Each size mixer seamlessly scoops, mixes, and dispenses a variety of cementitious materials.

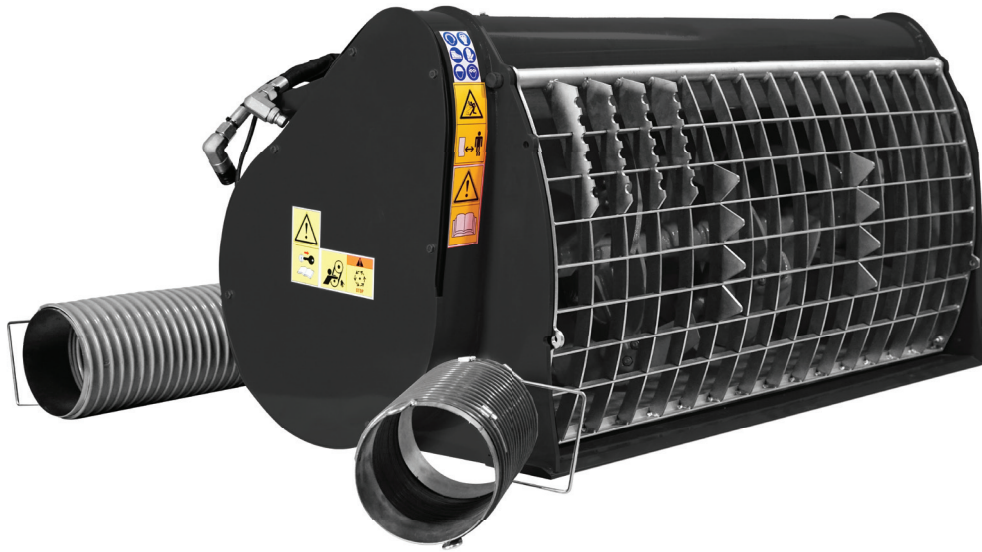

	BMX-100	BMX-250	BMX-450	BMX-600
CAPACITY	3.53 Cubic Feet / 26.4 Gallons	8.82 Cubic Feet / 66 Gallons	15.89 Cubic Feet / 118.9 Gallons	21.18 Cubic Feet / 158.5 Gallons
CENTER DISCHARGE CHUTE	N/A	Hydraulically Controlled 8" Diameter Chute	Hydraulically Controlled 8" Diameter Chute	Hydraulically Controlled 8" Diameter Chute
DRIVE SYSTEM	Gear Drive	Chain Driven	Chain Driven	Chain Driven
ELECTRICAL	N/A	12V Switched Solenoid	12V Switched Solenoid	12V Switched Solenoid
FLOW RANGE	11-16 GPM	11-22 GPM	11-22 GPM	11-22 GPM
MAX PRESSURE	N/A	3,500 PSI	3,500 PSI	3,500 PSI
PADDLE MATERIAL	Hardox 400	Hardox 400	Hardox 400	Hardox 400
SIDE DISCHARGE CHUTE	Manual Lever	Manual Lever	Manual Lever	Manual Lever
WEIGHT-EMPTY	419 lbs.	838 lbs.	1,009 lbs.	1,389 lbs.
WEIGHT-FULL LOAD	816 lbs.	2,161 lbs.	3,362 lbs.	4,564 lbs.
WIDTH	41"	58"	64"	81"

