



Time to
LEVEL THE PLAYING FIELD

IronCraft's dual-edge graders can be used to maintain gravel driveways, level a garden plot, and smooth dirt areas including horse arenas and barn floors. They feature replaceable skid shoes, reversible blades, adjustable blade height and shanks.



Forging Ahead

NOTES:

Made in the U.S.A.
WITH U.S. & IMPORTED PARTS



IRONCRAFTUSA.COM | (423) 405-5150



3600 & 3700 SERIES

HEAVY-DUTY
DUAL EDGE GRADERS

3600 & 3700 SERIES

STANDARD-DUTY
DUAL EDGE GRADERS

Made in the U.S.A.

WITH U.S. & IMPORTED PARTS




PRODUCT HIGHLIGHTS

RECOMMENDED FOR 25 – 80 HORSEPOWER TRACTORS

CAT 1 & CAT 2 HITCH (3700)
QUICK HITCH COMPATIBLE

EASY-TO-ADJUST SHANKS

REPLACEABLE SKID SHOES

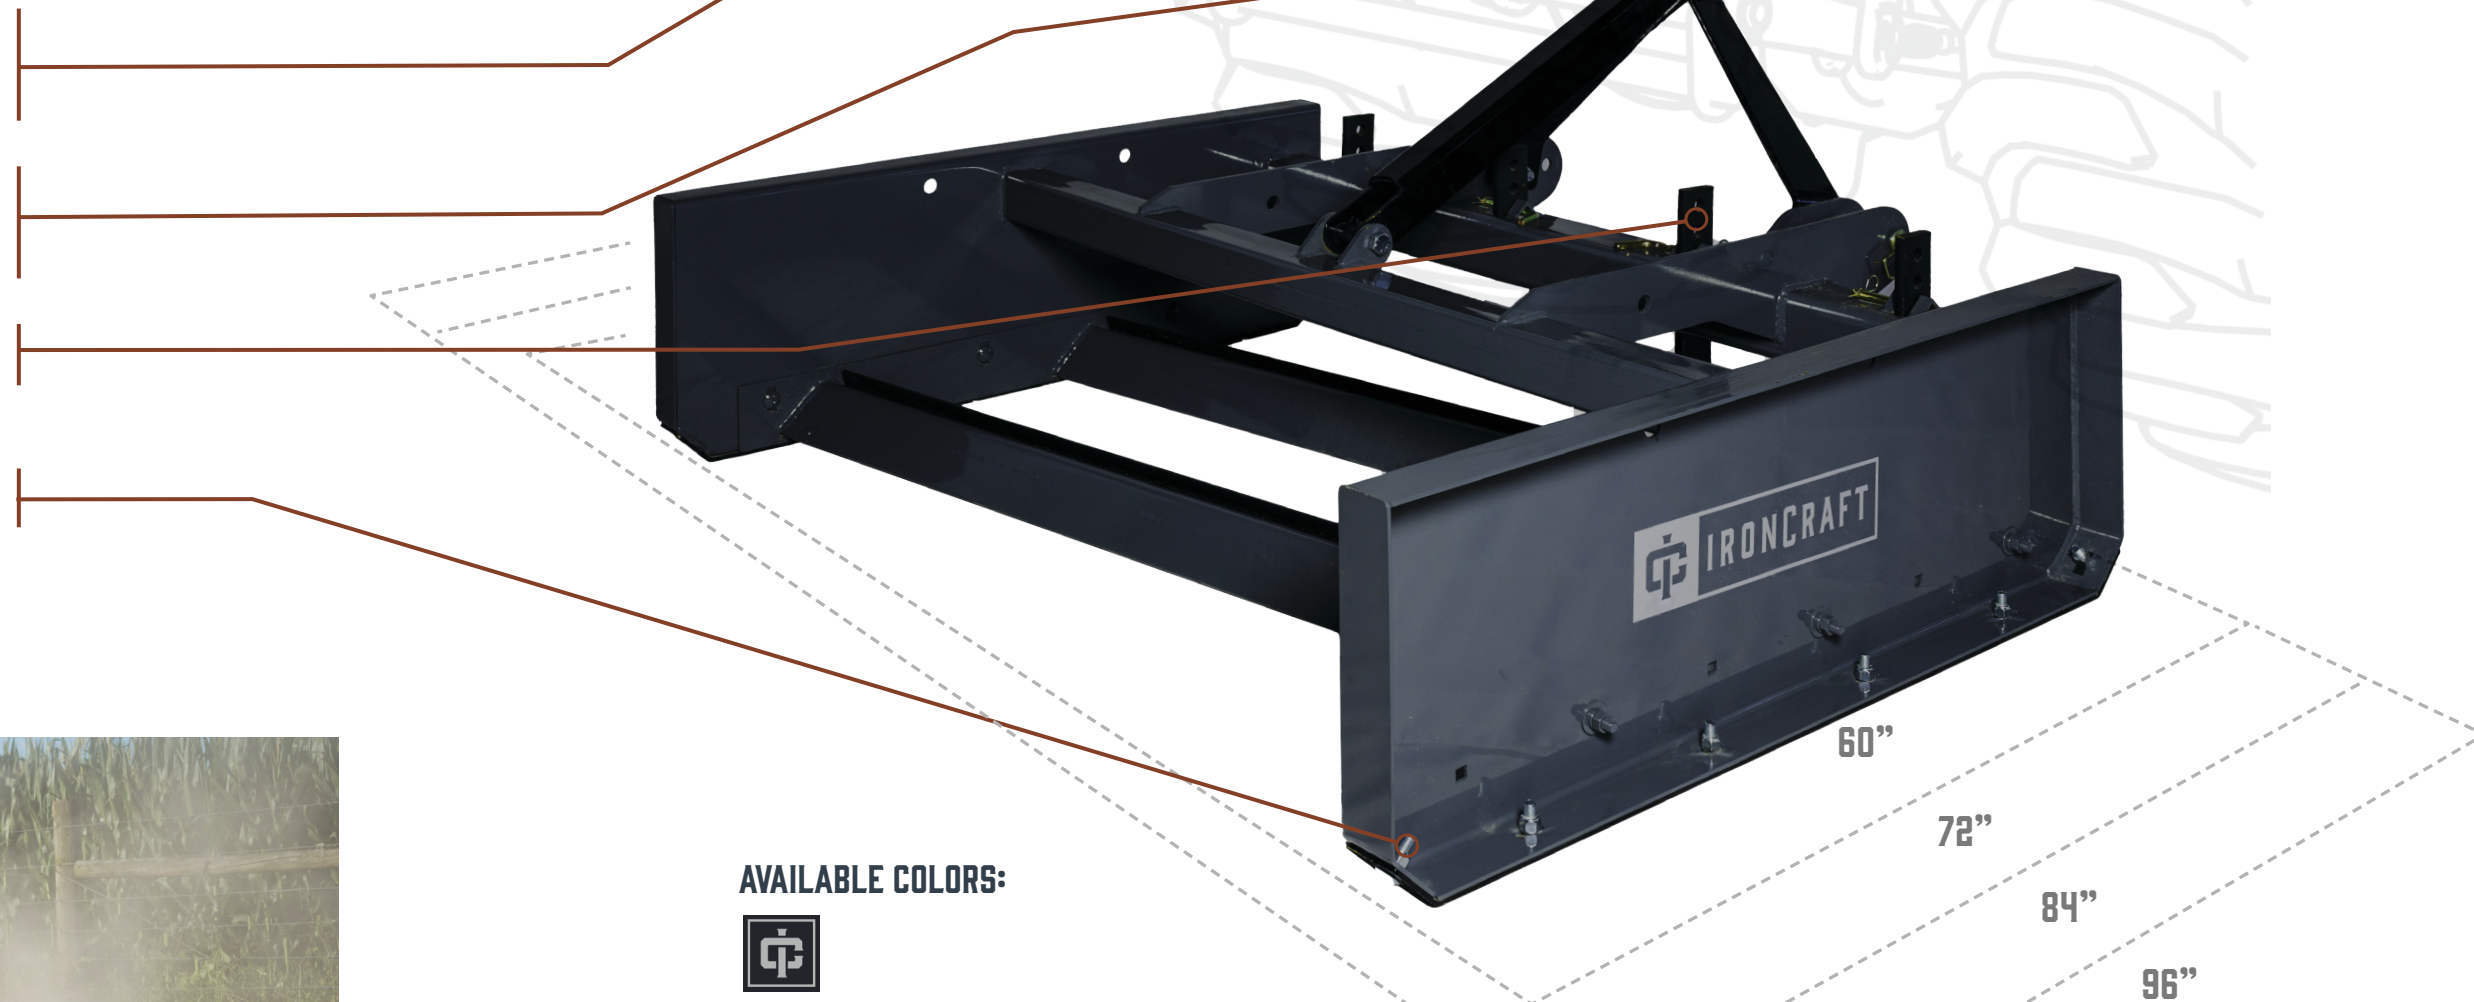

AVAILABLE COLORS:



	3605	3606	3707	3708
HORSEPOWER REQUIRED	25 - 55 HP	35 - 55 HP	40 - 80 HP	50 - 80 HP
WORKING WIDTH	60"	72"	84"	96"
OVERALL WIDTH	65-5/8"	77-5/8"	89-5/8"	101-5/8"
OVERALL LENGTH	52-7/8"		58-1/2"	
OVERALL HEIGHT	33-3/4"			
WEIGHT W/ SHANKS	490 LBS	545 LBS	700 LBS	740 LBS
NUMBER OF SHANKS	4	5	6	
A-FRAME MATERIAL	3/8"			
SIDE PANEL THICKNESS	3/16"			
SIDE PANEL HEIGHT	15-11/16"			
SIDE PANEL LENGTH	46-3/8"		52-3/8"	
LOWER DRAFT LINK ATTACH	CLEVIS TYPE			
HITCH	CAT 1		CAT 1 & 2	
QH COMPATIBLE	YES		YES	
SCARIFIER SUPPORT TUBE	4" X 4" X 1/4"			
REAR BEAM CONSTRUCTION	3" X 3" X 3/16"			
SKID SHOES (STANDARD)	REPLACEABLE			
SKID SHOE DIMENSION	3/16" X 2-3/4" X 47-3/8"			
SHANK CONSTRUCTION	3 POSITION, HEAT TREATED W/ DIMPLED ON HARDENED TIPS			
SHANK ADJUSTMENT	1-1/2" AT GRADE LEVEL & 3" BELOW GRADE LEVEL			
CUTTING EDGE	REVERSABLE 3/8" X 6"			
CUTTING EDGE PLACEMENT	TWO GRADING BLADES W/ 18-1/4" SPACING POSITIONED PARALLEL ON A 10 DEGREE GRADING ANGLE		TWO GRADING BLADES W/ 19-7/8" SPACING POSITIONED PARALLEL ON A 10 DEGREE GRADING ANGLE	
CUTTING EDGE ADJUSTMENT	VERTICAL ADJUSTMENT FROM LEVEL GRADE TO 1" BELOW GRADE			
WARRANTY	1 YEAR		1 YEAR	

(423) 405-5150

IRONCRAFTUSA.COM

IRONCRAFT
DUAL EDGE



WATCH IT IN
ACTION