



NOTES:		



IRONCRAFTUSA.COM | (423) 405-5150



2515 SERIES 15' FLEX-WING CUTTER

PRODUCT HIGHLIGHTS


RECOMMENDED FOR 50 PTO HORSEPOWER MINIMUM TRACTORS

190 HP OUTBOARD GEARBOX RATING & 5 YEAR LIMITED WARRANTY

2-1/2" MATERIAL CUT CAPACITY

22° DOWN TO 88° UP WING FLEX

WATCH IT IN ACTION

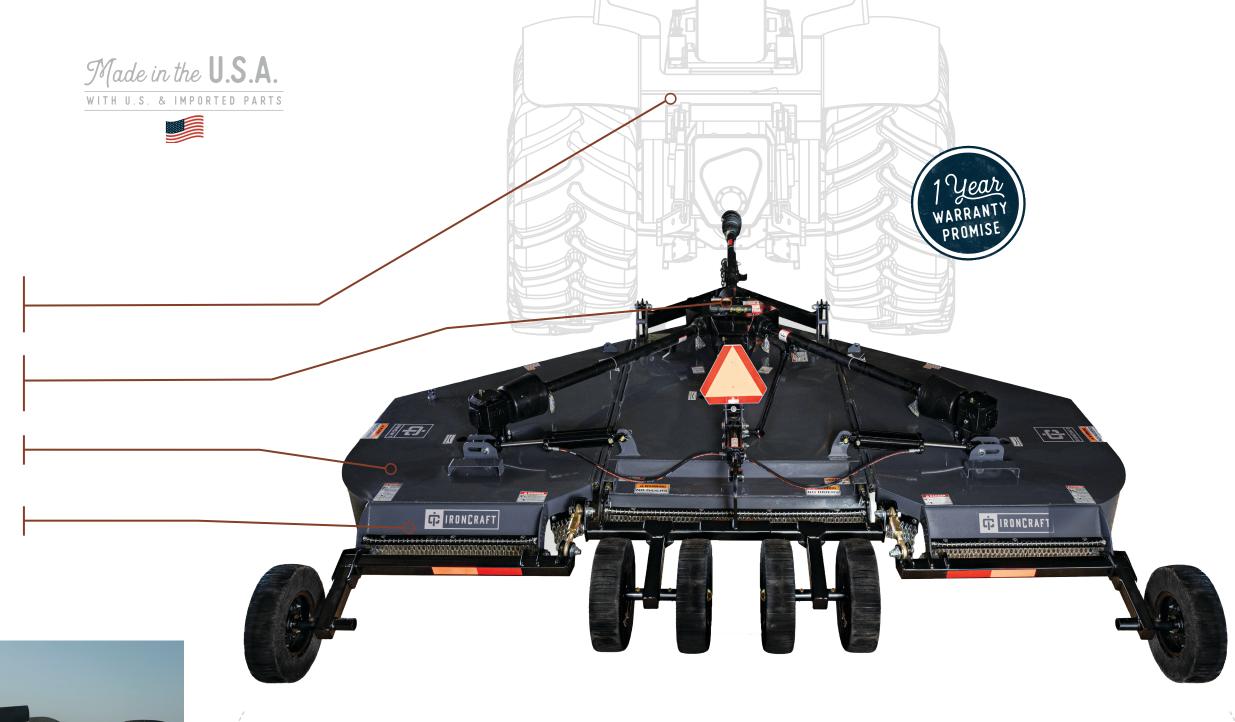

15' CHTTING WIDTH

IRONGRAFI

(423) 405-5150

IRONCRAFTUSA.COM



	2515		
O HORSEPOWER	50 PTO HP MINIMUM		
CUTTING WIDTH	180"		
OVERALL WIDTH	188"		
VERALL LENGTH W/WHEEL	186"		
ANSPORT WIDTH	90"		
NSPORT HEIGHT	83" - 87"		
TTING CAPACITY	UP TO 2-1/2"		
CUTTING HEIGHT	2" TO 15"		
APPROXIMATE WEIGHT	4500 LBS W/6-26" LAMINATED TIRES		
APPROXIMATE TONGUE WEIGHT	1500 LBS		
LADE TIP SPEED	17,135 FPM (540 OR 1000 RPM)		
BLADES	1/2" X 4" UPLIFT		
OUTBOARD GEARBOXES	190 HP		
ITTER GEARBOX	235 HP		
GEARBOX RPM	540 OR 1000 RPM		
GEARBOX OIL	85W-140 (FACTORY FILLED)		
OUTPUT SHAFT DIAMETER	2"		
INPUT PTO	ASAE CAT 6 CV		
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH		
HITCH	SWIVEL PIVOT LEVELING		

DECK THICKNESS	10 GA	
SIDE SKIRT MATERIAL	1/4" X 13-1/2"	
HEIGHT Adjustment	HYD. CYLINDER	
WING Adjustments	HEAVY DUTY TURNBUCKLE	
SUSPENSION	1 HEAVY DUTY SPRING	
WING FLEX	22 DEGREES DOWN TO 88 DEGREES UP	
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP	
WING CYLINDERS	SINGLE ACTING STD	
SKID SHOES (STANDARD)	REPLACEABLE	
SAFETY Deflectors	SINGLE ROW STANDARD	
TOW CHAINS	STANDARD	
BLADE OVERLAP	6"	
BLADE CARRIER	ROUND PAN	
WHEELS & TIRES	4-20" laminated std (optional 4 or 6 tires in 26" laminated, 29" aircraft or 26" foam filled)	
DECK RINGS	N/A	
LED LIGHT KIT	OPTIONAL	
GEARBOX WARRANTY	5 YEAR LIMITED	