

EZ1000 Series Online Colorimetric Nickel Analyzer

Applications

- Wastewater
- Drinking Water
- Surface Water



Online colorimetric analysis of dissolved Nickel in water

Results you can rely on

EZ1000 Nickel Analyzers achieve excellent precision and accuracy. At the heart of the colorimeter there is a compact photometer assembly developed especially for the EZ Series. Consumption of reagents is reduced by low volume analysis, yet high sensitivity is assured by a long optical path length. The limit of detection is in the low $\mu\text{g/L}$ range.

Smart automatic features for calibration, validation, priming and cleaning are embedded in the controller software and contribute to analytical performance, maximized uptime and negligible operator intervention. Precision micropumps dose all reagents. Sample lines and analysis vessel are cleaned with demineralised water to eliminate cross contamination between samples. Electronic and wet-chemical part of the analyzer are strictly separated. A transparent door allows for instant visual inspection of the wet part.

Flexibility that meets your needs

EZ Series Nickel Analyzers come in an attractive, ergonomic mainframe with a compact footprint. All hardware is controlled by the integrated industrial panel PC. The modular build allows for the analyzer to match your application and operational needs.


- The standard measuring range can be narrowed by a different calibration range or extended via internal dilution options.
- Analog and digital output options
- Multiple stream analysis for up to 8 sample streams

Technical Data*

| | |
|---------------------------------------|--|
| Parameter | Nickel Ni(II), dissolved |
| Measurement Method | Colorimetric measurement using DMG color solution |
| Range | 10 - 500 µg/L Ni Optional: 5 - 125 µg/L 5 - 250 µg/L 80 - 2000 µg/L (with internal dilution) 160 - 4000 µg/L (with internal dilution) 1 - 50 mg/L (with internal dilution) |
| Precision | Better than 2% full scale range for standard test solutions |
| Lower Limit of Detection (LOD) | ≤ 5 µg/L |
| Interferences | Metal ions like Aluminium Al(III), Bismuth Bi(III), Cadmium Cd(II), Chromium Cr(III), Cobalt Co(II), Copper Cu(II), Iron Fe(II), Iron Fe(III), Lead Pb(II), Manganese Mn(II), Magnesium Mg(II), Mercury Hg(II), Palladium Pd(II), Platinum Pt(II), Silver Ag(I), Tin Sn(II), Zinc Zn(II). Large amounts of colour and turbidity interferes. Fats, oil, proteins, surfactants and tar. |
| Cycle Time | 10 minutes (dilution + 5 min.) |
| Automatic cleaning | Yes |
| Calibration | Automatic, 2-point; frequency freely programmable |
| Validation | Automatic; frequency freely programmable |
| Ambient Temperature | 10 - 30 °C ± 4 °C deviation (50 - 86 °F ± 7.2 °F deviation) at 5 - 95% relative humidity (non-condensing) |
| Reagent Requirements | Keep between 10 - 30 °C (50 - 86 °F) |
| Sample Pressure | By external overflow vessel |
| Sample Flow Rate | 100 - 300 mL/min |
| Sample Temperature | 5 - 30 °C (41 - 86 °F) |
| Sample Quality | Maximum particle size 100 µm, < 0.1 g/L; Turbidity < 50 NTU |
| Power | 100 - 240 VAC, 50/60 Hz Max. power consumption: 120 VA |
| Instrument Air | Dry and oil free according to ISA-S7.0.01-1996 quality standard for instrument air |
| Demineralized Water | For rinsing / dilution |
| Drain | Atmospheric pressure, vented, min. Ø 64 mm |
| Earth Connection | Dry and clean earth pole with low impedance (< 1 Ohm) using an earth cable of > 2.5 mm ² |
| Analog Outputs | Active 4 - 20 mA max. 500 Ohm load, standard 1, max. 8 (option) |
| Digital Outputs | Optional: Modbus (TCP/IP, RS485) |
| Alarm | 1 x malfunctioning, 4 x user-configurable, max. 24 VDC/0.5 A, potential free contacts |
| Protection Class | Analyzer cabinet: IP44 / Panel PC: IP65 |
| Material | Hinged part: Thermoform ABS, door: plexiglass Wall section: Galvanized steel, powder coated |
| Dimensions (H x W x D) | 690 mm x 465 mm x 330 mm |
| Weight | 25 kg (55 lbs.) |
| Certifications | CE compliant / ETL certified |

*Subject to change without notice.

Dimensions

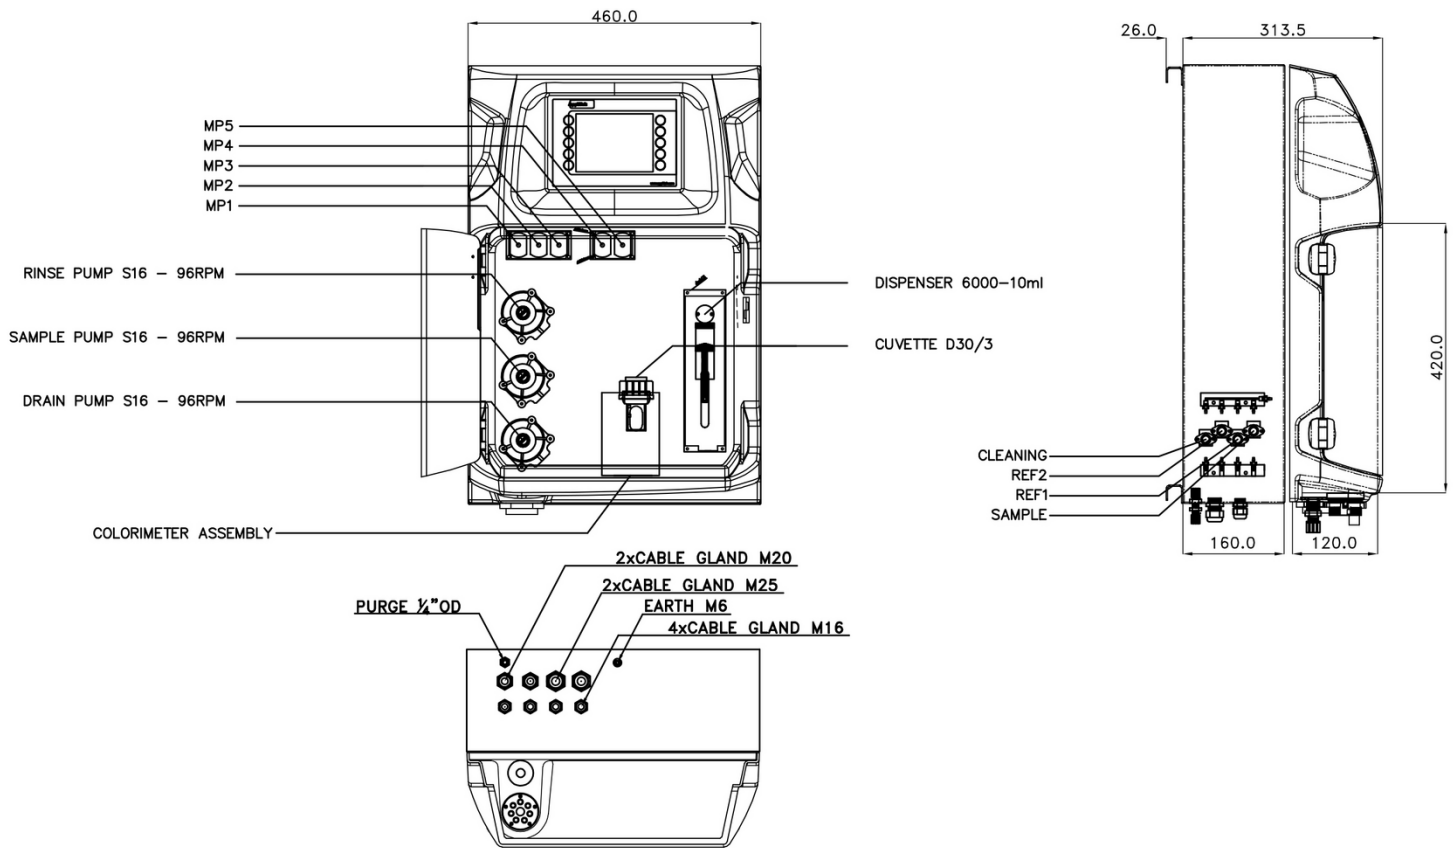

Hach Service

With Hach Service, you have a global partner who understands your needs and cares about delivering timely, high-quality service you can trust. Our Service Team brings unique expertise to help you maximize instrument uptime, ensure data integrity, maintain operational stability, and reduce compliance risk.

Order Information - Part Number Configurator

| Ni(II), 10-500 µg/L | EZ1027.52 | X | X | X | X | X | 2 |
|--|-----------|---|---|---|---|---|---|
| Measurement range settings / Dilution options | | | | | | | |
| 25% of standard range | | B | | | | | |
| 50% of standard range | | C | | | | | |
| Standard range | | 0 | | | | | |
| Internal micropump dilution (factor 4) | | 1 | | | | | |
| Internal micropump dilution (factor 8) | | 2 | | | | | |
| Internal dispenser dilution (max. factor 100) | | 5 | | | | | |
| Power supply | | | | | | | |
| Standard 100 - 240 VAC, 50/60 Hz | | | 0 | | | | |
| Number of sample streams | | | | | | | |
| 1 stream | | | | | 1 | | |
| 2 streams | | | | | 2 | | |
| 4 streams | | | | | 4 | | |
| 8 streams | | | | | 8 | | |
| Outputs | | | | | | | |
| 1x mA | | | | | | 1 | |
| 2x mA | | | | | | 2 | |
| 4x mA | | | | | | 4 | |
| 8x mA | | | | | | 8 | |
| 1x mA + Modbus RS485 | | | | | | E | |
| 2x mA + Modbus RS485 | | | | | | F | |
| 4x mA + Modbus RS485 | | | | | | H | |
| 8x mA + Modbus RS485 | | | | | | P | |
| 1x mA + Modbus TCP/IP | | | | | | I | |
| 2x mA + Modbus TCP/IP | | | | | | J | |
| 4x mA + Modbus TCP/IP | | | | | | L | |
| 8x mA + Modbus TCP/IP | | | | | | T | |
| No adaption, standard version | | | | | | | 0 |