

sensION™+ MM374
 Benchtop Multi-Parameter Meter



Complete Simplicity
 Hach sensION+, an all-in-one system with guided menu navigation makes general electrochemistry testing fast and simple. Each system is designed to be used in a wide variety of applications and comes complete with everything you need to start testing.

Features and Benefits

- **sensION™+ MM374** is a high performance instrument that combines a pH meter, an ion meter, and a conductivity meter.
- Multi-parameter instrument with two measuring channels: Channel 1, pH and Conductivity with temperature °C; Channel 2, pH, ORP/Redox or I.S.E. + °C
- It is supplied with magnetic stirrer, calibration flasks, pH buffers and conductivity standard solutions.
- In addition, there is a connection for a second stirrer which allows for a second measuring stand.
- Data logger-Storage of up to 330 measurements per channel.
- Includes RS 232 C connectivity for printer or PC as well as a connection for external PC keyboard or barcode reader.

Recommended Sensors

pH Electrode


LZW5014.97.0002: 5014 Universal and high performance, for general aqueous samples, sulfurs, reducing sugars or applications that react with silver ions.

- Refillable
- Thick glass body
- 2 ceramic junctions
- High performance electrode with encapsulated reference element and Ag+ ion barrier
- pH 0 to 14, Temp. -10 to 100°C (14 to 212°F)

Conductivity Cell

LZW5070.97.002: 5070 Universal, for general aqueous samples.

- Includes 3 platinum electrodes, 2 pole cell
- With 8 contact telephone connector
- Includes temperature sensor Pt 1000
 $C \approx 0.7 \text{ cm}^{-1}$. EC 0.2 to 200.000 $\mu\text{S/cm}$, Temp. -30°C (-22° F) to 85°C (185°F)

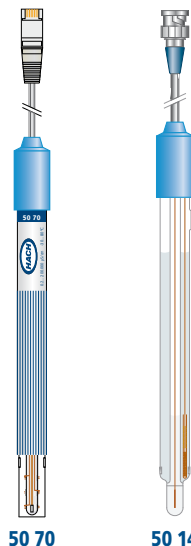

Be Right™

Specifications

	Measurement Ranges	Resolution	Input Accuracy (± 1 digit)	Reproducibility (± 1 digit)
pH	-2 to 16	0.1/0.01/0.001	≤0.002	±0.001
mV	±2000	0.1/1	≤0.2	±0.1
Temp.	-20 to 150°C (-4 to 302°F)	0.1 °C (0.1°F)	≤0.2 °C (0.4°F)	±0.1°C (0.1°F)
ISE	10 ⁻⁶ M to 10 ⁻¹ M	programmable	--	--
Conductivity	0.001* μS/cm to 1000* mS/cm * With 5070 cell: 0.2 μS/cm to 200 mS/cm	variable	≤0.5 %	±0.1 %
Resistivity	0 Ohm to 500 MOhm	--	≤0.5%	± 0.1 %
Salinity	5.85 mg/L to 311.1 g/l NaCl	--	--	--
NaCl	--	variable	≤0.5 %	±0.1 %
TDS	0 mg/L to 500 g/L	variable	≤0.5 %	±0.1 %

Temperature Compensation Automatic with temperature probe Pt 1000, NTC 10kOhm. Programmable isopotential pH, standard value at pH 7.00 EC: TC (temperature coefficient) Linear, 0.00 to 9.99 % /°C. Non linear for natural waters (UNE EN 27888). TR (ref. temperature) 20°C (68°F), 25°C (77°F) or values between 0 to 99°C (0 to 210°F).

pH Calibration Technical buffers DIN 19267: pH 2.00, 4.01, 7.00, 9.21 and 10.01 (values at 25°C)(77°F). DIN 19266 buffers: 1.679, 4.006, 6.865, 7.000, 9.180, 10.012 and 12.454 at 25°C (77 °F). Specific user's buffers. With 1, 2 or 3 buffers selectable inside the range. Calibration at any pH value (indirect calibration). Manual introduction of the calibration parameters. Programmable calibration validity between 0 h to 7 days. Automatic rejection of electrodes in poor condition.

mV Calibration Automatic recognition of redox standard 220 mV at 25°C (77°F). Calibration at any mV value.

ISE Calibration 2 to 5 programmable standards. Selectable calibration units: mol/L, M, mmol/L, mM, umol/L, g/L, mg/L, ppm and %. Up to 4 calibration curves per channel.

Conductivity Calibration Standards: 147 μS/cm, 1413 μS/cm, 12.88 mS/cm and 111.8 mS/cm [values at 25°C (77°F)]. Demal, 1409 μS/cm, 12.85 mS/cm and 111.31 mS/cm (25°C). NaCl 0.05 % (1014.9 μS/cm at 25 °C). With 1, 2 or 3 standards selectable inside the range. Special calibration at any Conductivity, salinity or TDS value. Manual introduction of cell constant. Programmable calibration validity between 0 to 99 days.

TDS Conversion Factor Values between 0 to 4.44. Default 0.64.

Temperature Readjustment Correction of the temperature probe deviation (A.T.C.) at 25°C (77°F) and 85°C (185°F).

Data Logger Storage capacity up to 330 readings per channel.

Languages English, German, Spanish, French, Italian and Portuguese.

Display Graphic, backlit liquid crystal, 128 x 64 dots.

Connectable Sensors 2 combined or indicator electrodes, BNC connector (Imp. >10¹²Ω).

2 Reference electrodes, banana connector.

1 A.T.C. type Pt 1000 or NTC 10kOhm.,

1 Conductivity cell with built-in Pt 1000 sensor, telephone connector.

Connectable Peripherals 2 magnetic stirrers. Printer or PC. External PC keyboard or barcode reader.

Directives Low Voltage and EMC According to 2004/95/EC. According to 2004/108/EC.

Power Supply External power supply 100-240 V, 0.4 A, 47-63 Hz, with plug adapters.

Materials Enclosure, ABS and PC. Keypad, PET with protective treatment.

Physical Parameters Weight: 1100 g. Size: 350 x 200 x 110 mm.

How To Order

LPV4110.97.0002 Multimeter SensION+ MM374, with accessories

LPV4140T.97.0002 Multimeter SensION+ MM374, accessories, electrode **5014** and conductivity cell **5070**.

Included Accessories

- Magnetic stirrer
- Sensor holder
- User manual
- Calibration flasks with magnetic stirring bar
- Solutions: pH 4, pH 7, Conductivity standard 1413 μS/cm and KCl

Other Accessories:

LZW8201 Thermal printer of 40 columns, interface RS.

LZW8200 Impact printer of 40 columns, interface RS.

Lit. No. 2697 E

Edition 07.10 Printed in U.S.A. ©HACH Company 2009. All rights reserved.

In the interest of improving and updating its equipment, Hach Company reserves the right to alter specifications to equipment at any time.

At Hach, it's about learning from our customers and providing the right answers. It's more than ensuring the quality of water—it's about ensuring the quality of life.

When it comes to the things that touch our lives... Keep it pure.

Make it simple.

Be right.

For current price information, technical support, and ordering assistance, contact the Hach office or distributor serving your area.

In the United States, contact:

HACH COMPANY World Headquarters
P.O. Box 389
Loveland, Colorado 80539-0389
U.S.A.
Telephone: 800-227-4224
Fax: 970-669-2932
E-mail: orders@hach.com
www.hach.com

U.S. exporters and customers in Canada, Latin America, sub-Saharan Africa, Asia, and Australia/New Zealand, contact:

HACH COMPANY World Headquarters
P.O. Box 389
Loveland, Colorado 80539-0389
U.S.A.
Telephone: 970-669-3050
Fax: 970-461-3939
E-mail: intl@hach.com
www.hach.com

In Europe, the Middle East, and Mediterranean Africa, contact:

HACH LANGE GmbH
Willstätterstraße 11
D-40549 Düsseldorf
GERMANY
Tel: +49 (0) 211 5288-0
Fax: +49 (0) 211 5288-143
E-mail: info@hach-lange.de
www.hach-lange.com



Be Right™