

# SmokeBlock® Fireblocking Foam



## Applications

SmokeBlock® Fireblocking Foam installs in seconds filling voids and annular spaces around penetrants preventing the spread of smoke and hot gasses. SmokeBlock® Fireblocking Foam can be applied in both vertical and horizontal applications and is suitable to use in one and two family dwellings. **Not Suitable for Use in Fire-Rated Construction.**

## PHYSICAL PROPERTIES

Color	Salmon Red/Pink
Density	1.56 lbs/cu ft (24.98 kg/cu m)
Flame Spread*	15
Smoke Development*	35
In Service Temperature	40°F (4°C) to 200°F (93°C)
Application Temperature	40°F (4°C) to 115°F (46°C)
Storage Temperature	40°F (4°C) to 95°F (35°C)
Cellular Structure	70% to 80% Closed Cell
Tack Free Time (1" Bead)	10 Minutes
Shelf Life	12 months

\*Tested to ASTM E-84/UL723

## Limitations


This product has been designed to be safe with plastics. It has been used extensively and successfully with various types of plastic pipes, tubes, and plastic cable insulations. Variations in these materials, however, make it impossible to guarantee compatibility. STI strongly recommends that the user consults with the pipe, tubing, or cable manufacturer in question regarding any known sensitivities or potential restrictions before applying this product.

## Technical Service

Specified Technologies Inc. provides toll free technical support to assist in product selection and appropriate installation design. A complete library of technical information is provided at the company's website [www.stifirestop.com](http://www.stifirestop.com) including Safety Data Sheets (SDS's).

## Availability

SmokeBlock® Fireblocking Foam is available from Specified Technologies Inc. (STI) authorized distributors. For additional purchasing and technical information or for the names and locations of the nearest representative and/or distributor, regarding this and other Specified Technology products, please call 1-800-992-1180 or visit [www.stifirestop.com](http://www.stifirestop.com).

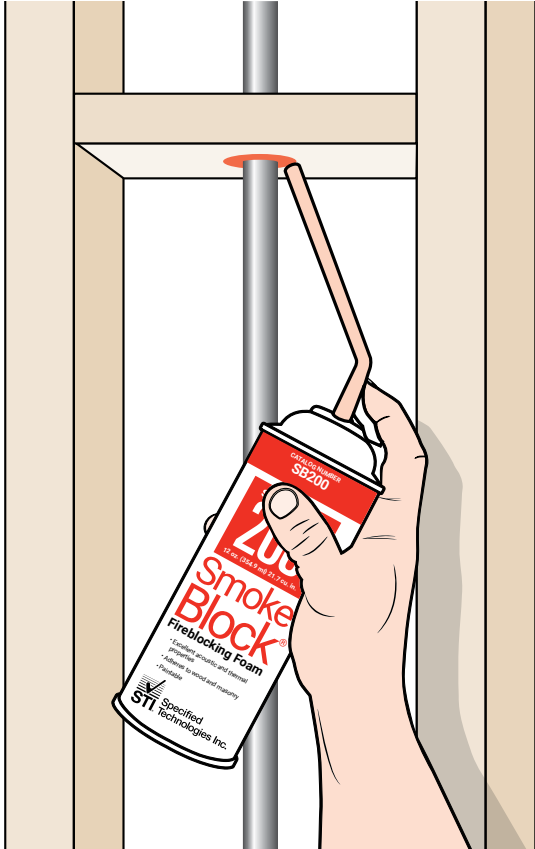

### Features & Benefits

- Excellent acoustic and thermal properties
- Adheres to Wood and Masonry
- Dispensable at any angle
- Paintable

## ORDERING INFORMATION

Catalog Number	UPC Number	Size	(UOM) Qty.	Case Qty.	Weight (Each)
SB200	730573011614	12 Oz Can - 22 cu in (355 ml)	1	12	1.07 lbs (0.49 kg)

IMPORTANT NOTICE: ALL STATEMENTS, TECHNICAL INFORMATION, AND RECOMMENDATIONS CONTAINED HEREIN ARE BASED UPON TESTING BELIEVED TO BE RELIABLE, BUT THE ACCURACY AND COMPLETENESS THEREOF IS NOT GUARANTEED.

STI TYPICALLY WARRANTIES ITS PRODUCTS FOR ONE FULL YEAR. FOR COMPLETE DETAILS OF OUR STANDARD WARRANTY, PLEASE VISIT [WWW.STIFIRESTOP.COM/LEGAL/WARRANTY](http://WWW.STIFIRESTOP.COM/LEGAL/WARRANTY)

MADE IN THE USA - © 2021 SPECIFIED TECHNOLOGIES INC.

