





## PERIMETER FIRE CONTAINMENT PROTECTION

# SpecSeal® Quick Clip™ Perimeter Fire Containment System (L-Brackets)

SpecSeal® Quick Clip™ Factory Installation System (L-Bracket) is the fastest way to install curtain wall insulation for perimeter fire containment systems. Simply fasten the L-shaped brackets to the mullion, cut and fit the curtain wall insulation and then secure the insulation in place with self-locking fasteners. The brackets allow the stiffener channel to be eliminated in most insulation applications above 2 inches. If required, the stiffener channel may be locked into place without an additional mechanical attachment. This versatile system is great for factory-installed curtain wall panels or recladding projects where the system will be installed from the building's exterior.

### Features & Benefits

- Fasteners provide a quicker insulation install compared to screws or weld pins
- Eliminates stiffener for most insulation applications above 2 inches
- Easy installation of stiffener channel (when required)
- Eliminates the need for impaling pins and spikes; improving installation safety
- Allows for factory installation of curtain wall spandrel panels
- L-brackets are available with or without tabs, offering design and application flexibility
- All components may be installed from the glass side making glazing easier – no more flipping units!
- Tested to ASTM E1233 for 100 MPH+ wind loads
- Meets ASTM E2307 for up to 2 hours of fire resistance

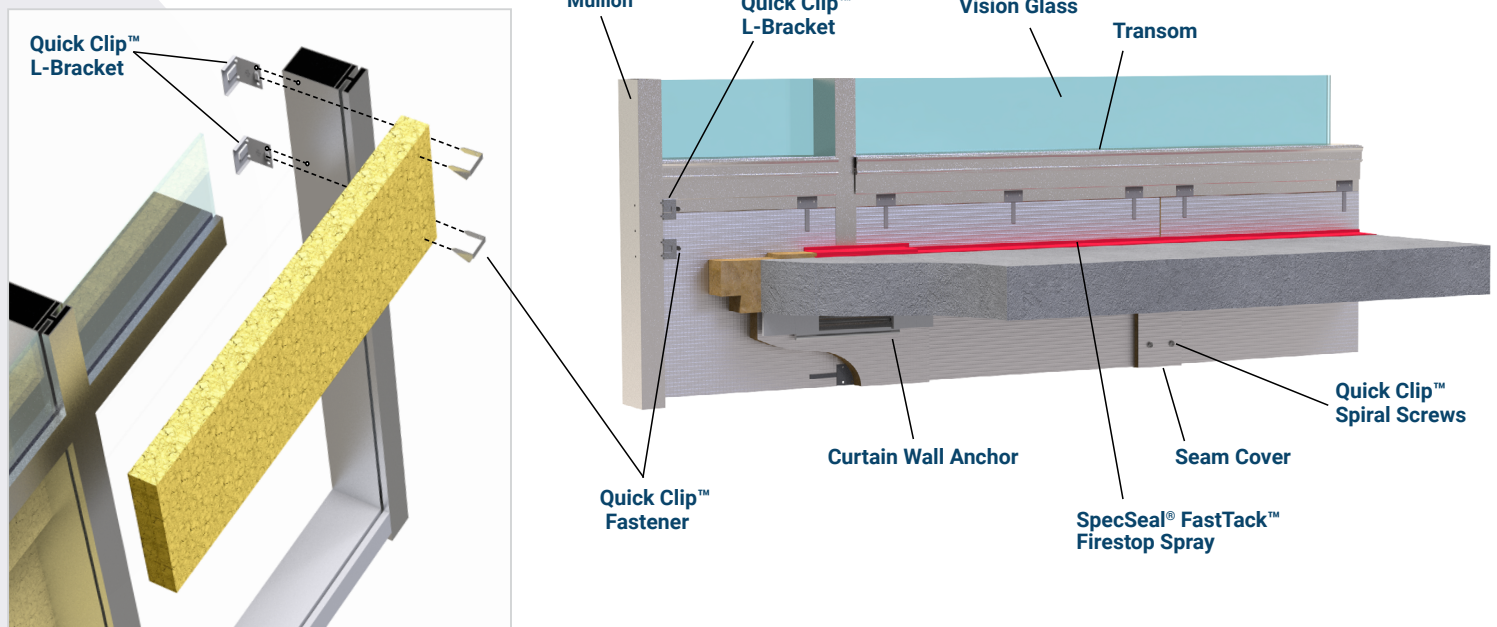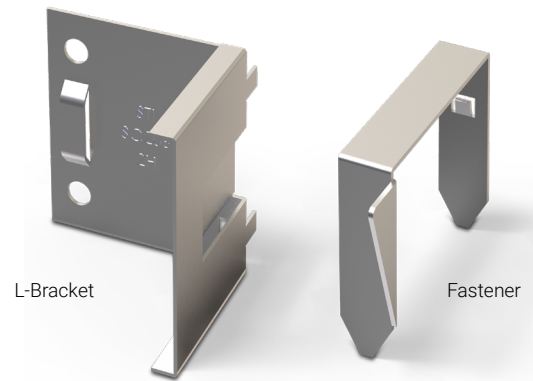




PERIMETER FIRE CONTAINMENT PROTECTION

**SpecSeal® Quick Clip™ Perimeter Fire Containment System (L-Brackets)**

The easiest factory installed system available today.

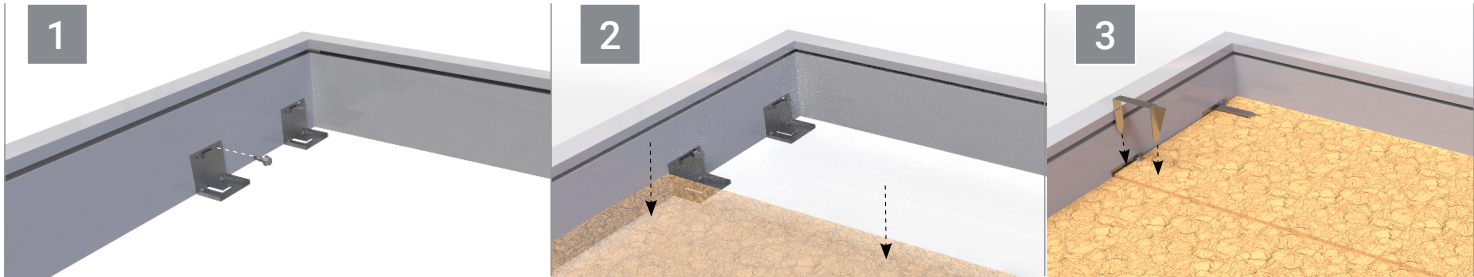

ORDERING INFORMATION					
Catalog Number	UPC Number	Product Name	Insulation Thickness	Weight (Each)	Case Qty.
SC20B	730573100271	Quick Clip™ L-Bracket	2" (50.8 mm)	0.08 lbs (0.04 kg)	100
SC30B	730573100288	Quick Clip™ L-Bracket	3" (76.2 mm)	0.11 lbs (0.05 kg)	100
SC40B	730573100295	Quick Clip™ L-Bracket	4" (101.6 mm)	0.13 lbs (0.06 kg)	100
SC50B	730573952283	Quick Clip™ L-Bracket	5" (127 mm)	0.15 lbs (0.07 kg)	100
SC60B	730573952290	Quick Clip™ L-Bracket	6" (152.4 mm)	0.18 lbs (0.08 kg)	100
SC20BNT	730573952177	Quick Clip™ L-Bracket w/no tabs	2" (50.8 mm)	0.08 lbs (0.04 kg)	100
SC30BNT	730573952184	Quick Clip™ L-Bracket w/no tabs	3" (76.2 mm)	0.11 lbs (0.05 kg)	100
SC40BNT	730573952191	Quick Clip™ L-Bracket w/no tabs	4" (101.6 mm)	0.13 lbs (0.06 kg)	100
SC50BNT	730573952207	Quick Clip™ L-Bracket w/no tabs	5" (127 mm)	0.15 lbs (0.07 kg)	100
SC60BNT	730573952214	Quick Clip™ L-Bracket w/no tabs	6" (152.4 mm)	0.18 lbs (0.08 kg)	100
SB2020	730573100257	Quick Clip™ Fastener (2" x 2" staple)	2" (50.8 mm) to 4" (101.6 mm)	0.04 lbs (0.02 kg)	100
SB2040	730573952221	Quick Clip™ Fastener (2" x 4" staple)	5" (127 mm) to 6" (152.4 mm)	0.07 lbs (0.03 kg)	100
SA375	730573100264	Quick Clip™ Spiral Screws	All	0.02 lbs (0.01 kg)	1000



TEST STANDARDS: ASTM E1233, ASTM E2307



Permanent Solution



Metallic Color

