


## Quick Clip™ L-Bracket Perimeter Fire Containment System

SpecSeal® Quick Clip™ L-Bracket Perimeter Fire Containment System is the fastest way to install curtain wall insulation for perimeter fire containment systems. Simply fasten the L-shaped brackets to the mullion, cut and fit the curtain wall insulation, and then secure the insulation in place with self-locking fasteners. The brackets also allow the stiffener

channel to be locked into place without additional mechanical attachment. This versatile system is great for factory-insulated curtain wall panels or recladding projects where the system will be installed from the building's exterior.

## **Features & Benefits**


- Tested to ASTM F1233 for 100 MPH+ wind-loads
- All components can be installed from the glass side to make glazing easier - no more flipping units
- Meets ASTM E2307 for up to 2 hours of fire resistance
- Patent Numbers: 10329761, 10329762, 10626603, 10724233, 11898348



**Completed field installation** 

(some components installed by others)


## Quick Clip™ **Perimeter Fire Containment System Exploded View**

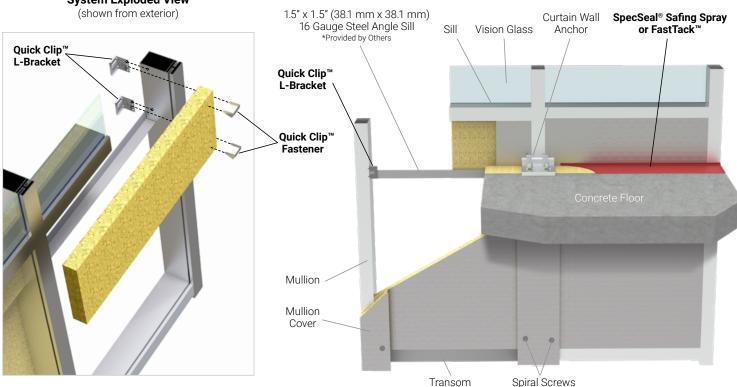






Transom





The easiest factory installed system available today.

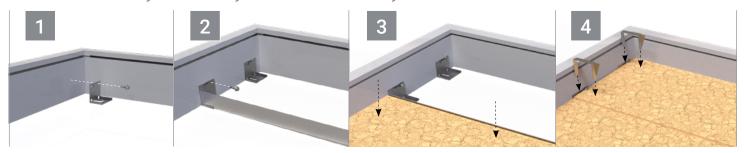

ORDERING INFORMATION												
Catalog Number	UPC Number	Catalog Number	Product Name	Product Image	Mullion Width	Insulation Thickness	Weight (Each)	Case Qty	Material			
SC20B	730573100271	SC20B	Quick Clip™ L-Bracket			2" (50.8 mm)	0.09 lbs (0.04 kg)	100	Galvanized steel			
SC30B	730573100288	SC30B	Quick Clip™ L-Bracket		All	3" (76.2 mm)	0.11 lbs (0.05 kg)	100				
SC40B	730573100295	SC40B	Quick Clip™ L-Bracket		_	4" (101.6 mm)	0.13 lbs (0.06 kg)	100				
SB2020	730573100257	SB2020	Quick Clip™ Fastener		All	All	0.04 lbs (0.02 kg)	100	Galvanized steel			
SA375	730573100264	SA375	Quick Clip™ Spiral Screws	CONTROL OF THE STREET	N/A	All	0.02 lbs (0.01 kg)	1000	Galvanized steel			

ORDERING INFORMATION - PERIMETER FIRE CONTAINMENT FIRESTOP SPRAY										
Catalog Number	UPC Number	Description	(UOM) Qty.		Weight (Each)					
SFS105	730573071175	5 gallon pail - 1,155 cu. in. (19 liters) SpecSeal® Safing Spray for Perimeter Fire Containment	1	1	56.00 lbs (25.40 kg)					
FT305	730573011904	SpecSeal® Fast Tack® Firestop Spray 5 gallon pail - 1,155 cu. in. (19 liters)	1	1	51.33 lbs (23.28 kg)					
FT305R	730573011935	SpecSeal® Fast Tack® Firestop Spray 5 gallon pail - 1,155 cu. in. (19 liters)	1	1	51.33 lbs (23.28 kg)					



TEST STANDARDS: ASTM E1233, ASTM E2307



Metallic Color

Permanent Solution