






PERIMETER FIRE CONTAINMENT PROTECTION

SpecSeal® Quick Clip™ Perimeter Fire Containment System (L-Brackets)

SpecSeal® Quick Clip™ Factory Installation System (L-Bracket) is the fastest way to install curtain wall insulation for perimeter fire containment systems. Simply fasten the L-shaped brackets to the mullion, cut and fit the curtain wall insulation and then secure the insulation in place with self-locking fasteners. The brackets allow the stiffener channel to be eliminated in most insulation applications above 2" (50.8 mm). If required, the stiffener channel may be locked into place without an additional mechanical attachment. This versatile system is great for factory-installed curtain wall panels or recladding projects where the system will be installed from the building's exterior.

Features & Benefits

- Fasteners provide a quicker insulation install compared to screws or weld pins
- Eliminates stiffener for most insulation applications above 2" (50.8 mm)
- Easy installation of stiffener channel (when required)
- Eliminates the need for impaling pins and spikes; improving installation safety
- Allows for factory installation of curtain wall spandrel panels
- L-brackets are available with or without tabs, offering design and application flexibility
- All components may be installed from the glass side making glazing easier – no more flipping units!
- Tested to ASTM E1233 for 100 MPH+ wind loads
- Meets ASTM E2307 for up to 2 hours of fire resistance

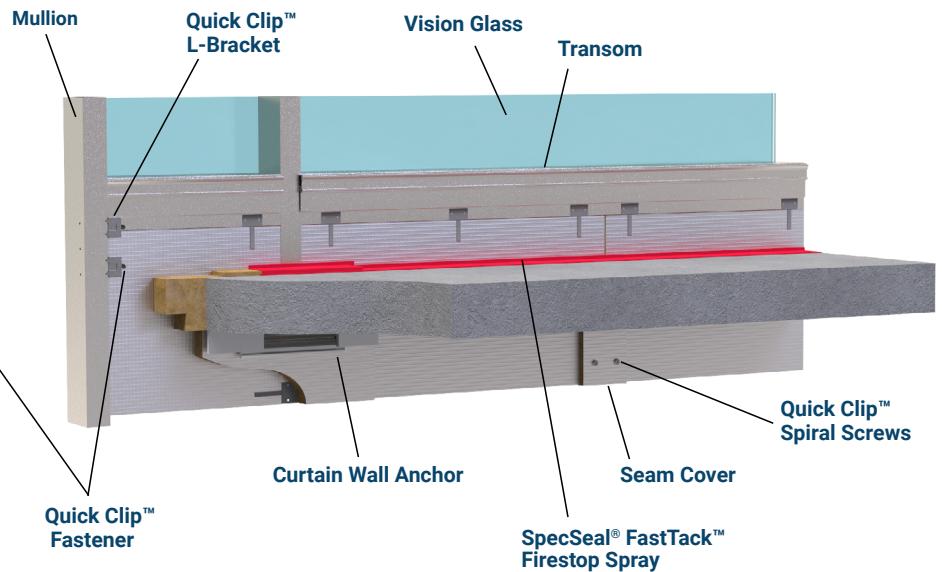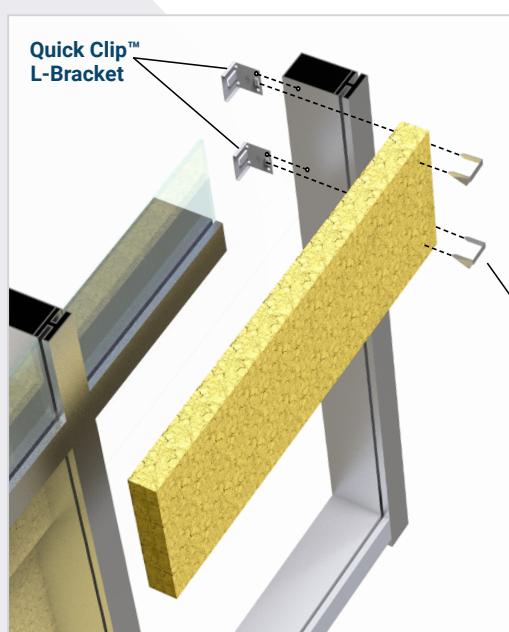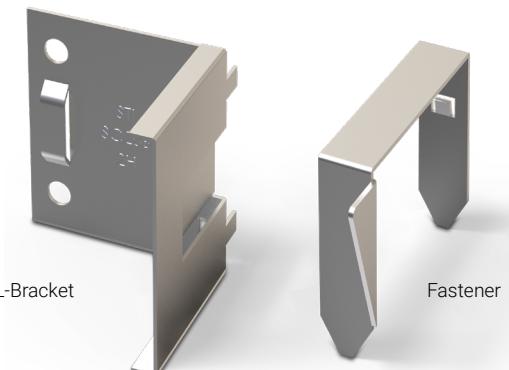




PERIMETER FIRE CONTAINMENT PROTECTION

SpecSeal® Quick Clip™ Perimeter Fire Containment System (L-Brackets)

The easiest factory installed system available today.

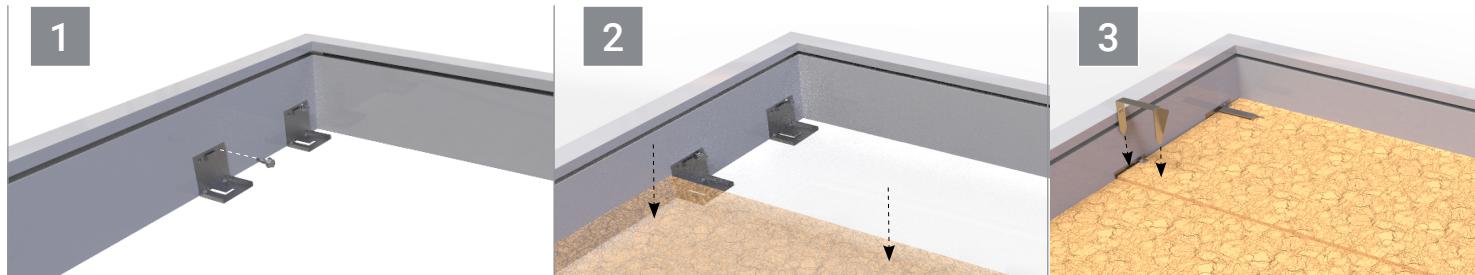

ORDERING INFORMATION

Catalog Number	UPC Number	Product Name	Insulation Thickness	Weight (Each)	Case Qty.
SC20B	730573100271	Quick Clip™ L-Bracket	2" (50.8 mm)	0.08 lbs (0.04 kg)	100
SC30B	730573100288	Quick Clip™ L-Bracket	3" (76.2 mm)	0.11 lbs (0.05 kg)	100
SC40B	730573100295	Quick Clip™ L-Bracket	4" (101.6 mm)	0.13 lbs (0.06 kg)	100
SC50B	730573952283	Quick Clip™ L-Bracket	5" (127 mm)	0.15 lbs (0.07 kg)	100
SC60B	730573952290	Quick Clip™ L-Bracket	6" (152.4 mm)	0.18 lbs (0.08 kg)	100
SC20BNT	730573952177	Quick Clip™ L-Bracket w/no tabs	2" (50.8 mm)	0.08 lbs (0.04 kg)	100
SC30BNT	730573952184	Quick Clip™ L-Bracket w/no tabs	3" (76.2 mm)	0.11 lbs (0.05 kg)	100
SC40BNT	730573952191	Quick Clip™ L-Bracket w/no tabs	4" (101.6 mm)	0.13 lbs (0.06 kg)	100
SC50BNT	730573952207	Quick Clip™ L-Bracket w/no tabs	5" (127 mm)	0.15 lbs (0.07 kg)	100
SC60BNT	730573952214	Quick Clip™ L-Bracket w/no tabs	6" (152.4 mm)	0.18 lbs (0.08 kg)	100
SB2020	730573100257	Quick Clip™ Fastener (2" x 2" staple)	2" (50.8 mm) to 4" (101.6 mm)	0.04 lbs (0.02 kg)	100
SB2040	730573952221	Quick Clip™ Fastener (2" x 4" staple)	5" (127 mm) to 6" (152.4 mm)	0.07 lbs (0.03 kg)	100
SA375	730573100264	Quick Clip™ Spiral Screws	All	0.02 lbs (0.01 kg)	1000



TEST STANDARDS: ASTM E1233, ASTM E2307



Metallic Color

