




## PERIMETER FIRE CONTAINMENT PROTECTION

# SpecSeal® Quick Clip™ Perimeter Fire Containment System (L-Brackets)


SpecSeal® Quick Clip™ L-Bracket Perimeter Fire Containment System is the fastest way to install curtain wall insulation for perimeter fire containment systems. Simply fasten the L-shaped brackets to the mullion, cut and fit the curtain wall insulation, and then secure the insulation in place with self-locking fasteners. The brackets also allow the stiffener channel to be locked into place without an additional mechanical attachment. This versatile system is great for factory-installed curtain wall panels or recladding projects where the system will be installed from the building's exterior.

### Features & Benefits


- Only out-of-the-box large diameter collar offering
- Fasteners provide a quicker insulation install compared to screws or weld pins
- Easy installation of stiffener channel
- Eliminates the need for impaling pins and spikes; improving installation safety
- Allows for factory installation of curtain wall spandrel panels
- L-brackets are available with or without tabs, offering design and application flexibility
- All components may be installed from the glass side making glazing easier – no more flipping units!
- Tested to ASTM E1233 for 100 MPH+ wind loads
- Meets ASTM E2307 for up to 2 hours of fire resistance

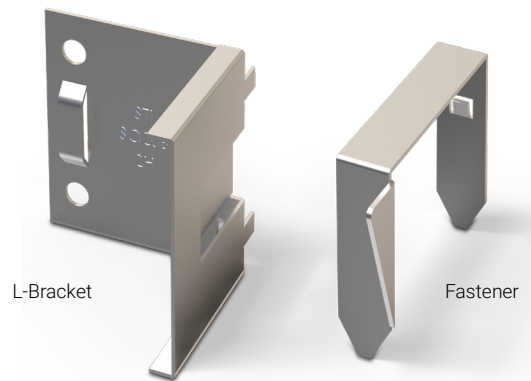

**Quick Clip™ Perimeter Fire Containment System Exploded View**  
(shown from exterior)

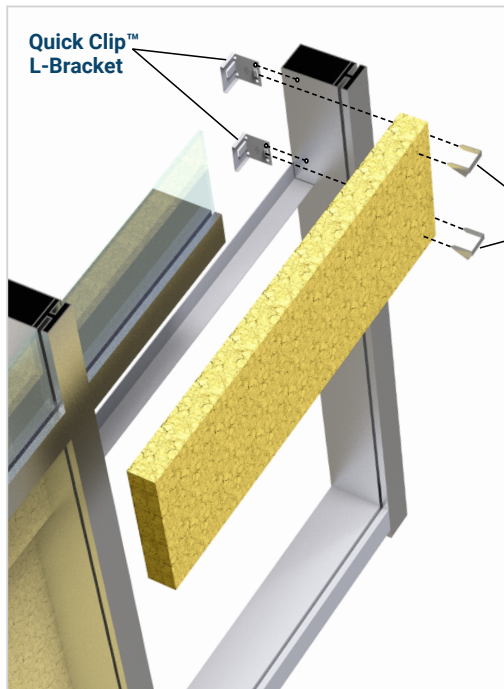

**Completed field installation**  
(some components installed by others)

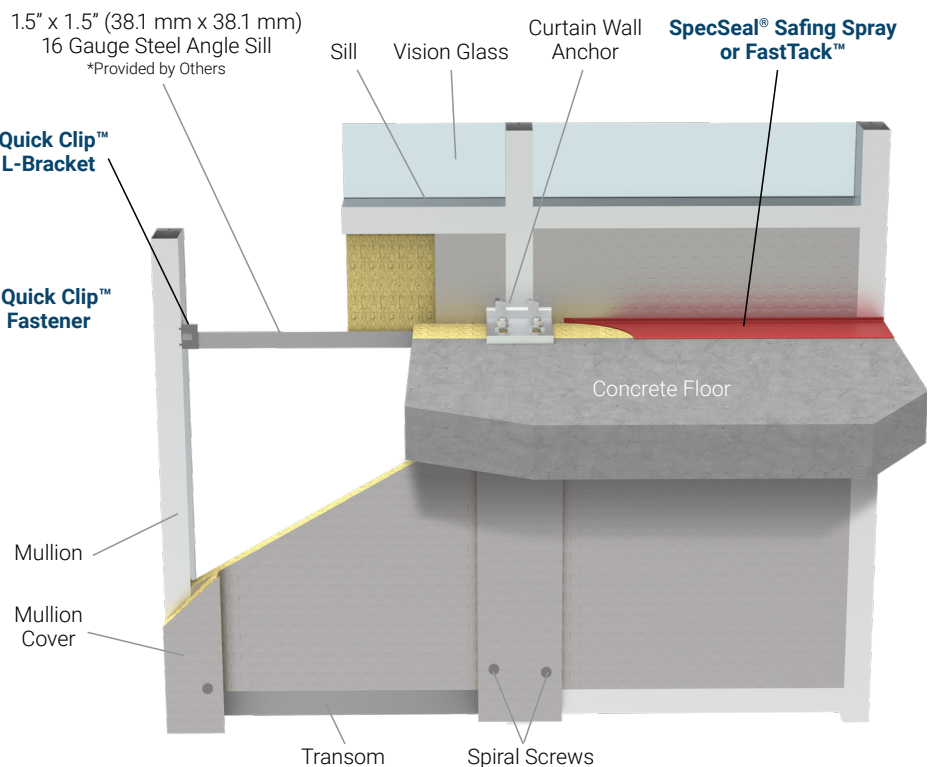




PERIMETER FIRE CONTAINMENT PROTECTION

SpecSeal® Quick Clip™ Perimeter Fire Containment System (L-Brackets)

The easiest factory installed system available today.

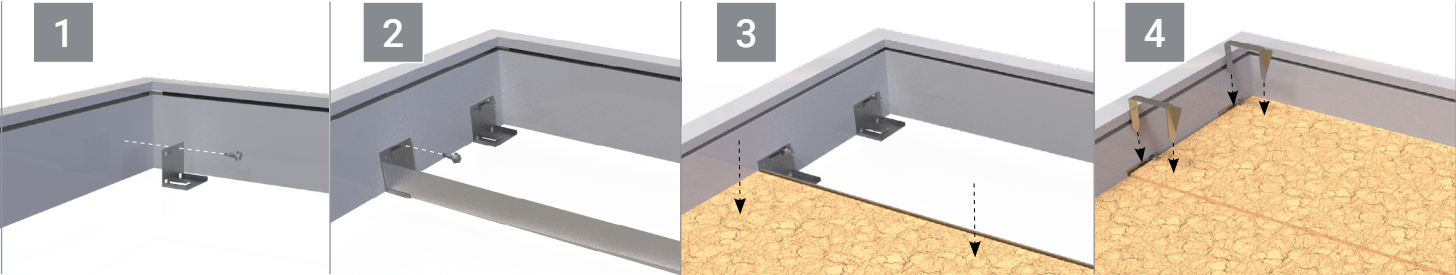

ORDERING INFORMATION

| Catalog Number | UPC Number   | Product Name                          | Insulation Thickness          | Weight (Each)      | Case Qty. |
|----------------|--------------|---------------------------------------|-------------------------------|--------------------|-----------|
| SC20B          | 730573100271 | Quick Clip™ L-Bracket                 | 2" (50.8 mm)                  | 0.08 lbs (0.04 kg) | 100       |
| SC30B          | 730573100288 | Quick Clip™ L-Bracket                 | 3" (76.2 mm)                  | 0.11 lbs (0.05 kg) | 100       |
| SC40B          | 730573100295 | Quick Clip™ L-Bracket                 | 4" (101.6 mm)                 | 0.13 lbs (0.06 kg) | 100       |
| SC50B          | 730573952283 | Quick Clip™ L-Bracket                 | 5" (127 mm)                   | 0.15 lbs (0.07 kg) | 100       |
| SC60B          | 730573952290 | Quick Clip™ L-Bracket                 | 6" (152.4 mm)                 | 0.18 lbs (0.08 kg) | 100       |
| SC20BNT        | 730573952177 | Quick Clip™ L-Bracket w/no tabs       | 2" (50.8 mm)                  | 0.08 lbs (0.04 kg) | 100       |
| SC30BNT        | 730573952184 | Quick Clip™ L-Bracket w/no tabs       | 3" (76.2 mm)                  | 0.11 lbs (0.05 kg) | 100       |
| SC40BNT        | 730573952191 | Quick Clip™ L-Bracket w/no tabs       | 4" (101.6 mm)                 | 0.13 lbs (0.06 kg) | 100       |
| SC50BNT        | 730573952207 | Quick Clip™ L-Bracket w/no tabs       | 5" (127 mm)                   | 0.15 lbs (0.07 kg) | 100       |
| SC60BNT        | 730573952214 | Quick Clip™ L-Bracket w/no tabs       | 6" (152.4 mm)                 | 0.18 lbs (0.08 kg) | 100       |
| SB2020         | 730573100257 | Quick Clip™ Fastener (2" x 2" staple) | 2" (50.8 mm) to 4" (101.6 mm) | 0.04 lbs (0.02 kg) | 100       |
| SB2040         | 730573952221 | Quick Clip™ Fastener (2" x 4" staple) | 5" (127 mm) to 6" (152.4 mm)  | 0.07 lbs (0.03 kg) | 100       |
| SA375          | 730573100264 | Quick Clip™ Spiral Screws             | All                           | 0.02 lbs(0.01 kg)  | 1000      |



TEST STANDARDS: ASTM E1233, ASTM E2307



Permanent Solution



Metallic Color

