




## SpecSeal® Quick Clip™ Perimeter Fire Containment System (U-Brackets & Z-Brackets)

SpecSeal® Quick Clip™ Field Installation System is designed to accelerate the installation of curtain wall insulation for perimeter fire containment systems. The system's unique U-brackets clip onto the mullions without direct attachment by screws. Additionally, the Z-bracket design accommodates corner and non-standard applications. Self-locking fasteners secure the insulation panels in place. The brackets allow the stiffener channel to be eliminated in most insulation applications above 2" (50.8 mm). If required, the stiffener channel may be locked into place without an additional mechanical attachment.

### Features & Benefits

- Quick installation; fewer tools and no fasteners\* for the U-Bracket
- Reduce or eliminate use of steel screws into framing members
- Eliminates stiffener for most insulation applications above 2" (50.8 mm)
- Easy installation of stiffener channel (when required)
- Increased safety by reducing cutting sharp metal and impaling pins or spikes
- Tested to ASTM E1233 for 100 MPH+ wind-loads
- Tested for up to 2 Hours of fire resistance when tested to ASTM E2307


\*If mullion tolerances prevent snug fit of U-Brackets, a screw will be required to hold the bracket in place

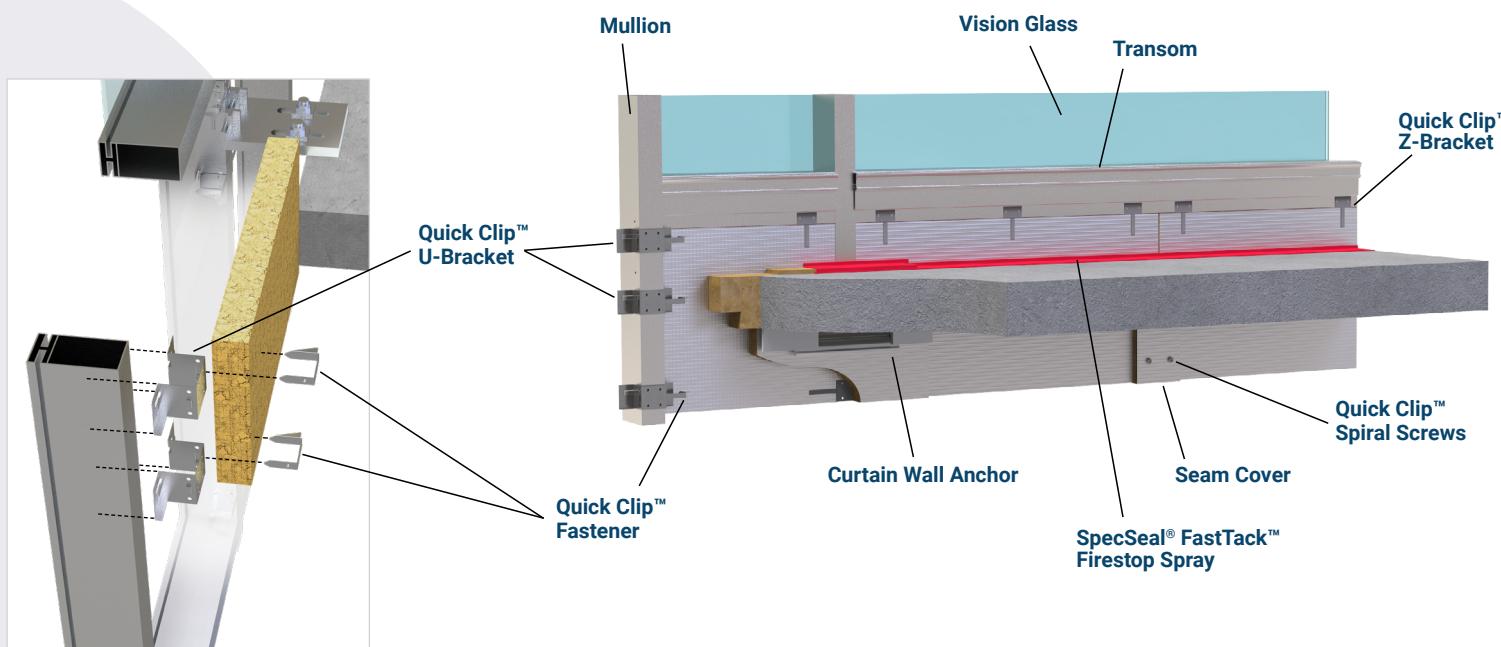



PERIMETER FIRE CONTAINMENT PROTECTION

## SpecSeal® Quick Clip™ Perimeter Fire Containment System (U-Brackets & Z-Brackets)

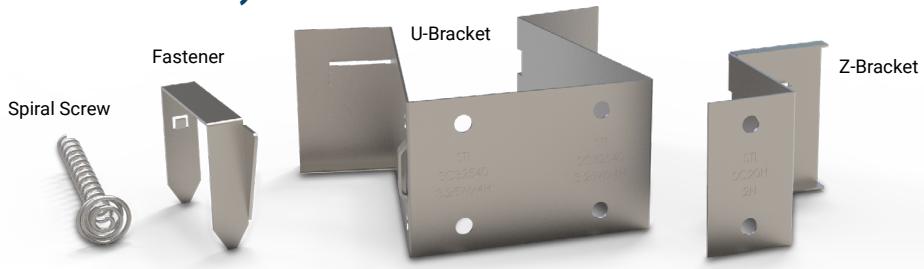

### ORDERING INFORMATION

Catalog Number	UPC Number	Description	Mullion Width Min.	Mullion Width Max.	Insulation	Weight (Each)	Case Qty.	Material
SC25020	730573100011	Quick Clip™ U-Bracket*			2" (50.8 mm)	0.23 lbs (0.10 kg)	100	
SC25030	730573100028	Quick Clip™ U-Bracket*	2.375" (60.3 mm)	2.525" (65.1 mm)	3" (76.2 mm)	0.28 lbs (0.13 kg)	100	Heat treated galvanized steel
SC25040	730573100035	Quick Clip™ U-Bracket*			4" (101.6 mm)	0.32 lbs (0.15 kg)	100	
SC30020	730573100042	Quick Clip™ U-Bracket			2" (50.8 mm)	0.25 lbs (0.11 kg)	100	
SC30030	730573100059	Quick Clip™ U-Bracket	2.875" (73 mm)	3.2" (81.2 mm)	3" (76.2 mm)	0.30 lbs (0.14 kg)	100	Heat treated galvanized steel
SC30040	730573100066	Quick Clip™ U-Bracket			4" (101.6 mm)	0.35 lbs (0.16 kg)	100	
SC20H	730573100103	Quick Clip™ Z-Bracket			2" (50.8 mm)	0.13 lbs (0.06 kg)	100	
SC30H	730573100110	Quick Clip™ Z-Bracket			3" (76.2 mm)	0.15 lbs (0.07 kg)	100	
SC40H	730573100127	Quick Clip™ Z-Bracket	All	All	4" (101.6 mm)	0.14 lbs (0.06 kg)	100	Galvanized steel
SC50H	730573952238	Quick Clip™ Z-Bracket			5" (127 mm)	0.18 lbs (0.08 kg)	100	
SC60H	730573952245	Quick Clip™ Z-Bracket			6" (152.4 mm)	0.20 lbs (0.10 kg)	100	
SB2020	730573100257	Quick Clip™ Fastener (2" x 2" staple)	All	All	2" (50.8 mm) to 4" (101.6 mm)	0.04 lbs (0.02 kg)	100	Galvanized steel
SB2040	730573952221	Quick Clip™ Fastener (2" x 4" staple)	All	All	5" (127 mm) to 6" (152.4 mm)	0.07 lbs (0.03 kg)	100	Galvanized steel
SA375	730573100264	Quick Clip™ Spiral Screw	All	All	All	0.02 lbs (0.01 kg)	1000	Galvanized steel

\* For single extrusion mullions only



TEST STANDARDS: ASTM E1233, ASTM E2307

