




## SpecSeal<sup>®</sup> Quick Clip<sup>™</sup> Perimeter Fire Containment System (U-Brackets & Z-Brackets)

SpecSeal® Quick Clip™ Perimeter Fire Containment System is designed to accelerate the installation of curtain wall insulation for perimeter fire containment systems. The system's unique U-brackets clip onto the mullions without direct attachment by screws to support the curtain wall insulation. Self-locking fasteners secure the insulation panels in place. Each U-bracket has a receiving slot to lock an "L-shaped" stiffener channel in place without the need for mechanical attachment by screws. The Quick Clip™ Z-Brackets attach to the mullion with screws, serving the same function as the U-Brackets while also accommodating corner or non-standard applications.

## **Features & Benefits**

- Quick installation; fewer tools and no fasteners\* for the U-Bracket
- Reduce or eliminate use of steel screws into framing members
- Eliminates stiffener for most insulation applications above 2 inches
- Easy installation of stiffener channel (when required)
- Increased safety by reducing cutting sharp metal and impaling pins or spikes
- Tested to ASTM E1233 for 100 MPH+ wind-loads
- Tested for up to 2 Hours of fire resistance when tested to ASTM E2307
- \*If mullion tolerances prevent snug fit of U-Brackets, a screw will be required to hold the bracket in place

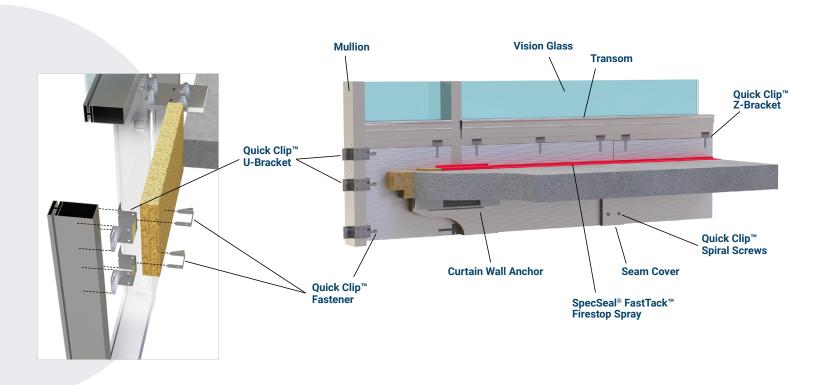








## PERIMETER FIRE CONTAINMENT PROTECTION

## SpecSeal<sup>®</sup> Quick Clip<sup>™</sup> Perimeter Fire Containment System (U-Brackets & Z-Brackets)

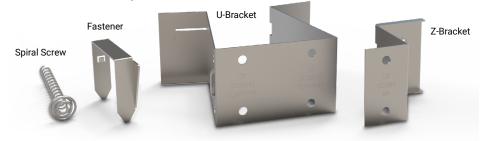

ORDERING INFORMATION								
Catalog Number	UPC Number	Description	<b>Mullior</b> Min.	n <b>Width</b> Max.	Insulation	Weight (Each)	Case Qty.	Material
SC25020	730573100011	Quick Clip™ U-Bracket*	2.375" (60.3 mm)	2.525" (65.1 mm)	2" (50.8 mm)	0.23 lbs (0.10 kg)	100	Heat treated galvanized steel
SC25030	730573100028	Quick Clip™ U-Bracket*			3" (76.2 mm)	0.28 lbs (0.13 kg)	100	
SC25040	730573100035	Quick Clip™ U-Bracket*			4" (101.6 mm)	0.32 lbs (0.15 kg)	100	
SC30020	730573100042	Quick Clip™ U-Bracket	2.875" (73 mm)	3.2" (81.2 mm)	2" (50.8 mm)	0.25 lbs (0.11 kg)	100	Heat treated galvanized steel
SC30030	730573100059	Quick Clip™ U-Bracket			3" (76.2 mm)	0.30 lbs (0.14 kg)	100	
SC30040	730573100066	Quick Clip™ U-Bracket			4" (101.6 mm)	0.35 lbs (0.16 kg)	100	
SC20H	730573100103	Quick Clip™ Z-Bracket	All	All	2" (50.8 mm)	0.13 lbs (0.06 kg)	100	Galvanized steel
SC30H	730573100110	Quick Clip™ Z-Bracket			3" (76.2 mm)	0.15 lbs (0.07 kg)	100	
SC40H	730573100127	Quick Clip™ Z-Bracket			4" (101.6 mm)	0.14 lbs (0.06 kg)	100	
SC50H	730573952238	Quick Clip™ Z-Bracket			5" (127 mm)	0.18 lbs (0.08 kg)	100	
SC60H	730573952245	Quick Clip™ Z-Bracket			6" (152.4 mm)	0.20 lbs (0.10 kg)	100	
SB2020	730573100257	Quick Clip™ Fastener (2" x 2" staple)	All	All	2" (50.8 mm) to 4" (101.6 mm)	0.04 lbs (0.02 kg)	100	Galvanized steel
SB2040	730573952221	Quick Clip™ Fastener (2"x 4" staple)	All	All	5" (127 mm) to 6" (152.4 mm)	0.07 lbs (0.03 kg)	100	Galvanized steel
SA375	730573100264	Quick Clip™ Spiral Screw	All	All	All	0.02 lbs (0.01 kg)	1000	Galvanized steel

 $<sup>\</sup>ensuremath{^{\star}}$  For single extrusion mullions only



TEST STANDARDS: ASTM E1233, ASTM E2307







