




PREMIUM GRADE

# Intumescent Firestop Sealant

SpecSeal® SSS Premium Grade Intumescent Firestop Sealant is a premium grade water-based intumescent firestop sealant's formula specifically addresses the firestopping challenges facing the healthcare and industrial markets. SpecSeal SSS Sealant incorporates our proprietary two-stage intumescent technology that begins expanding and sealing at 230F and continues until 1000F. Two-stage intumescence ensures that protection starts earlier, lasts longer, and reinforces the closing of passageways for smoke and fire as conditions worsen. SSS Sealant can provide up to a 4-hour fire resistance rating when tested to ASTM E814/UL 1479, making it the superior choice for any combustible or non-combustible penetrants. SSS Intumescent Firestop Sealant's rugged formula resists cracking, aging, and degradation under thermal expansion, vibration, and movement bonding effectively to concrete, metal, plastics, and other industrial substrates.

## Features & Benefits

- Begins expanding and sealing at 230°F
- Patented two-stage intumescent technology ensures earlier, longer protection
- Easily works into tight spaces between penetrants
- FBC System Compatible and CPVC-Safe
- Used in over 500 through-penetration UL Tested Systems

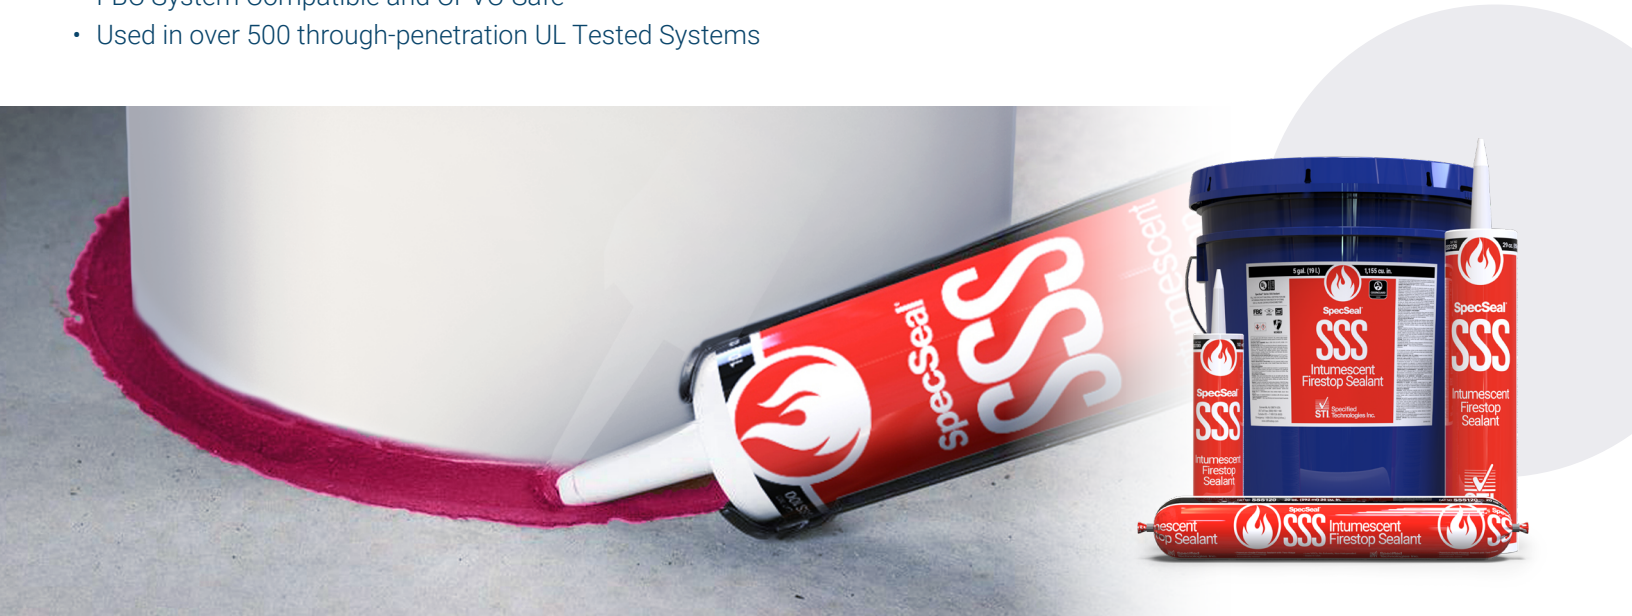

## ORDERING INFORMATION

Catalog Number	UPC Number	Size	(UOM) Qty.	Case Qty.	Weight (Each)
SSS100	730573011003	10.1 oz. Tube (300 ml) 18.2 cu.in.	1	12	1.07 lbs (0.49 kg)
SSS129	730573011294	29 oz. Tube (858 ml) 52 cu. in.	1	12	2.84 lbs (1.29 kg)
SSS120	730573011034	20 oz. Sausage (592 ml) 36 cu. in.	1	12	1.86 lbs (0.84 kg)
SSS105	730573011058	5 Gal. Pail (19.0 liters) 1,155 cu.in.	1	N/A	62.45 lbs (28.33 kg)



TEST STANDARDS: ASTM E814 (UL 1479), CAN/ULC-S115

 Red Color

 Permanent Solution

