


Electrical

Data Comm



Firestop Solutions

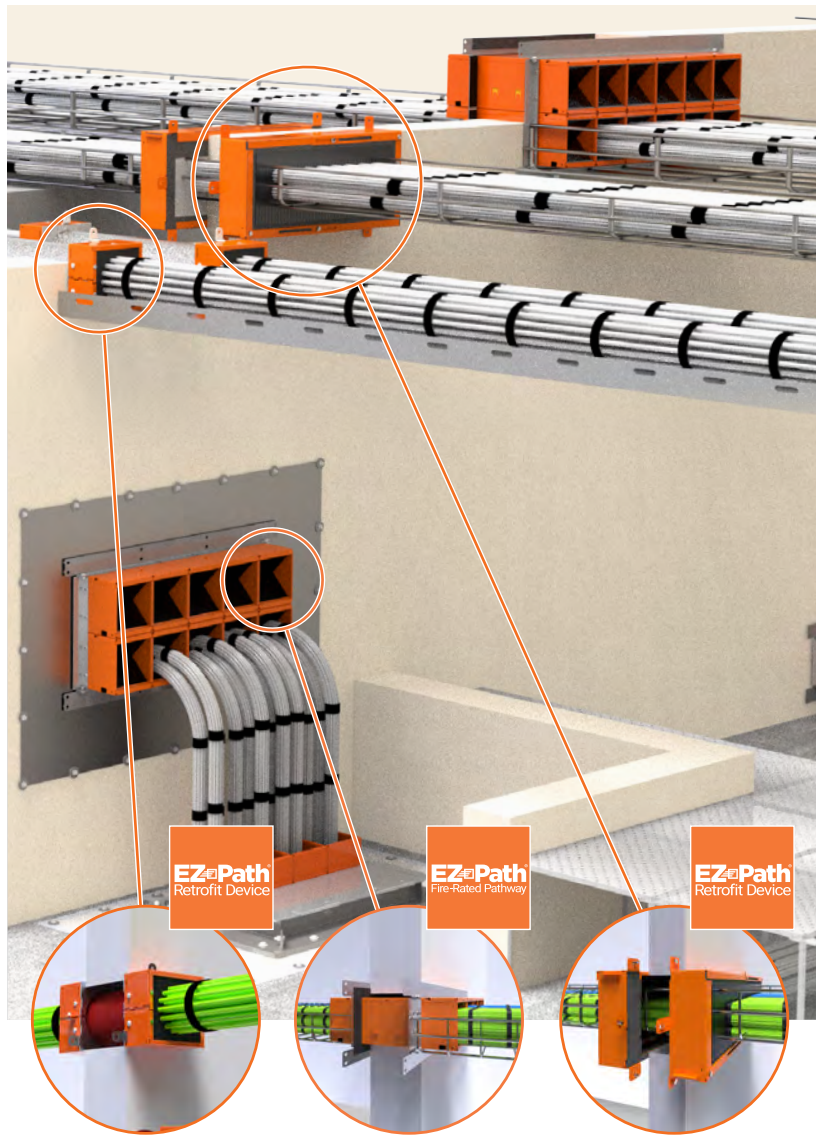

**Specified
Technologies Inc.**
We engineer peace of mind.

Find firestop solutions

Electrical Solutions

- ▶ **Electrical Solutions Overview** 6-7
- Conduit Penetrations**
 - ▶ SpecSeal® LCI Intumescent Firestop Sealant 8
 - ▶ SpecSeal® FP Intumescent Firestop Plugs 8
 - ▶ SpecSeal® SIL Silicone Sealant 9
 - ▶ SpecSeal® SSP Putty 9
- Outlet & Box Protection**
 - ▶ SpecSeal® EP Powershield™ Electrical Box Insert 10
 - ▶ SpecSeal® SSP Putty & Putty Pads 10
 - ▶ E-Wrap™ Endothermic Wrap 11
- Cable Tray / Busway**
 - ▶ SpecSeal® SSB Intumescent Firestop Pillows 12
 - ▶ SpecSeal® SBR Intumescent Firestop Blocks 12
 - ▶ SpecSeal® CS Composite Sheet 13
 - ▶ SpecSeal® SSM Firestop Mortar 13
 - ▶ SpecSeal® CS Cable Spray 14
- Wood Frame**
 - ▶ SpecSeal® WF Firestop Caulk 15

Data Communication Solutions

- ▶ **Solutions Overview** 16-17
- ▶ EZ Path® Fire-Rated Pathway 44+ 18-20
- ▶ EZ Path® Fire-Rated Pathway 33 21-22
- ▶ EZ Path® Fire-Rated Pathway 22 23
- ▶ EZ-Firestop® Grommets 23
- ▶ EZ Path® Smoke & Acoustical Pathway 24-25
- ▶ EZ Path® Retrofit Devices 26-27
- ▶ SpecSeal® CID Cast-In Firestop Device 28
- ▶ SpecSeal® Ready® Sleeve 29
- ▶ SpecSeal® Ready® Split Sleeve 29
- ▶ SpecSeal® FP Intumescent Firestop Plugs 30
- ▶ SpecSeal® SSP Putty 30
- ▶ SpecSeal® SSB Firestop Pillows 31
- ▶ SpecSeal® CS Composite Sheet 31



Putting solutions and resources to work for you

For 30 years, Specified Technologies Inc. has worked closely with the construction industry to create simple solutions to complex firestopping problems across a broad range of market segments and industries worldwide.

We offer the most comprehensive range of firestop products on the market and back them with the most UL® tested systems in the business—over 1,400—from penetration firestop systems and perimeter containment solutions to static and dynamic construction joints.

Because firestopping is our exclusive focus, we have been at the forefront of developing the most advanced and cost-effective firestop solutions

on the market. STI Firestop is committed to supporting customers by providing sustainable firestop solutions, treating them like partners, and by consistently adding value beyond the sale.


You can depend on STI to provide expert advice, superior performance, premium quality products, best-in-class service, and training and support while delivering a total firestop solution.

FBC™ System Compatible indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold® BlazeMaster® and Corzan® piping systems and products made with TempRite® Technology. The FBC System Compatible Logo, FBC™, FlowGuard Gold®, BlazeMaster®, Corzan®, and TempRite® are trademarks of Lubrizol Advanced Materials, Inc. or its affiliates. IMPORTANT NOTICE: ALL STATEMENTS, TECHNICAL INFORMATION, AND RECOMMENDATIONS CONTAINED HEREIN ARE BASED UPON TESTING BELIEVED TO BE RELIABLE, BUT THE ACCURACY AND COMPLETENESS THEREOF IS NOT GUARANTEED. STI TYPICALLY WARRANTIES ITS PRODUCTS FOR ONE FULL YEAR. FOR COMPLETE DETAILS OF OUR STANDARD WARRANTY, PLEASE VISIT WWW.STIFIRESTOP.COM/LEGAL/WARRANTY MADE IN THE USA - © 2022 SPECIFIED TECHNOLOGIES INC.



digital resources

ACCESS

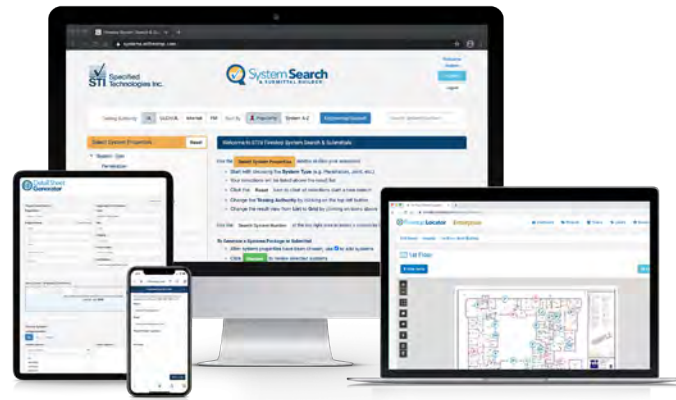


STI provides a toolbox of innovative online programs to remove the complexity of designing firestop systems. A set of powerful tools assure that the right systems are selected for the fastest and most cost-effective installation.



Create your own project specifications.

Guide Specifications are products or solutions for common Firestop issues. Easily editable Word format for use in the creation of project specifications. Each Guide Spec includes only language and firestop products relevant to that division and can be used as is or as additional language to include in an existing specification.

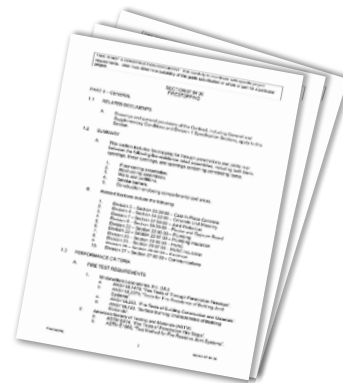


Find firestop systems on your phone, tablet, or the web.

- Find firestop systems on your phone, tablet, or the web
- Streamlined firestop system submittal package
- Integrate user documents and company logos
- Embed engineering documents from TRAM



The largest resource of firestop experts in the industry under one roof.

- Engineering judgments
- Custom firestop training
- Project plan review
- Documentation for AHJ's
- Technical inquiries & LEED letters
- Specification review
- Building Information Modeling (BIM)
- Upfront detail sheet generation

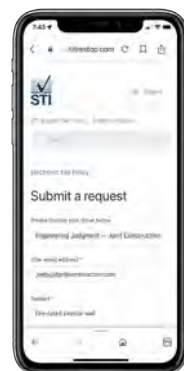

Streamline your firestop tracking process.

Construction documentation requirements have exploded. Whether reports are necessary to fulfill contract obligations or data is being used internally for quality control and management purposes, tracking and reporting methods are essential. Firestop Locator provides a method to simplify firestop documentation.

- Interactive floor drawings
- Track penetrations, joints, doors, dampers
- Add team members to any project
- Turn-key solution with pre-printed QR labels
- Generate detailed reports (PDF and Excel®)




Learn the basics about firestopping.

Login to the Firestop University to access our online learning materials. Access to the University will allow you to receive instant notifications with new course information. Join over 5,000 others and stay up to date with the latest courses offered by STI.




Generate a customized LEED® Credit Letter for submission in any project.

Generate a customized LEED® Credit Letter for submission in any project.

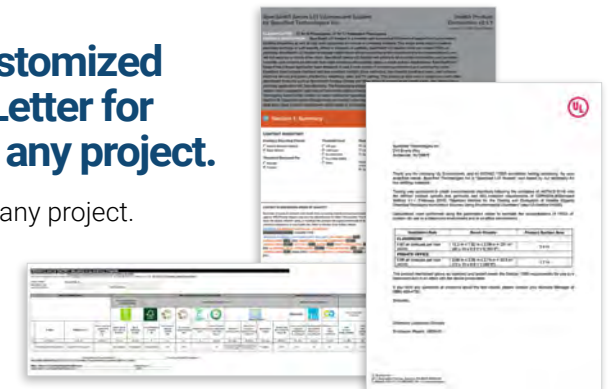

Generate a selection of firestop system details on a CAD detail sheet.

Generate a selection of firestop system details on a CAD detail sheet.

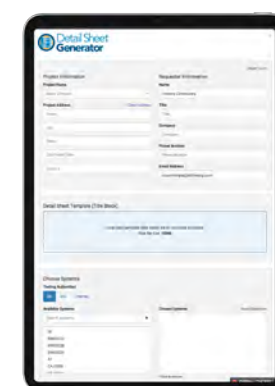

electrical applications

SpecSeal
LCI Intumescent
Sealant



SpecSeal
SBR Intumescent
Firestop Blocks



SpecSeal
SSB Intumescent
Firestop Pillows



E-Wrap®
Endothermic Wrap
EW



SpecSeal
SSP Putty Pads



PowerShield®
Electrical Box Insert
EP










conduit penetrations

SpecSeal® LCI Intumescent Sealant

SpecSeal® LCI Firestop Sealant is a water-based intumescent sealant intended for a wide range of penetrations and construction joint applications. SpecSeal® LCI Sealant has excellent caulking properties making it easy to apply in vertical applications as well as overhead.

- Gun Grade material available in caulk tubes, sausages and pails
- Tested for penetrations & construction joint configurations
- Compatible with CPVC Piping
- Can be sanded & painted to match its surroundings



ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	
LCI300	730573011706	Intumescent Sealant 10.1 Oz. Tube - 18.2 cu. in. (300 ml)	1	12	
LCI305	730573011751	Intumescent Sealant 5 Gallon Pail - 1,155 cu. in. (19 liters)	1	1	
LCI320	730573011720	Intumescent Sealant 20 Oz. Sausage - 36 cu. in. (592 ml)	1	12	
LCI329	730573011799	Intumescent Sealant 29 Oz. Tube - 52.3 cu. in. (858 ml)	1	12	
TEST STANDARDS: ASTM E814 (UL 1479), ASTM E1966 (UL 2079), CAN/ULC S115					
 Light Red Color  Permanent Solution  ACOUSTICAL STC 62 (Relates to specific construction)  UL CERTIFIED  FM APPROVED  FBC SYSTEM COMPATIBLE  Intertek					









conduit penetrations

SpecSeal® SIL Silicone Sealant

SpecSeal® SIL300 Silicone Sealant is a high performance silicone firestop sealant tested to resist the passage of smoke, flame and water through construction joints and penetrations. SIL300 Sealant cures to form a flexible seal and carries a Class 1 W Rating for water tightness (Per ANSI/UL1479).

- Available in a Gun Grade or Self Leveling
- Ozone and UV Resistant
- Excellent recovery from joint extension and compression
- Listed in over 175 UL® Tested Systems










ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	
SIL300	730573013106	10.1 oz Tube (300 ml) 18.2 cu. in.	1	24	
SIL305	730573013052	4.5 Gal. Pail (17.0 liters) 1,037 cu. in.	1	1	
SIL320	730573013205	20 oz. Sausage Tube (592 ml) 36 cu. in.	1	12	
SIL305SL	730573013267	Self-leveling 4.5 Gal. Pail (17.0 liters) 1,037 cu. in.	1	1	
SIL320SL	730573013229	Self-leveling 20 oz. Sausage Tube (592 ml) 36 cu. in.	1	12	
TEST STANDARDS: ASTM E814 (UL 1479), ASTM E1966 (UL 2079), CAN/ULC S115					
 Limestone & Gray Color  Permanent Solution  ACOUSTICAL STC 61 (Relates to specific construction)  MOVEMENT ±35% Maximum Movement Capability  UL CERTIFIED  FM APPROVED  FBC SYSTEM COMPATIBLE  Intertek					

SpecSeal® FP Intumescent Firestop Plug

SpecSeal® FP Intumescent Firestop Plugs are easy to install, creating a robust seal against fire and smoke. Firestop plugs make an excellent solution for temporary installation overnight, as well as permanent long-term seals for blank openings, and cable penetrations through common construction such as concrete or gypsum board. Sized to fit 2 in. and 4 in. diameter openings, firestop plugs make sealing conduit stubs and sleeves a breeze.

- Testing in Gypsum walls and concrete walls and floors
- Soft and easily compressed into conduit stubs and sleeves
- No expiration date
- Partners with other SpecSeal® Firestop Products









ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	
FP200	730573072029	Firestop Plug sized for 2 in. (51 mm) opening/sleeve	1	10	
FP400	730573072043	Firestop Plug sized for 4 in. (102 mm) opening/sleeve	1	10	
TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115					
 Red Color  Re-Enterable Solution  Permanent Solution  ACOUSTICAL STC 62 (Relates to specific construction)  UL CERTIFIED  FM APPROVED  Intertek					

SpecSeal® SSP Putty

SpecSeal® SSP Firestop Putty excels at sealing cabling penetrations and outlet boxes. SSP Putty is non-hardening and easily hand works around grouped cabling penetrations forming a re-enterable seal allowing for future work.

- Remains pliable and workable for the lifetime of the installation
- Acoustically tested
- Will not harden overtime



ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	
SSP100	730573021002	Firestop Putty 36 in³ (0.6 liter) bar	1	6	
SSP28	730573021019	Firestop Putty 24 in³ (0.4 liter) bar	1	1	
TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115, ASTM E119 (UL263)					
 Red Color  Re-Enterable Solution  ACOUSTICAL STC 62 (Relates to specific construction)  UL CERTIFIED  FM APPROVED  Intertek					

outlet & box protection

SpecSeal® EP Powershield® Electrical Box Insert

SpecSeal® EP Powershield® Electrical Box Inserts install within steel electrical boxes directly against the back of the box. Powershield® Box inserts are equally suited for remediation as well as preinstallation before the boxes have made it to the job site. Powershield® Box inserts incorporate pre-scored openings allowing for easy installation around ground lugs.

- Tested in boxes up to 4-1/2 in. x 14 in. x 2-1/2 in.
- Suitable for Steel and Plastic Face Plates
- Easily preinstalls before shipping to the jobsite
- No mess! Easy to apply!



ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
EP44	730573025000	3.75" x 3.75" x 1/8" (95 mm x 95 mm x 3 mm)	1	20
EP44-Bulk	730573025017	3.75" x 3.75" x 1/8" (95 mm x 95 mm x 3 mm) Bulk	N/A	600
EP45	730573025055	4.5" x 4.5" x 1/8" (114 mm x 114 mm x 3 mm)	1	20
EP45-Bulk	730573025062	4.5" x 4.5" x 1/8" (114 mm x 114 mm x 3 mm) Bulk	N/A	450
EP55	730573025550	4.75" x 4.75" x 1/8" (121 mm x 121 mm x 3 mm)	N/A	250

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115, ASTM E119 (UL263), ASTM E90

Red Color

Permanent Solution

ACOUSTICAL 64 (Relates to specific construction)

UL CERTIFIED

SpecSeal® SSP Putty Pads

SpecSeal® SSP Firestop Putty Pads excel at protecting outlet boxes. SSP Putty Pads are non-hardening and easily stick to external box surfaces.

- Available in preformed pads
- Remains pliable and workable for the lifetime of the installation
- Acoustically tested
- Will not harden overtime and fall off box

ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
SSP4S	730573021057	7.25" x 7.25" x 3/16" (184 x 184 x 4.8 mm) pad	1	20
SSP9S	730573021019	9.00" x 9.00" x 3/16" (229 x 229 x 4.8 mm) pad	1	20

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115, ASTM E119 (UL263), ASTM E90

Red Color

Re-Enterable Solution

ACOUSTICAL 62 (Relates to specific construction)

UL CERTIFIED

FM APPROVED

Intertek

outlet & box protection

E-Wrap® Endothermic Wrap

E-Wrap® Endothermic Wrap is a protective wrap designed for fire protection of critical circuits and infrastructure such as fire pumps, signaling equipment, elevators, alarms, process control equipment, or emergency responder communications enhancement systems (ERCES). E-Wrap® is also used for fuel oil pipe protection. When installed around Electrical Metallic Tubing (EMT), conduits, cable trays, or pipes, E-Wrap® releases chemically bound water to have a cooling effect providing up to 2 hours of circuit integrity ensuring continued operation under fire conditions.

- Flexible material – easy to install, even on small diameter conduits
- Tested with Electrical Metallic Tubing (EMT) and heavier conduits
- Fewer layers required for protection – better coverage per roll
- Endothermic – releases chemically bound water to have a cooling effect
- Weighs less than competing wraps
- May be used to achieve equal F&T Ratings on penetration firestop systems.
- Tested to ASTM E1725 for circuit integrity

ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
EW2420	730573350065	20' (6.1 m) L x 24" (610 mm) W x 0.50" (13 mm) T 40 Sq. Ft. (3.72 Sq. m.) Roll	1	1

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115, ASTM E1725, UL1489

Silver Color

UL CERTIFIED

ELECTRICAL SOLUTIONS

ELECTRICAL SOLUTIONS

10

11

cable tray / busway / multi opening

SpecSeal

SSB

Intumescent Firestop Pillows

SpecSeal® SSB Firestop Pillows easily compress and conform around any penetrant. Equally suited for new or existing conditions, SpecSeal® Pillows make short work of even the most complex through-penetration firestop conditions.

- Available in four different sizes
- Tested in a wide range of construction types and configurations
- Easily installs from a single side
- Re-enterable allowing for future work in previously sealed openings



ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
SSB14	730573061404	Firestop Pillows 1" x 4" x 9" (25 mm x 101 mm x 225 mm)	1	20
SSB24	730573062401	Firestop Pillows 2" x 4" x 9" (50 mm x 101 mm x 225 mm)	1	10
SSB26	730573062609	Firestop Pillows 2" x 6" x 9" (50 mm x 152 mm x 225 mm)	1	22
SSB36	730573063606	Firestop Pillows S3" x 6" x 9" (76 x mm 152 mm x 225 mm)	1	16

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115

Red Color

Re-Enterable Solution

ACOUSTICAL 60 (Relates to specific construction)

UL CERTIFIED

FM APPROVED


SpecSeal

SBR

Intumescent Firestop Blocks

SpecSeal® SBR Firestop Blocks are penetration firestop products resembling foam bricks. These intumescent urethane foam blocks are installed in openings by compressing and stacking into the opening in a brick-like fashion. The intumescent block expands in high temperatures to impede fire, smoke, and gas passage.

- Intumescent – expands in all directions for a tough, tight seal
- Reinstallable for easy retrofitting of various pipes, cables, and innerducts
- Lightweight for ease of installation
- Easier wire screen requirements for large openings and 2 hour ratings

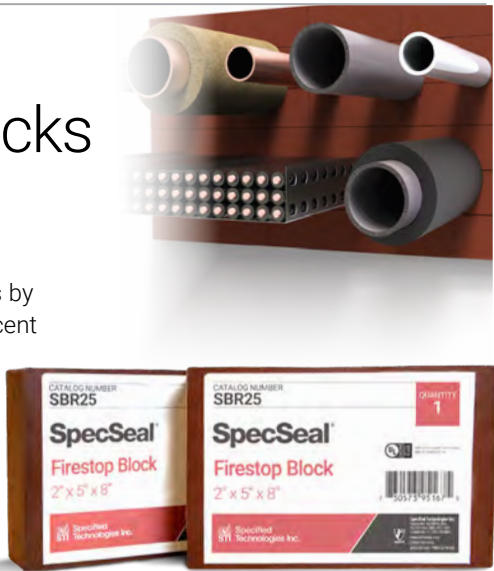

ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
SBR25	730573951675	SBR Intumescent Firestop Block 2" x 5" x 8"	1	24

TEST STANDARDS: ASTM E119 (UL263), ASTM E814 (UL1479), CAN/ULC-S115

Brick Red Color

Permanent Solution

ACOUSTICAL 60 (Relates to specific construction)

UL CERTIFIED

cable tray / busway / multi opening


SpecSeal

CS

Composite Sheet

SpecSeal® Composite Sheet is the ideal solution for large openings where a permanent seal is required. Composite sheets consist of thin sheet steel, intumescent material, wire mesh, and aluminum foil. Used in conjunction with other SpecSeal® Firestop Products to seal large openings.

- Professional Fit and Finish
- Used with other SpecSeal® Firestop Products
- Easily cut with common sheet metal tools
- Tested for up to 4 Hours of fire resistance when tested to ASTM E814 UL1479 and CAN/ULC-S115

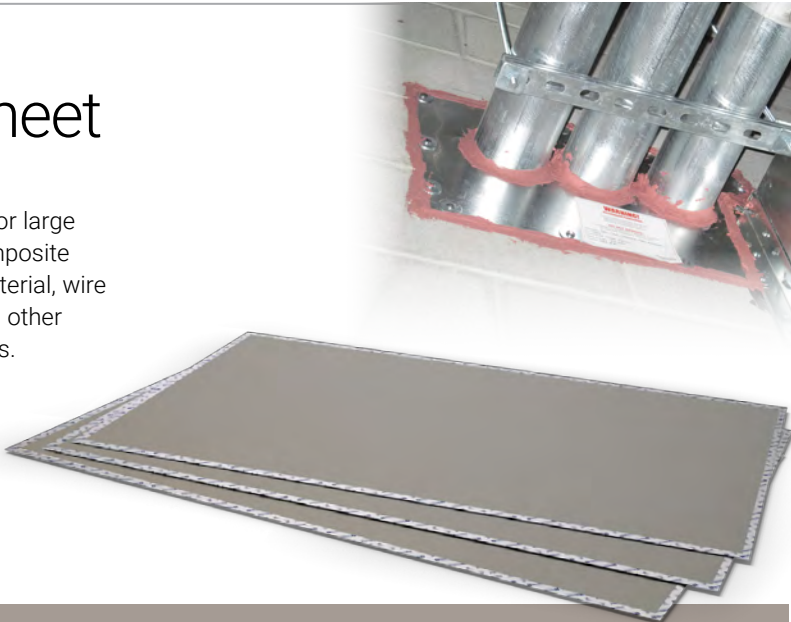

ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
CS1628	730573116289	Composite Sheet 16" by 28" (41 cm by 71 cm)	1	1
CS2436	730573124369	Composite Sheet 24" by 36" (61 cm by 92 cm)	1	1
CS3636	730573141366	Composite Sheet 36" by 36" (92 cm by 92 cm)	1	1
CS3641	730573136416	Composite Sheet 36" by 41" (92 cm by 104 cm)	1	1
CS2852	730573136362	Composite Sheet 28" by 52" (71 cm by 132 cm)	1	1

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115

Silver Color

Permanent Solution

UL CERTIFIED

FM APPROVED

SpecSeal

SSM

Firestop Mortar

SpecSeal® SSM Firestop Mortar is a lightweight, cost-effective solution for oversized openings in concrete walls and floors. Once mixed with water, SpecSeal® Mortar forms a lightweight, low density slurry that easily applies into concrete walls and floors. SpecSeal® Mortar cures quickly and will not split or crack due to freezing or changes in temperature.

- Can be poured, pumped, or troweled in place
- Partners with other SpecSeal® Firestop Products
- Durable permanent seal
- Re-penetrable allowing for future penetrants



ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Nom. Yield (Mixed)
SSM106	730573041062	Firestop Mortar 6 Gallon Pail	1	1	1,225 in³ (20.1 liters)
SSM22B	730573042007	Firestop Mortar Fiber Bag	1	1	1,325 in³ (21.7 liters)

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115

Pale Red Color

Permanent Solution

UL CERTIFIED

FM APPROVED

cable tray / busway / multi opening

SpecSeal

CS

Cable Spray

SpecSeal® Cable Spray applies quickly to grouped cables within cable trays, providing protection against cable jacketing ignition from direct fire exposure and slowing flame propagation. Cable Spray applies quickly with an airless spray rig, only requiring a minimum 1/8" wet applied thickness. Once cured, Cable Spray forms a flexible, water and weather resistance seal adhering to virtually all cable jacketing materials.

- Contains no inorganic fibers, asbestos, or solvents
- FM Approved to FM Approval Class: 3971
- Meets IEC 60331-21 & IEC 60332-3
- Passes IEEE 383/1202



ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
CS105	730573071045	5 Gallon Pail - 1,155 cu. in. (19 liters)	1	1

TEST STANDARDS: FM3971, IEC 60331, IEC 60332

White Color

Permanent Solution

FM APPROVED

wood frame solutions

WF

Intumescent Firestop Caulk

WF300 Intumescent Firestop Caulk is a latex-based firestop caulk designed for residential wood frame construction. WF300 Caulk is tested for addressing penetrations through wood/frame construction such as wood stud walls and floor/ceiling assemblies. Under fire exposure, WF300 expands to up to four times its original volume.

- Installer friendly, easily applies with standard caulking gun
- Suitable for combustible and non-combustible penetrants
- Tested for up to 3 Hours of fire exposure when tested to ASTM E814/UL1479



ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
WF310	730573097106	Intumescent Firestop Caulk 10.1 Oz. Tube - 18.2 cu. in. (300 ml)	1	12
WF320	730573097205	Intumescent Firestop Caulk 20 Oz. Sausage - 36 cu. in. (592 ml)	1	12
WF305	730573097052	Intumescent Firestop Caulk 5 Gallon Pail - 1,155 cu. in. (19.0 liters)	1	N/A

TEST STANDARDS: ASTM E814 (UL1479), ASTM E1966 (UL2079), CAN/ULC-S115

Deep Red Color

Permanent Solution

ACOUSTICAL STC 61 (Relates to specific construction)

CERTIFIED

FBC SYSTEM COMPATIBLE



data comm applications



0-100% cable fill
Self sealing & always compliant




Smoke & acoustical devices
For non-fire-rated walls



Grommets
For single-cable applications




High-density solutions
For space-saving horizontal applications



Retrofit Devices
For non-compliant sleeves & cable trays




High-density solutions
For space-saving vertical applications



Smaller footprint
Greater cable capacity than traditional methods



Extensions
For use with thicker walls

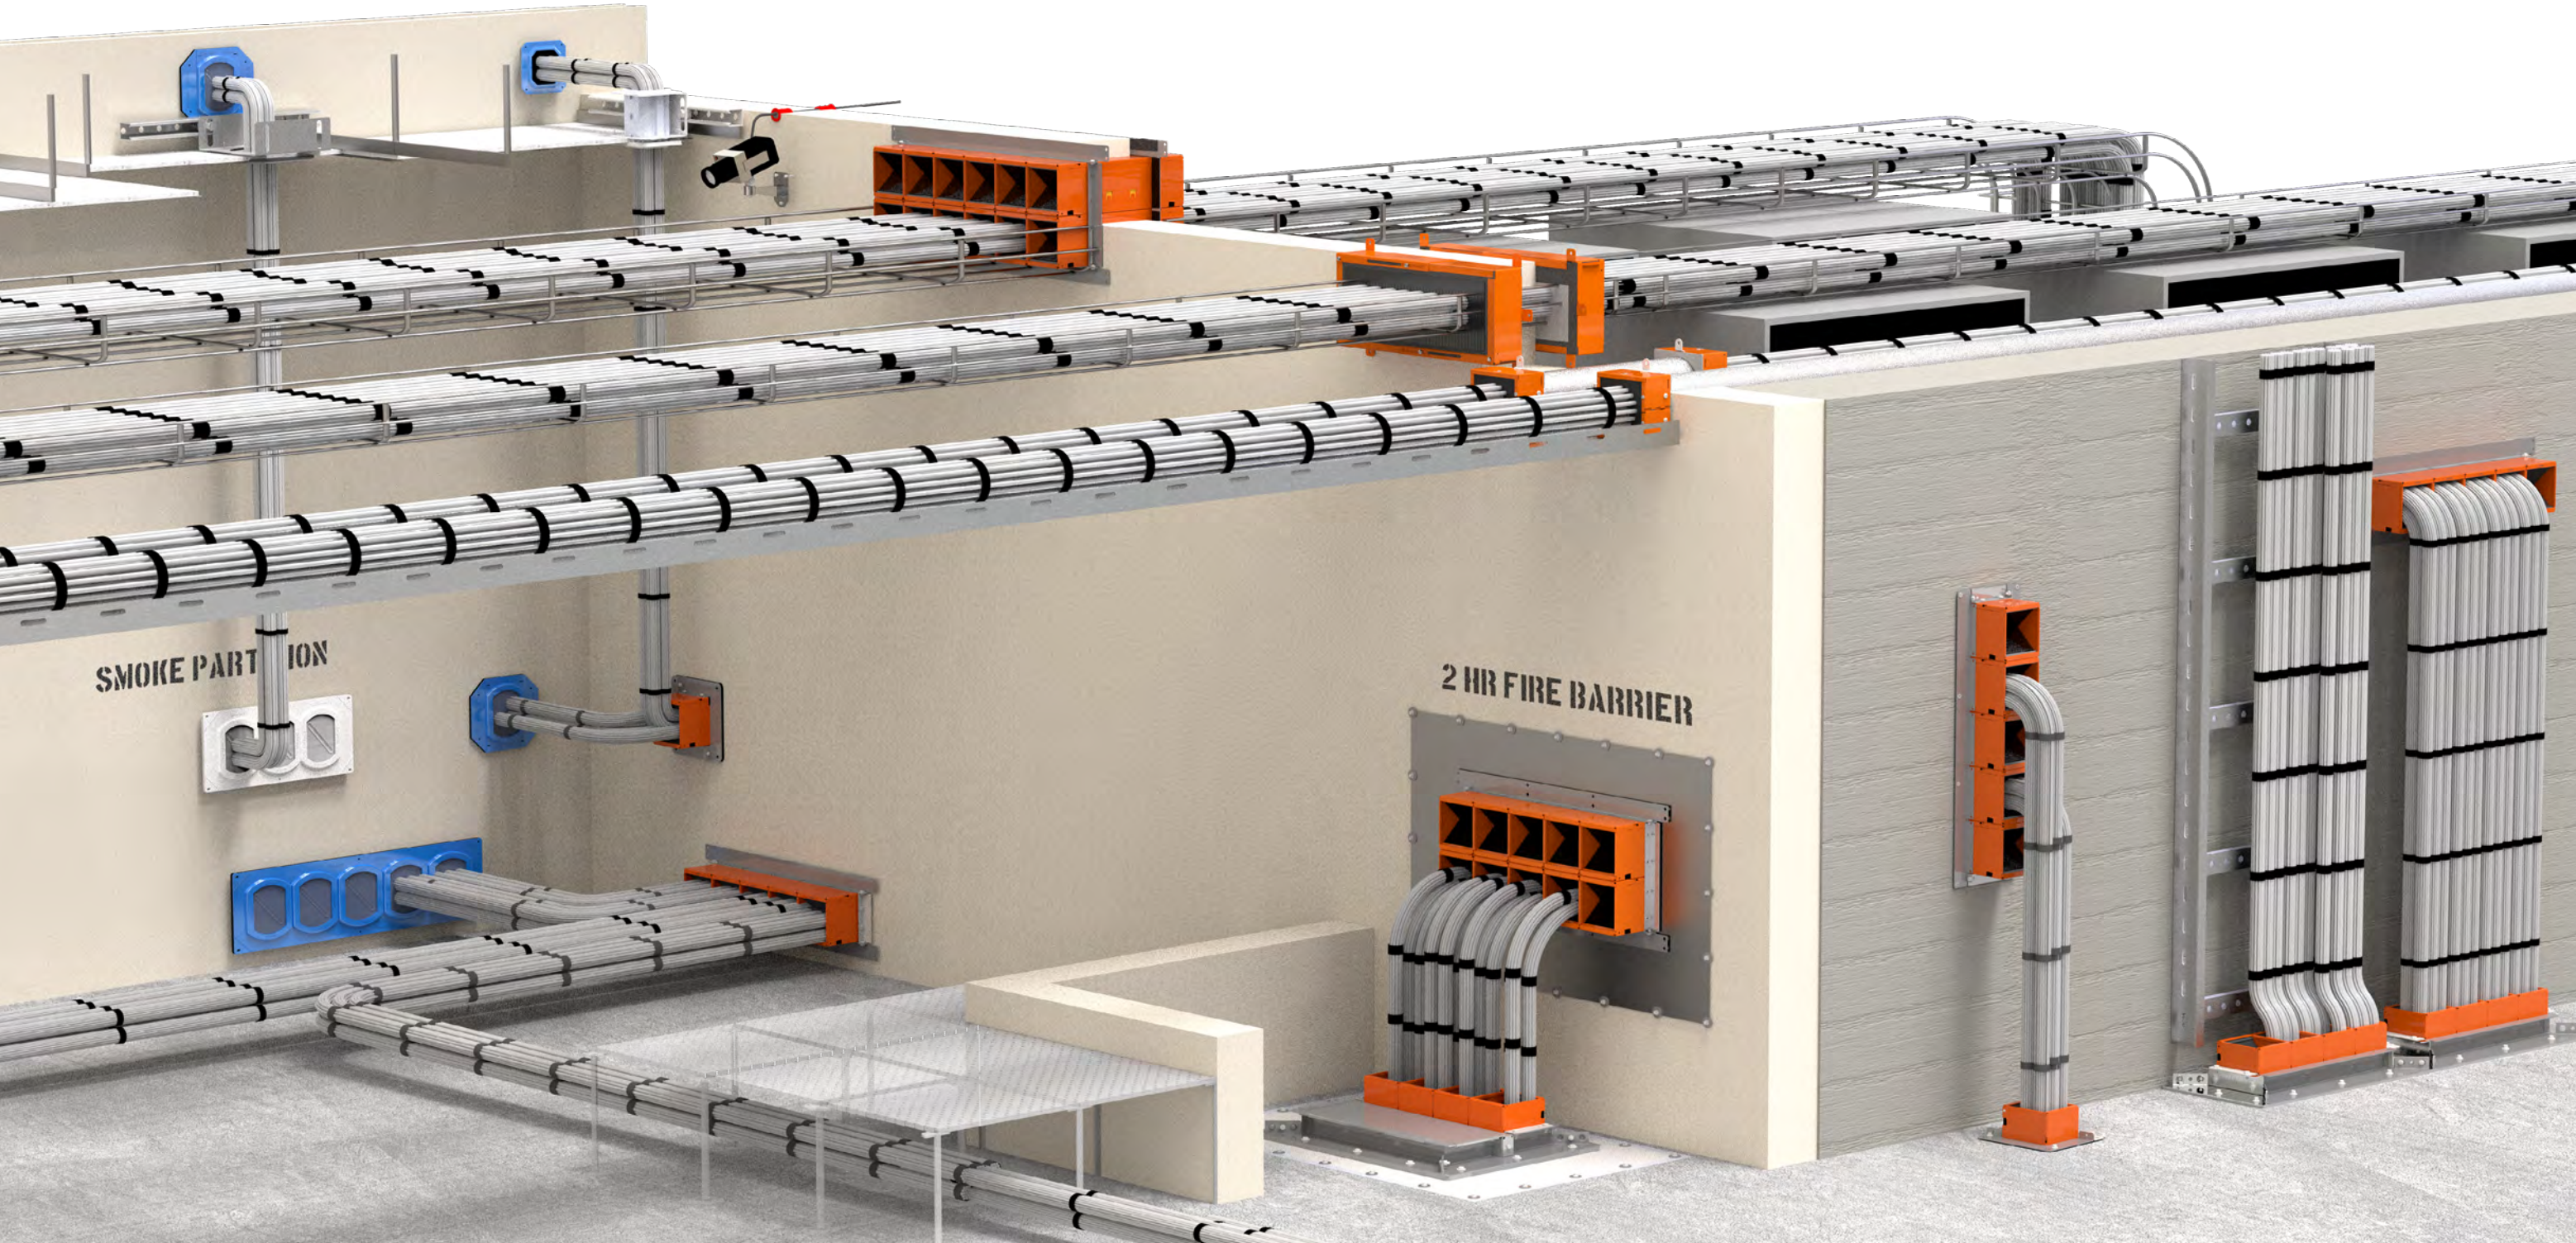

high cable volume















Series 44+ Fire-Rated Pathway

The EZ Path® Series 44+ Fire-Rated Pathway is a maintenance-free pathway solution designed for high cable volume conditions through fire-rated walls and floors. The Series 44+ incorporates self-sealing intumescent pads that automatically adjust to the installed cable fill without the need for user manipulation. Under fire exposure, the intumescent pads expand and swell, resisting the passage of smoke and flame.

Features & Benefits:

- Self Sealing design provides exceptional fire and smoke leakage ratings
- Allows for easy moves, adds, and changes
- Designed for new and existing conditions
- Variety of accessories available for any field condition
- Modular grid system for riser applications
- Greatest achievable cable density of any solution on the market




Horizontal Cable Solutions			ORDERING INFORMATION			
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device	
EZD44S2	730573001004	Fire-Rated Pathway Device	1	4	<div>EZD44S2</div> 	
Single Pathway Installation Through Walls						
EZDP44S2	730573001066	Fire-Rated Pathway Kit – Device with wall plates and labels	1	1	<div>EZDP44S2 Full kit</div>  <div>EZP144W Without pathway</div> 	
EZP144W	730573001448	Single Wall Plates and Labels	1	1		
Single Pathway Installation Through Walls With Existing Cables						
EZDP144RS2	730573001073	Split Wall Plate – Device with split wall plate and labels	1	1	<div>EZDP144RS2 Full kit</div>  <div>EZP144RS Without pathway</div> 	
EZP144RS	730573001486	Split Wall Plate – Plate only	1	1		
Multi-Gang Plates						
EZP544W	730573005446	Multi-gang wall plate brackets for 1-5 devices. Devices not included.	1	8	<div>EZP544W</div> 	
EZP544WD	730573005460	Multi-gang wall plate brackets for 2-10 devices. Devices not included.	1	8	<div>EZP544WD</div>  	
EZP644W	730573006481	Multi-gang wall plate brackets for 6 devices. Devices not included.	1	8	<div>EZP644W</div>  	
EZP644WD	730573006573	Multi-gang wall plate brackets for 12 devices. Devices not included.	1	8	<div>EZP644WD</div>  	
EZP544WV	730573005477	Vertical Multi-Gang Wall Bracket Kit for 1-5 devices. Devices not included.	1	1	<div>EZP544WV</div>  	

high cable volume

Series 44+ Fire-Rated Pathway



Vertical Cable Solutions



Single Pathway Installation Through Floors			ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device		
EZDP144FKS2	730573001080	Floor Kit – Device with floor plate	1	1	EZDP144FKS2 Full kit		
EZP144F	730573008348	Split Floor Plate – Plate only	1	1		EZP144F Without pathway	

Accessories




Extension Module		ORDERING INFORMATION			
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device
EZD44ES	730573000694	6" Extension Module – use with Series 44+ pathway ONLY	1	1	EZD44ES 
Radius Control Extension Module					
EZRCM44S	730573009345	Radius Control Module – one pair (2) for use with Series 44+ pathway ONLY	1	1	EZRCM44S 



high cable volume




Series 44+ Fire-Rated Pathway Modular Floor Grid System

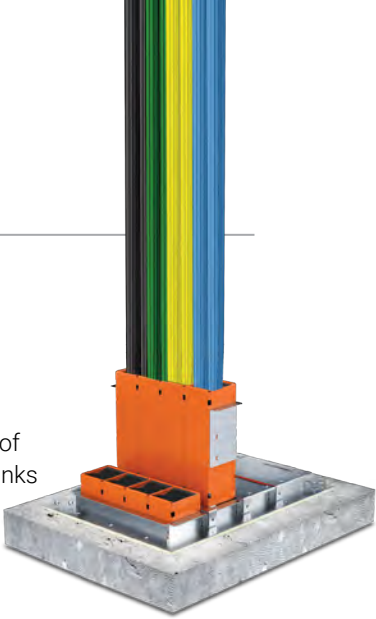Modular Floor Grid Systems utilize the high volume, EZ Path® Series 44+ pathways, installed in banks of four, to provide your cabling systems with room to grow. Sturdy steel grids mount one, two, or four banks of pathways in built-in slots for a total of up to sixteen pathways through a single floor opening. A single bank floor grid comes complete with pathways. Multi-bank modular floor grids are installed with firestop panels sealing each slot. As additional cable capacity is required, firestop panels are removed, and pathway modules containing four pathways are installed in each slot.



Cable Riser Solutions		ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device	
EZDG444S2	730573001103	Single Bank Floor Grid – Four (4) Devices with floor frame	1	1	 EZDG444S2 Full kit	 EZG444 Without pathway
EZG444	730573001004	Floor Frame Only	1	1		
Two-Slot Modular Floor Grid						
EZDG844S2	730573001110	Dual-slot Frame Kit with 8 Pathways –(Includes eight (8) Series 44+ devices with EZG844)	1	1	 EZDG844S2 Full kit	 EZG844 Without pathway
EZG844	730573008447	Dual-Slot Frame for Eight (8) Pathways	1	1		
Four-Slot Modular Floor Grid						
EZDG1644S2	730573001127	Quad-slot Frame Kit with 16 Pathways – (Includes sixteen (16) Series 44+ devices with EZG1644)	1	1	 EZDG1644S2 Full kit	 EZG164 Without pathway
EZG1644	730573006443	Multi-Slot Frame for Sixteen (16) Pathways	1	1		
Splice Plate Kit						
EZG444CP	730573004494	Floor Grid Splice Plate Kit – includes plate and gasket	1	1		

Accessories

Hanger Bracket		ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device		
EZP444MB	730573004487	Hanger Bracket for Modular Floor Grid System	1	1	EZP444MB		
Pathway Module							
EZD444MBS2	730573001097	Single Bank of Devices – Four (4) Devices with hanger bracket	1	1	EZD444MBS2		
T-Rating Kit							
TRK444	730573004463	T-Rating Kit	1	2	TRK444		

moderate cable volume






Series 33 Fire-Rated Pathway

The EZ Path® Series 33 Fire-Rated Pathway is a maintenance-free pathway solution for moderate cable volumes through fire-rated walls and floors. The Series 33 incorporates built-in intumescent pads that automatically adjust to cable fills. When exposed to flame and high temperatures, the intumescent pads expand to form a dense insulative char that prevents the passage of smoke and flame.

Features & Benefits:

- Self Sealing design provides exceptional fire and smoke leakage ratings
- Allows for easy moves, adds, and changes
- Designed for new and existing conditions
- Variety of accessories available for any field condition
- Available in an array of colors for easy cable pathway management



Single Device		ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device		
EZD33FWS	730573000045	Fire-Rated Pathway Device	1	6	<div>EZD33FWS</div> 		
Single Pathway Square Plate Kit							
EZDP33FWS	730573000342	Square Plate Kit – Device with square wall plates and labels	1	4	<div>EZDP33FWS Full kit</div>  <div>EZP133W Without pathway</div> 		
EZP133W	730573001332	Square Wall Plates with labels	1	1			
Single Pathway Circular Plate Kit							
EZDP133CWK	730573000359	Circular Plate Kit – Device with circular wall plates and labels	1	1	<div>EZDP133CWK Full kit</div>  <div>EZP133CW Without pathway</div> 		
EZP133CW	730573001370	Circular Wall Plates with labels	1	1			

Multi-Gang Plates





Two Gang		ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device	
EZDP233GK	730573002353	Two-Gang Kit – Two (2) devices with two-gang plates and labels	1	1	 EZDP233GK Full kit	 EZP233W Without pathway
EZP233W	730573002339	Two-Gang Wall Plates with labels	1	1		
Three Gang						
EZDP333GK	730573903353	Three-Gang Kit – Three (3) devices with three-gang plates and labels	1	1	 EZDP333GK Full kit	 EZP333W Without pathway
EZP333W	730573003336	Three-Gang Wall Plates and labels	1	1		

moderate cable volume



Series 33 Fire-Rated Pathway

Multi-Gang Plates continued







Four Gang		ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device	
EZDP433GK	730573004357	Four-Gang Kit – Four (4) devices with four-gang plates and labels	1	1	 EZDP433GK Full kit	 EZP433W Without pathway
EZP433W	730573004333	Four-Gang Wall Plates and labels	1	1		
Seven Gang						
EZDP733GK	730573007358	Seven-Gang Kit – Seven (7) devices with seven-gang plates and labels	1	1	 EZDP733GK Full kit	 EZP733W Without pathway
EZP733W	730573007334	Seven-Gang Wall Plates and labels	1	1		



Vertical Cable Solutions

New Cable Installations Through Floors					ORDERING INFORMATION	
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device	
EZDP133FK	730573008355	Kick In Floor Plate Kit – Device with ring plate	1	1	 EZDP133FK Full kit	 EZP133K Without pathway
EZP133K	730573008331	Kick-In Split Floor Plate	1	6		

Retrofit Solutions

Conduit Attachment					ORDERING INFORMATION	
EZDP133CAK	730573000366	Conduit Attachment Kit-Device with conduit attachment plate and label	1	1	 EZDP133CAK Full kit	 EZP133CA Without pathway
EZP133CA	730573001387	Conduit Attachment Plate with label	1	1		
Retro-Fit						
EZDP33WR	730573005330	Retro-Fit Kit –Device with retro-fit wall mounting plates and labels	1	1	 EZDP33WR Full kit	 EZP133R Without pathway
EZP133R	730573005354	Retro-Fit Mounting Plates with labels	1	1		

Accessories

Extension Module					ORDERING INFORMATION	
EZD33E	730573000052	Extension Module	1	1		
Radius Control Module						
RCM33	730573009338	One Pair (2) Radius Control Modules	1	1		

low cable volume


Series 22 Fire-Rated Pathway

The **EZ Path® Series 22 Fire-Rated Pathway** is a maintenance-free pathway solution for smaller cable bundles through fire-rated wall assemblies. The device is offered as a complete kit without the need for additional accessory products for installation.

Features & Benefits:

- Self Sealing design provides exceptional fire and smoke leakage ratings
- Allows for easy moves, adds, and changes
- Designed for new and existing conditions
- Suited for round and rectangular openings




Single Device					ORDERING INFORMATION	
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device	
EZD22	730573000229	Device, full kit includes wall plates and labels	1	6	 EZD22	



EZ-Firestop® Grommet



EZ-Firestop® Grommets make sealing penetrations of individual and small bundles of cables through gypsum board walls a snap. Molded from premium plenum-plastics and incorporating a soft foam inner core, EZ-Firestop® Grommets eliminate the need for sleeves, firestop putties, and sealants.

Features & Benefits:

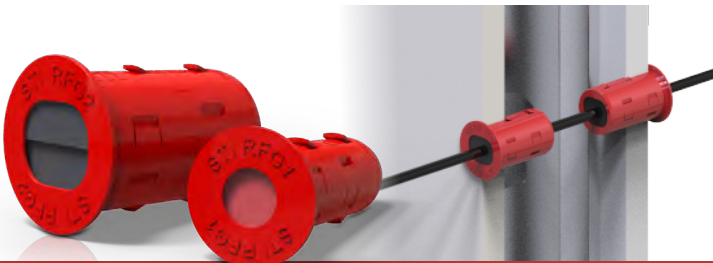- Suited for addressing single membrane or complete through-penetrations
- Available as a single cable or multiple cable solution
- Ideal for alarm, security, or wireless access point installations
- Designed for 1 & 2 hr fire-rated gypsum board wall assemblies
- Professional finished appearance




Firestop Grommets					ORDERING INFORMATION	
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device	
RFG1	730573250587	Two-piece split cable grommet for single cable penetrations up to 0.27" (7 mm) diameter	1 Pack 10 Grommets per pack	10 Packs	 RFG1	
RFG2	730573250594	Two-piece split cable grommet for single or multiple cable penetrations up to 0.53" (14 mm) diameter	1 Pack 10 Grommets per pack	10 Packs	 RFG2	

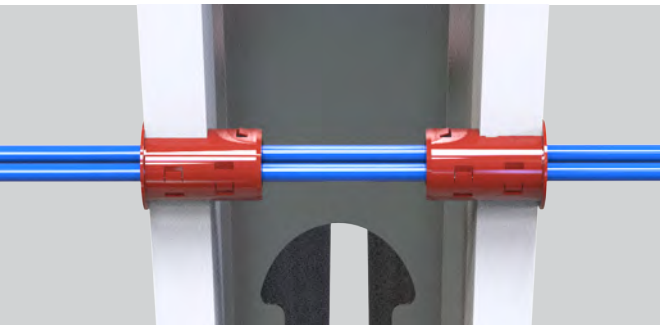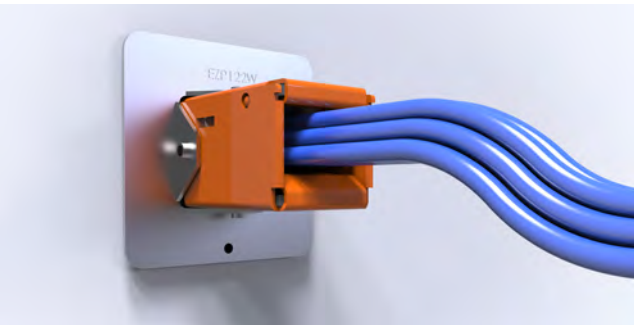


high
cable volume



Smoke & Acoustical Pathways

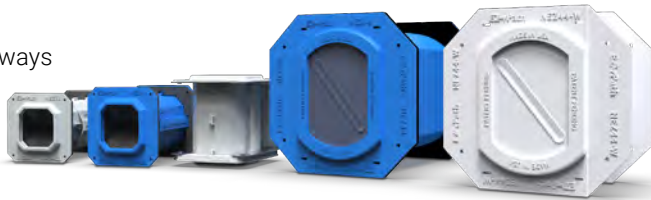
Designed for easy installation in non-fire-rated floor, ceilings, and walls, EZ Path® Series 33NEZ & 44NEZ Smoke & Acoustical Pathways provide exceptional smoke sealing and acoustical performance with tested and approved cable capacities ranging from 0 up to 100% visual fill.

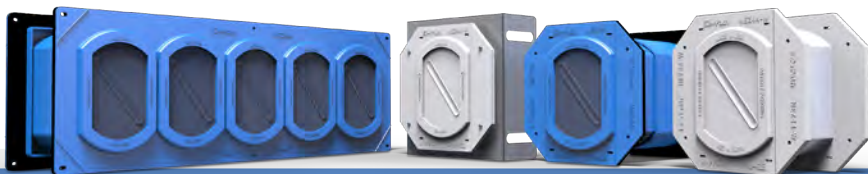

Series 44NEZ





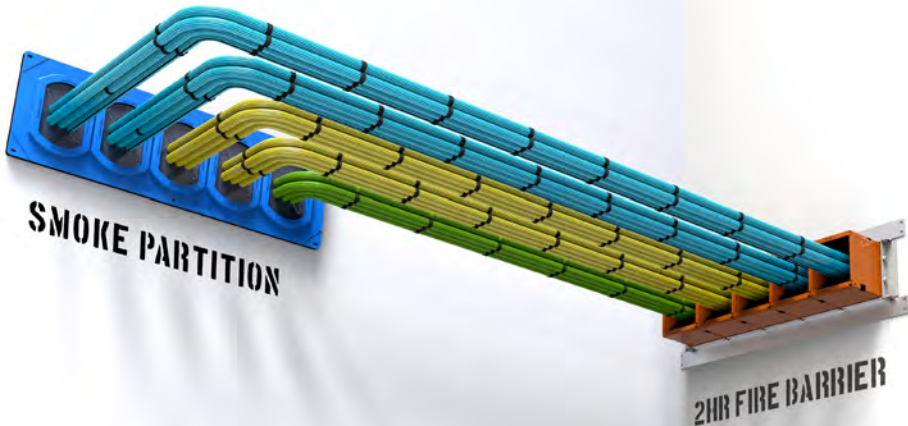


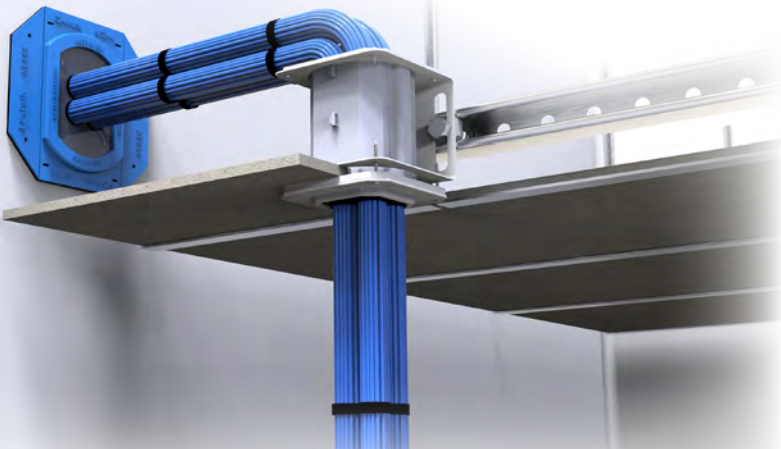
Horizontal Solutions					ORDERING INFORMATION	
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device	
NEZ44	730573111727	Smoke and Acoustical Pathway (Blue)	1	4		
NEZ44-W	730573111734	Smoke and Acoustical Pathway (White)	1	4		
3 & 5 Gang Devices						
NEZD344	730573111772	Smoke and Acoustical Pathway 3-Gang Kit (Blue) [16" (406mm) Wall Studs]	1	1		
NEZD344-W	730573111789	Smoke and Acoustical Pathway 3-Gang Kit (White) [16" (406mm) Wall Studs]	1	1		
NEZD544	730573111796	Smoke and Acoustical Pathway 5-Gang Kit (Blue) [24" (610mm) Wall Studs]	1	1		
NEZD544-W	730573111802	Smoke and Acoustical Pathway 5-Gang Kit (White) [24" (610mm) Wall Studs]	1	1		
Ceiling Tile Solutions						
NEZ44CK	730573111741	Smoke and Acoustical Pathway Ceiling Kit (White)	1	4		
NEZ344CK	730573111819	Smoke and Acoustical Pathway 3-Gang Ceiling Kit (White)	1	4		



moderate
cable volume

Series 33NEZ

Horizontal Solutions		ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device	
NEZ33	730573111581	Smoke and Acoustical Pathway, (Device Only) with hardware	1	4		
NEZ33-W	730573111666	Smoke and Acoustical Pathway White, (Device Only) with hardware	1	4		
2 & 4 Gang Devices						
NEZDP233	730573111598	Smoke and Acoustical Pathway, Two Gang Kit (2 NEZ33 Pathways & 2 NEZP233 Two Gang Plates)	1	N/A		
NEZDP433	730573111604	Smoke and Acoustical Pathway, Four Gang Kit (4 NEZ33 Pathways & 2 NEZP433 Four Gang Plates)	1	N/A		
NEZP233	730573111611	Smoke and Acoustical Pathway, Two Gang Plate Kit (Plates Only)	1	N/A		
NEZP433	730573111628	Smoke and Acoustical Pathway, Four Gang Plate Kit (Plates Only)	1	N/A		
Retrofit Device						
NEZ33R	730573111659	Smoke & Acoustical Pathway Retrofit Device	1	1		
Ceiling Tile Solutions						
NEZ33CK2	730573111680	Smoke and Acoustical Pathway White, (Device Only) with Ceiling Kit	1	1		




retrofit pathway


Retrofit Device

Non-compliant cable sleeves are the bane of every facilities team. Bring these deficient openings back into code compliance with the **EZ Path® Retrofit Device**. Its two-part clam shell design installs around projecting sleeves and cable bundles, restoring fire and smoke leakage performance. The EZ Path® Retrofit Device quickly and easily retrofits sleeves of up to 100% visual fill, restoring fire performance without the need for additional firestop products.

Features & Benefits:

- Sized for 2 in. and 4 in. metallic sleeves
- Designed for cable sleeves and stubs
- Professional fit and finish
- Safety Orange for easy identification
- Suited for round and rectangular openings

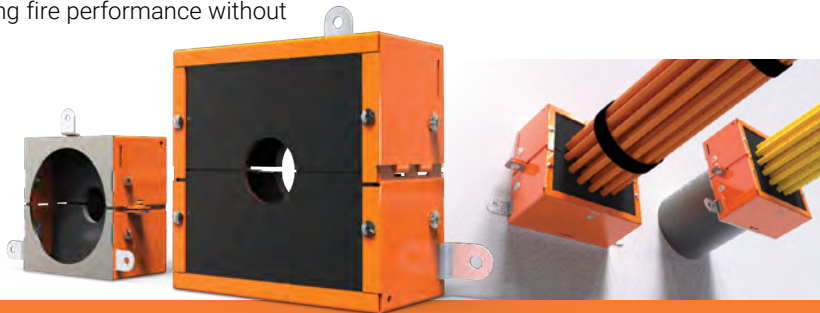

Single Device						ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device						
EZDR200	730573002001	Retrofit Device for 2" (2-3/16" or 2-3/8" O.D.) Sleeves, One Pair (2)	1	4	EZDR200						
EZDR400	730573004005	Retrofit Device for 4" (4-1/2" O.D.) Sleeves, One Pair (2)	1	4	EZDR400						
EZPR150	730573002018	1-1/2" Adapter Plate for EZDR200, One Pair (2)	1	1	EZPR150						
EZPR300	730573004012	3" Adapter Plate for EZDR400, One Pair (2)	1	1	EZPR300						




retrofit pathway








Cable Tray Retrofit Device

The **EZ Path® Cable Tray Retrofit Device** is designed for addressing non-compliant tray penetrations in fire-rated wall assemblies. Its split housing design installs around existing cable tray penetrations restoring fire-resistance ratings. The EZ-Path Cable Tray Retrofit Device quickly restores compliance to cable tray penetrations loaded with up to 100% visual fill of cables.

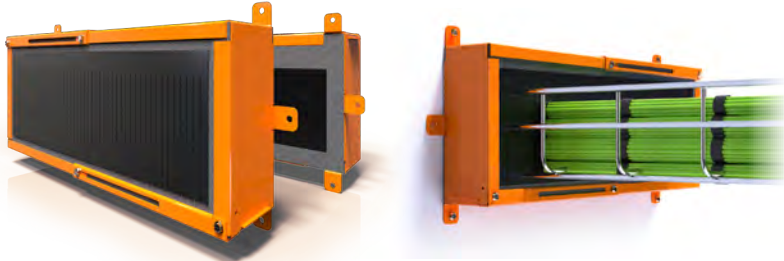Features & Benefits:

- Tested in Concrete and Gypsum Board Walls
- Sizes available for 12 in (304.8 mm) through 24 in (609.6 mm) wide cable trays
- Tested cable fills from 25 up to 100%
- Suitable for ladder and wire basket style cable trays
- Safety Orange for easy identification



Device Pair						ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Device						
EZCTR612	730573007396	Cable Tray Retrofit Device for max 6" by 12" cable trays, One Pair (2)	1	1	EZCTR612						
EZCTR614	730573007389	Cable Tray Retrofit Device for max 6" by 14" cable trays, One Pair (2)	1	1	EZCTR614						
EZCTR616	730573007372	Cable Tray Retrofit Device for max 6" by 16" cable trays, One Pair (2)	1	1	EZCTR616						
EZCTR618	730573007365	Cable Tray Retrofit Device for max 6" by 18" cable trays, One Pair (2)	1	1	EZCTR618						
EZCTR600P	730573007402	Oversized opening plates for Cable Tray Retrofit Device, One Pair (2)	1	1	EZCTR600P						
EZCTR624	730573007419	Cable Tray Retrofit Device for max 6" by 24" cable trays, One Pair (2) with Slim Mounting Frames	1	1	EZCTR624						
EZCTR624L	730573951118	Cable Tray Retrofit Device for max 6" by 24" cable trays, One Pair (2) with Mounting Plates for Oversized Hole in Wall	1	1	EZCTR624						



cast-in devices

SpecSeal CID Cast-In Firestop Device

Eliminate coring and firestop before the concrete pour with **SpecSeal® CID Cast-In Firestop Devices**. SpecSeal® CID is a sleeve, concrete core, firestop, and watertight seal rolled into a single device.

- Saves money by eliminating core drilling
- Single device for metal and plastic piping as well as cable bundles
- Sleeve is bidirectional allowing for both floor and ceiling penetration
- Saves time. No firestopping step required.
- Visible yellow tube for added job site safety
- Provides pre-installed fire and smoke sealing
- Provides protection against water damage (W-rating)



DEVICES FOR COMBUSTIBLE AND NONCOMBUSTIBLE PENETRANTS							
Catalog Number	Description	UPC Number	Pipe Trade Size	Concrete Thickness	(UOM) Qty.	Case Qty.	Weight (Each)
CD201GW	2" Device	30730573950846	1.5 in. (38 mm) - 2 in. (51 mm)	2.5 - 8 in (63.5 - 203 mm)	1	12	0.60 lbs (0.27 kg)
CD301GW	3" Device	30730573951218	3 in (76 mm)	2.5 - 8 in (63.5 - 203 mm)	1	12	1.45 lbs (0.65 kg)
CD401GW	4" Device	30730573951225	4 in (102 mm)	2.5 - 8 in (63.5 - 203 mm)	1	12	1.6 lbs (0.72 kg)
CD601GW	6" Device	30730573951294	6 in (152 mm)	2.5 - 8 in (63.5 - 203 mm)	1	6	2.95 lbs (1.33 kg)

EXTENSIONS FOR COMBUSTIBLE AND NONCOMBUSTIBLE PENETRANTS							
Catalog Number	Description	UPC Number	Pipe Trade Size	Concrete Thickness	(UOM) Qty.	Case Qty.	Weight (Each)
CD201EK	2" Extension Kit	30730573951232	1.5 in. (38 mm) - 2 in. (51 mm)	See Extensions Table	1	12	0.2 lbs (0.09 kg)
CD301EK	3" Extension Kit	30730573951249	3 in (76 mm)		1	12	0.3 lbs (0.14 kg)
CD401EK	4" Extension Kit	30730573951256	4 in (102 mm)		1	12	0.35 lbs (0.16 kg)
CD601EK	6" Extension Kit	30730573951300	6 in (152 mm)		1	6	0.43 lbs (0.20 kg)

EXTENSION DEPTH TABLE						
Catalog Number	Catalog Number	Pipe Trade Size	Device Configurable Height Range			
			Base + 1 Extension	Base + 2 Extensions	Base + 3 Extensions	Base + 4 Extensions
CD201GW	with CD201EK	1.5 in (38 mm) - 2 in (51 mm)	10" (254 mm) - 14.5" (368 mm)	16.5" (419 mm) - 21.75" (552 mm)	23" (584 mm) - 29" (737 mm)	29.5" (749 mm) - 36.25" (921 mm)
CD301GW	with CD301EK	3 in (76 mm)				
CD401GW	with CD401EK	4 in (102 mm)				
CD601GW	with CD601EK	6 in (152 mm)				

CAST-IN AERATOR ADAPTER					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
CD300A	730573343051	3 in. (76 mm) Cast In Device Aerator Adapter, Device not Included	1	6	1.61 lbs (0.73 kg)
CD400A	730573344058	4 in. (102 mm) Cast In Device Aerator Adapter, Device not Included	1	6	1.80 lbs (0.82 kg)

CAST-IN TUB BOX					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
CD23T	730573342404	Tub Box Kit for 2 in. & 3 in. Cast-In Devices, Device not Included	1	1	1.88 lbs (0.85 kg)
CD201T	730573342091	Tub Box Kit for min 4.5 in. (114 mm) thick concrete floors with 2 in. Device	1	1	3.62 lbs (1.64 kg)

CAST-IN DECK ADAPTER KITS					
Catalog Number	UPC Number	Pipe Trade Size	(UOM) Qty.	Case Qty.	Weight (Each)
CD201DK	730573342084	1.5 in. (38 mm) - 2 in. (51 mm)	1	6	0.70 lbs (0.32 kg)
CD301DK	730573343098	3 in. (76 mm)	1	6	0.95 lbs (0.43 kg)
CD401DK	730573344101	4 in. (102 mm)	1	6	1.24 lbs (0.56 kg)

CAST-IN DRAIN DEVICE					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
CD201FD	730573342435	2 in (51 mm) Trade Size Floor Drain Device	1	12	3.62 lbs (1.64 kg)

TEST STANDARDS*: ASTM E814 (UL 1479), CAN/ULC-S115
*When installed in conjunction with a SpecSeal® Cast-In Firestop Device



cable sleeves

SpecSeal Ready Sleeve Ready® Sleeve



SpecSeal® Ready® Sleeves are designed for new cabling penetrations where sleeves are required. Each Ready® Sleeve kit includes a preformed steel sleeve with rolled edges, steel escutcheon plates with intumescent gaskets, and a dose of our SpecSeal® SSP Firestop Putty. The rolled edges of each Ready® Sleeve eliminate the need for bushings while the included escutcheon plates and gaskets take the place of steel strut and strap supports.

- Offered in three sizes: 1 in., 2 in., & 4 in. diam.
- Complete kit including wall labels
- Sized for assemblies up to 10 in. thick
- Oversized escutcheon plates and gaskets available for larger openings

ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
FS100	730573201008	Cable Sleeve 1" (25 mm) sleeve (includes escutcheon plates, gaskets, and putty)	1	6
FS200	730573202005	Cable Sleeve 2" (51 mm) sleeve (includes escutcheon plates, gaskets, and putty)	1	6
FS400	730573204009	Cable Sleeve 4" (102 mm) sleeve (includes escutcheon plates, gaskets, and putty)	1	6
FS201	730573202012	Cable Sleeve 2" (51 mm) sleeve (includes escutcheon plates, gaskets, and putty)	1	N/A
FS401	730573204016	Cable Sleeve 4" (102 mm) sleeve (includes escutcheon plates, gaskets, and putty)	1	N/A

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115

Silver Color Re-Enterable Solution UL CERTIFIED

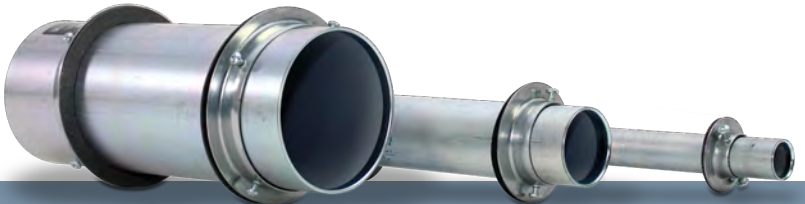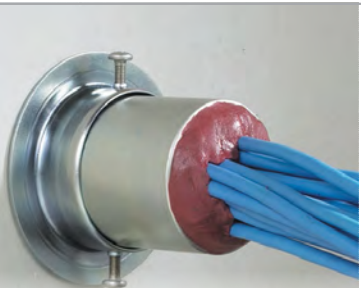

SpecSeal Ready Sleeve Ready® Sleeve Split Sleeve

SpecSeal® Ready® Split Sleeve kits easily install around existing cables. Each Ready® Split Sleeve kit includes two preformed steel sleeve halves with rolled edges, steel escutcheon plates with intumescent gaskets, and a dosage of our SpecSeal® SSP Firestop Putty. Ready® Split Sleeve's two-piece body and plates easily capture previously installed cables while tightly fastening to the penetrated barrier.

- Offered in three sizes: 1 in., 2 in., & 4 in. diam.
- Complete kit including wall labels
- Sized for assemblies up to 10 in. thick
- Oversized escutcheon plates and gaskets available for larger openings

ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
FSR100	730573210000	Cable Sleeve 1" (25 mm) split sleeve (includes escutcheon plates, gaskets, and putty)	1	4
FSR200	730573220009	Cable Sleeve 2" (51 mm) split sleeve (includes escutcheon plates, gaskets, and putty)	1	4
FSR400	730573240007	Cable Sleeve 4" (102 mm) split sleeve (includes escutcheon plates, gaskets, and putty)	1	4

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115

Silver Color Re-Enterable Solution UL CERTIFIED



cable penetration solutions

SpecSeal

FP

Intumescent Firestop Plug

SpecSeal® FP Intumescent Firestop Plugs are easy to install, creating a robust seal against fire and smoke. Firestop plugs make an excellent solution for temporary installation overnight, as well as permanent long-term seals for blank openings, and cable penetrations through common construction such as concrete or gypsum board. Sized to fit 2 in. and 4 in. diameter openings, firestop plugs make sealing conduit stubs and sleeves a breeze.

- Testing in Gypsum walls and concrete walls and floors
- Soft and easily compressed into conduit stubs and sleeves
- No expiration date
- Partners with other SpecSeal® Firestop Products

ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
FP200	730573072029	Firestop Plug sized for 2 in. (51 mm) opening/sleeve	1	10
FP400	730573072043	Firestop Plug sized for 4 in. (102 mm) opening/sleeve	1	10

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115

Red Color

Re-Enterable Solution

Permanent Solution

UL CERTIFIED

SpecSeal

SSP

Putty

SpecSeal® SSP Firestop Putty excels at sealing cabling penetrations. SSP Putty is non-hardening and easily hand works around grouped cabling penetrations forming a re-enterable seal allowing for future work.

- Available in bar form
- Remains pliable and workable for the lifetime of the installation
- Acoustically tested
- Will not harden overtime

ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
SSP100	730573021002	Firestop Putty 36 in³ (0.6 liter) bar	1	6
SSP28	730573021019	Firestop Putty 24 in³ (0.4 liter) bar	1	1

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115, ASTM E119 (UL263)

Red Color

Re-Enterable Solution

ACOUSTICAL 62 (Relates to specific construction)

UL CERTIFIED

FM APPROVED

Intertek

cable penetration solutions

SpecSeal

SSB

Intumescent Firestop Pillows

SpecSeal® SSB Firestop Pillows easily compress and conform around any penetrant. Equally suited for new or existing conditions, SpecSeal® Pillows make short work of even the most complex through-penetration firestop conditions.

- Available in four different sizes
- Tested in a wide range of construction types and configurations
- Easily installs from a single side
- Re-enterable allowing for future work in previously sealed openings

ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
SSB14	730573061404	Firestop Pillows 1" x 4" x 9" (25 mm x 101 mm x 225 mm)	1	20
SSB24	730573062401	Firestop Pillows 2" x 4" x 9" (50 mm x 101 mm x 225 mm)	1	10
SSB26	730573062609	Firestop Pillows 2" x 6" x 9" (50 x mm 152 mm x 225 mm)	1	22
SSB36	730573063606	Firestop Pillows 3" x 6" x 9" (76 x mm 152 mm x 225 mm)	1	16

TEST STANDARDS: ASTM E814 (UL1479), CAN/ULC-S115

Red Color

Re-Enterable Solution

ACOUSTICAL 60 (Relates to specific construction)

UL CERTIFIED

FM APPROVED

SpecSeal

CS

Composite Sheet

SpecSeal® Composite Sheet is the ideal solution for large openings where a permanent seal is required. Composite sheets consist of thin sheet steel, intumescent material, wire mesh, and aluminum foil. Used in conjunction with other SpecSeal® Firestop Products to seal large openings.

- Professional Fit and Finish
- Used with other SpecSeal® Firestop Products
- Easily cut with common sheet metal tools
- Tested for up to 4 Hours of fire resistance when tested to ASTM E814 (UL1479) or CAN/ULC-S115

ORDERING INFORMATION				
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
CS1628	730573116289	Composite Sheet 16" by 28" (41 cm by 71 cm)	1	1
CS2436	730573124369	Composite Sheet 24" by 36" (61 cm by 92 cm)	1	1
CS3636	730573141366	Composite Sheet 36" by 36" (92 cm by 92 cm)	1	1
CS3641	730573136416	Composite Sheet 36" by 41" (92 cm by 104 cm)	1	1
CS2852	730573136362	Composite Sheet 28" by 52" (71 cm by 132 cm)	1	1

TEST STANDARDS: ASTM E814 (UL1479) or CAN/ULC-S115

Silver Color

Permanent Solution

UL CERTIFIED

FM APPROVED

Customized products made **exclusively for you.**

At STI, we know there are times when you need our products in special sizes or colors. Our customizing service can help your next project be more efficient and cost effective. Custom orders do come with minimums and lead times. We will work with you to get you what you need—when you need it.



Make your work stand out with EZ Path® Custom Color Fire-Rated Pathways.

Eliminate guesswork. Streamline work flow and increase the visibility of your cable pathways. Segregate cables and systems by use, type and vendor. Perform moves, adds, and changes more easily and head off potential problems by visually organizing your cable systems.

EZ Path® Custom Color Fire-Rated Pathways—**the only** fire-rated pathway available in colors. Specify your own colors. Custom attachments are also available.

To request a quote email us at customquotes@stifirestop.com

Minimums and lead times may apply.

Environmental **stewardship**

Many of our products have contributed to sustainability programs including LEED and Living Building Challenge 4.0 and are GREENGOLD certified by UL. Discover how STI products help contribute to your sustainability goals.

We are committed to environmental stewardship and providing products that are environmentally friendly and to protecting the local and global environment.

- Producing products using environmentally friendly processes
- Using reclaimed/recycled ingredients wherever possible
- Using non-hazardous ingredients
- Examining environmental issues when developing products
- Preventing pollution, reduce waste and minimize consumption of resources
- Respect wider global impact of our activities including shipping and warehousing
- Educating and motivating employees to carry out work in an environmentally friendly manner
- Encouraging environmental protection among suppliers and subcontractors
- Using sensors and energy efficient lighting systems and components at all facilities
- Encouraging water conservation practices and use fixtures and equipment that conserve water in all facilities



**LIVING
BUILDING
CHALLENGE™**

North America

Corporate Headquarters

210 Evans Way
Somerville, NJ 08876 USA
Tel: +1 908 526 8000

Email: customerservice@stifirestop.com

Latin America

Regional Office

Av. Das Nacoes Unidas 8501, 17º andar
Sao Paulo – SP, Brasil 05425-070
Tel: +55 (11) 3434 6662

Email: cs_latin_america@stifirestop.com

Middle East

Regional Office

The Bridge Tower, Office 202
Dubai Sports City,
Dubai, United Arab Emirates
Tel: +971 55 872 11 89

Email: cs_middle_east@stifirestop.com

Southeast Asia

Regional Office

77, Robinson Road
#13-00, Robinson 77
Singapore 068896
Tel: +65-96369000

Email: cs_south_east_asia@stifirestop.com

China

Regional Office

Room 2111, Block C, South Tower, The Hub
1068 Xin Gang East Road, Haizhu District
Guangzhou, PR China 510335
Tel: +86-20-89048831

Email: cs_greater_china@stifirestop.com

Europe

Regional Office

118 Avenue de France
Paris, 75013, France
Tel: +33 674 930 111

Email: cs_europe@stifirestop.com

India

Regional Office

Mumbai
Maharashtra, India
Tel: +91 98 19 79 69 15

Email: cs_india@stifirestop.com



**Specified
Technologies Inc.**
We engineer peace of mind.