

SpecSeal®

CS


INTUMESCENT SHEET FOR LARGE OPENINGS

Composite Sheet

SpecSeal® Composite Sheet is the ideal solution for large openings where a permanent seal is required. Composite sheets consist of thin sheet steel, intumescent material, wire mesh, and aluminum foil. Used in conjunction with other SpecSeal® Firestop Products to seal large openings.

Features & Benefits

- Professional Fit and Finish
- Used with other SpecSeal® Firestop Products
- Easily cut with common sheet metal tools
- Tested for up to 4 Hours of fire resistance when tested to CAN/ULC-S115

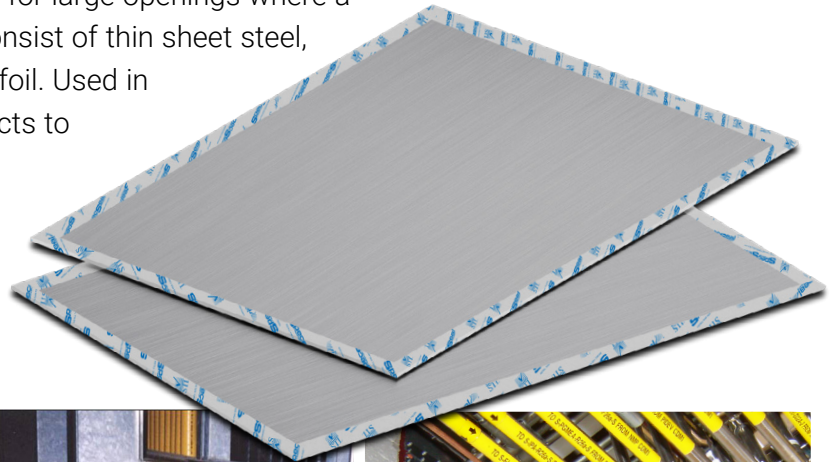

ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
CS1628	730573116289	16" by 28" (41 cm by 71 cm) composite sheet	1	1	5.80 lbs (2.63 kg)
CS2436	730573124369	24" by 36" (61 cm by 92 cm) composite sheet	1	1	10.65 lbs (4.83 kg)
CS3636	730573141366	36" by 36" (92 cm by 92 cm) composite sheet	1	1	15.65 lbs (7.10 kg)
CS3641	730573136416	36" by 41" (92 cm by 104 cm) composite sheet	1	1	12.40 lbs (5.62 kg)
CS2852	730573136362	28" by 52" (71 cm by 132 cm) composite sheet	1	1	12.75 lbs (5.78 kg)

TEST STANDARDS: ASTM E814 (UL1479) or CAN/ULC-S115



1-800-992-1180
stifirestop.com



[Click here to learn more about](#)



ZSTI3497-11121