


Residential Wood Frame

Firestop Solutions

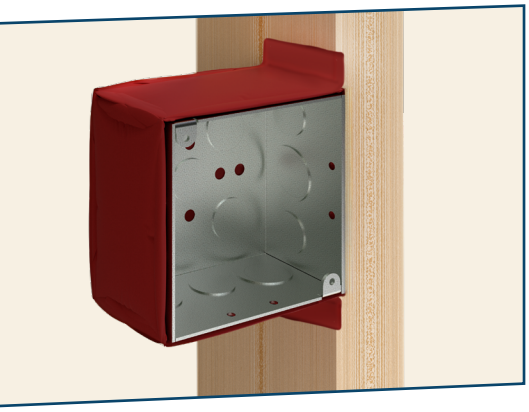

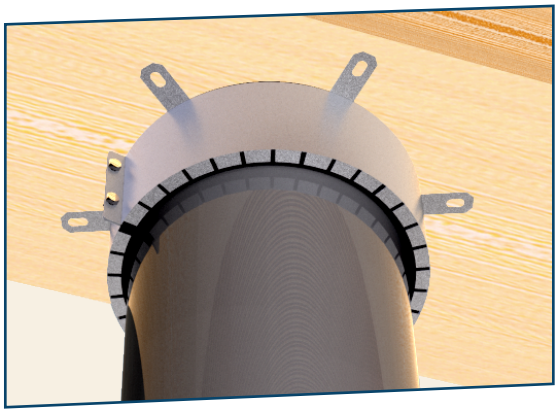

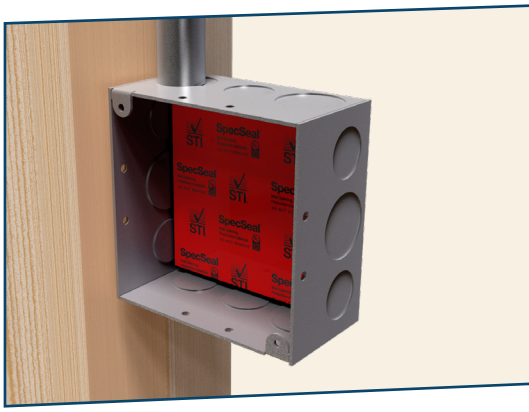

Specified Technologies Inc.

Firestop, Smoke, & Sound Solutions

Residential Wood Frame

Wood frame remains a very popular method of construction. Both cost-effective and sustainable, wood frame structures for residential multi-family, dormitories, senior housing, and more are prevalent. Building codes, including the International Building Code® (IBC) and Canada's National Building Code, include provisions for building out of wood, including structures up to five or six stories in height. As these structures soar to new heights, proper firestopping is essential, and we can help.

MADE IN USA



SpecSeal RTC

RTC Intumescent Firestop Collars

RTC Firestop Collars are adjustable collars sized for 3" and 4" trade size plastic pipes or 3" or 4" trade size plastic pipe couplings.

SpecSeal LCC

LCC Intumescent Firestop Collars

SpecSeal® LCC Firestop Collars are factory-manufactured firestop devices sized to plastic pipes of up to 4" Trade Size. LCC Collars consist of a restraining collar with a factory applied intumescent ensuring the correct amount of material is applied every time.

SpecSeal CF

Closet Flange Firestop Gasket

SpecSeal® Closet Flange Firestop Gaskets are one-piece, molded rubber, intumescent pads that install beneath a 3" (76 mm) or 4" (102 mm) closet flange to effectively firestop the opening. The die cut rubber gasket is perforated to delineate removable inserts sized to accommodate various outer diameters of toilet flanges.

SpecSeal EP



PowerShield® Electrical Box Insert

Electrical box inserts install inside electrical boxes to prevent the spread of fire from room-to-room. Box inserts can be installed onsite or at a fab shop so that boxes show up pre-firestopped.

SpecSeal SSP



Putty Pads

SpecSeal® SSP Firestop Putty Pads consist of non-hardening putty that can be used to seal the outside surfaces of electrical boxes. In addition to fire protection, they provide optimal sound attenuation.

WF



Intumescent Firestop Caulk

WF300 Intumescent Firestop Caulk is a latex-based firestop caulk designed for residential wood frame construction. WF300 Caulk is tested for addressing penetrations through wood/frame construction such as wood stud walls and floor/ceiling assemblies. Under fire exposure, WF300 expands to up to four times its original volume.

Ordering Information

SpecSeal® RTC Firestop Collars

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
RTC350	730573038352	Adjustable factory collar for 3" (89 mm) & 4" (114 mm) pipe and associated couplings	1	6	0.80 lbs (0.36 kg)

SpecSeal® LCC Firestop Collars

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
LCC150	730573039014	Firestop Collar for 1.5" (38 mm) Trade Size Plastic Pipe	1	6	0.22 lbs (0.10 kg)
LCC200	730573039021	Firestop Collar for 2.0" (51 mm) Trade Size Plastic Pipe	1	6	0.24 lbs (0.11 kg)
LCC300	730573039038	Firestop Collar for 3.0" (76 mm) Trade Size Plastic Pipe	1	6	0.46 lbs (0.21 kg)
LCC400	730573071083	Firestop Collar for 4.0" (102 mm) Trade Size Plastic Pipe	1	6	0.75 lbs (0.34 kg)
SSC600	730573071083	Firestop Collar for 6.0" (152 mm) Trade Size Plastic Pipe	1	6	5 lbs (2.27 kg)

SpecSeal® EP Powershield™ Electrical Box Insert

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
EP44	730573025000	3.75" x 3.75" x 1/8" (95 mm x 95 mm x 3 mm)	1	20	0.09 lbs (0.04 kg)
EP44-Bulk	730573025017	3.75" x 3.75" x 1/8" (95 mm x 95 mm x 3 mm) Bulk	N/A	600	0.09 lbs (0.04 kg)
EP45	730573025055	4.5" x 4.5" x 1/8" (114 mm x 114 mm x 3 mm)	1	20	0.13 lbs (0.06 kg)
EP45-Bulk	730573025062	4.5" x 4.5" x 1/8" (114 mm x 114 mm x 3 mm) Bulk	N/A	450	0.13 lbs (0.06 kg)
EP55	730573025550	4.75" x 4.75" x 1/8" (121 mm x 121 mm x 3 mm)	N/A	250	(0.15 lbs (0.07 kg)

SpecSeal® SSP Putty & Putty Pads

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
SSP4S	73057302200	7.25˝ x 7.25˝ x 3/16˝ (184 x 184 x 4.8 mm) pad	1	20	0.64 lbs (0.29 kg)
SSP9S	730573081457	9.00˝ x 9.00˝ x 3/16˝ (229 x 229 x 4.8 mm) pad	1	20	0.85 lbs (0.39 kg)

WF300 Intumescent Firestop Caulk

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
WF310	730573097106	10.1 Oz. Tube - 18.2 cu. in. (300 ml)	1	12	0.95 lbs (0.43 kg)
WF329	73057309729	29 Oz. Tube - 52 cu.in. (858 ml) (minimum quantities required)	1	N/A	2.73 lbs (1.23 kg)
WF320	730573097205	20 Oz. Sausage - 36 cu. in. (592 ml)	1	12	1.70 lbs (0.77 kg)
WF305	730573071083	5 Gallon Pail - 1,155 cu. in. (19.0 liters)	1	N/A	54.30 lbs (24.63 kg)

SpecSeal® Closet Flange Firestop Gasket

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
CF34	730573037805	Gasket sized for 3" (76 mm) or 4" (102 mm)	1	10	0.20 lbs (0.09 kg)

North America
Corporate Headquarters

210 Evans Way
Somerville, NJ 08876 USA
Tel: +1 908 526 8000
Email: customerservice@stifirestop.com

Latin America
Regional Office

Av. Das Nacoes Unidas 8501, 17° andar
Sao Paulo – SP, Brasil 05425-070
Tel: +55 (11) 3434 6662
Email: cs_latin_america@stifirestop.com

Europe
Regional Office

118 Avenue de France
Paris, 75013, France
Tel: +33 674 930 111
Email: cs_europe@stifirestop.com

Middle East
Regional Office

The Bridge Tower, Office 202
Dubai Sports City,
Dubai, United Arab Emirates
Tel: +971 55 872 11 89
Email: cs_middle_east@stifirestop.com

Southeast Asia
Regional Office

77, Robinson Road
#13-00, Robinson 77
Singapore 068896
Tel: +65-96369000
Email: cs_south_east_asia@stifirestop.com

China
Regional Office

Room 2111, Block C, South Tower, The Hub
1068 Xin Gang East Road, Haizhu District
Guangzhou, PR China 510335
Tel: +86-20-89048831
Email: cs_greater_china@stifirestop.com

India
Regional Office

Mumbai
Maharashtra, India
Tel: +91 98 19 79 69 15
Email: cs_india@stifirestop.com

We engineer peace of mind.

1 (800) 992-1180 stifirestop.com

Specified Technologies Inc.
Firestop, Smoke, & Sound Solutions

ZSTI3556 25352