


















KLONDIKE®

We Grow Independent Business

Heavy Duty Engine Oils	9
Automotive Engine Oils	15
Gear Lubricants	21
Transmission Fluids	27
Hydraulic Fluids	35
Industrial & Functional Fluids	43
Greases	51
Biodegradable Lubricants	57
FOOD-GRADE Lubricants	61
Antifreeze/Chemicals	65



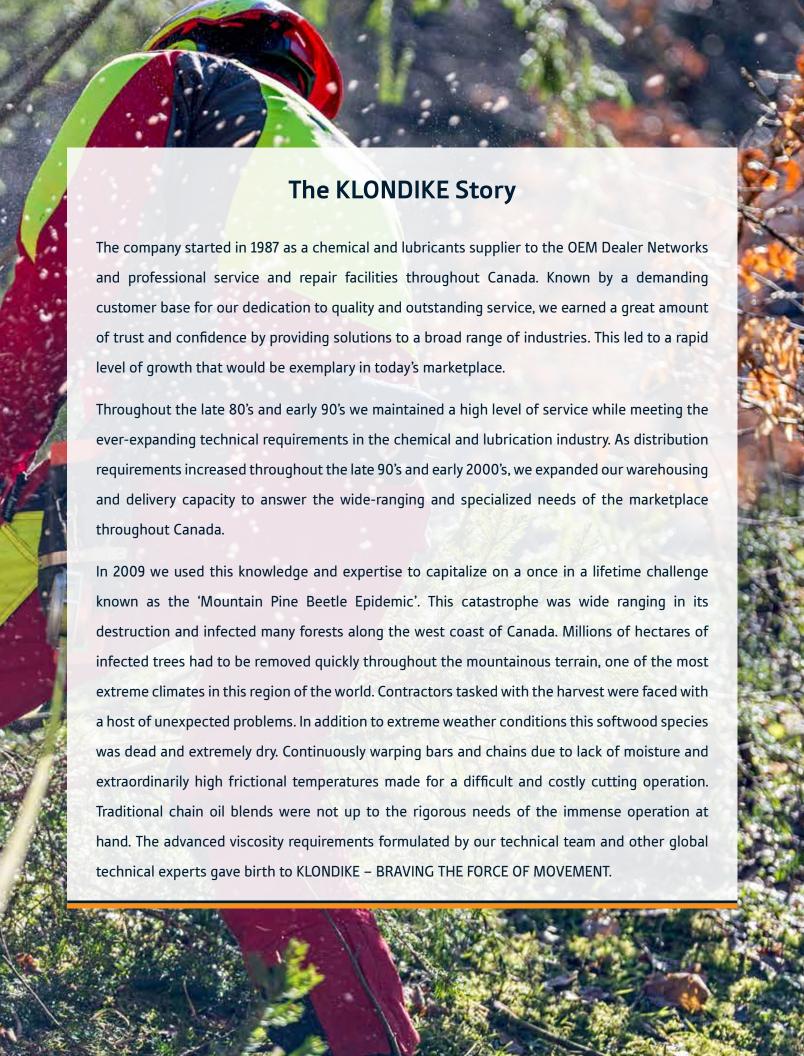

KLONDIKE HD SYN DRIVE Meets Allison TES-668® Standard For Automatic Transmission Fluids



Our HD SYN DRIVE Full Synthetic Transmission Fluid has been licensed and approved by Allison Transmission for TES-668°. This is great news as Allison Transmissions are used by virtually all major OEM brands.

This next generation transmission fluid supersedes previous generation specifications and is recommended for use in Allison 1000 Series™, 2000 Series™, 3000 Series™, 4000 Series™ H 40/50 EP™and eGen Flex™ Series transmission products.



XVI ALL SEASON SYN BLEND EXTREME ANTI-WEAR HYDRAULIC FLUID

Recommended for vane, piston, or gear-type hydraulic pumps in heavy duty, industrial machines and mobile equipment.

KLONDIKE XVI All Season Syn Blend Extreme Anti-Wear Hydraulic Fluid is a year-round hydraulic fluid for all climates. This special formulation offers very high viscosity index (VI) which provides greater output and energy efficiency.



FOOD-GRADE Lubricants

Lubricants designed specifically for use in food processing equipment.

KLONDIKE's FOOD-GRADE products are registered with NSF for use in the food and beverage industry and carry the H1 credentials for incidental food contact.

The NSF mark confirms that products meet all requirements and demonstrates KLONDIKE's commitment to quality, compliance, and safety.

A high-quality H1 lubricant minimizes the risk of contamination and ensures the longevity and performance of equipment.







EASY ON YOUR WALLET. EASY ON YOUR BACK.

Save EHC fees with KLONDIKE EZE-KEG.

A range of Euro Automotive products are available in our metal 52 L EZE-KEG. The metal kegs work on our EZE-KEG racks and can be interchanged with our existing plastic EZE-KEGS.

KLONDIKE EZE-KEG PRODUCTS	PART #
OW-20 C5 Euro Full Synthetic Engine Oil	KL-LD4084
OW-20 Euro Full Synthetic Engine Oil	KL-LD4284
• 5W-30 Euro Full Synthetic Low SAPS Engine Oil	KL-LD4684
• 5W-30 Euro Full Synthetic Mid SAPS Engine Oil	KL-LD4884
• 5W-40 Euro Full Synthetic Mid SAPS Engine Oil	KL-LD5284
ULV Full Synthetic ATF	KL-TF2684



KLONDIKE heavy duty engine oils are formulated to assist in maximizing engine life and minimizing wear. Our advanced processes and technologies enable KLONDIKE heavy duty motor oils to strike a balance between durability, emission control, optimized drain intervals, and improved efficiencies for your equipment.

KLONDIKE API CK-4 heavy duty engine oils are a direct successor and replacement for API CJ-4 fluid technology. API CK-4 fluids are fully backwards compatible and supersede CJ-4 and previous service categories. KLONDIKE API CK-4 fluids offer improvements in fuel efficiency, oxidation resistance, viscosity shear stability, and aeration control over the previous fluid technologies. KLONDIKE heavy duty oils have been approved by global OEM's, including:













Heavy Duty Engine Oils









modern diesel engines in on-road and off-road heavy-duty equipment.





KL-HD0295

Price:











KL-HD0390





SAE 10W-30 CK-4 Synthetic Blend is OEM certified by Cummins, Detroit Diesel, Volvo, Mack,

SAE 10W-30 CK-4 Commercial is a high performance mixed fleet engine oil; designed for use in

Price:



SAE 10W-40 CK-4 Synthetic Blend is recommended for use in naturally aspirated and turbocharged heavy duty diesel engines specifying API CK-4 Service Category and SAE 10W-40.







KL-HD0380



KL-HD0490



KL-HD0495



Price:



SAE 15W-40 CK-4 Advanced Formula is OEM certified by Cummins, Detroit Diesel, Volvo, Mack, Ford, and Renault; and recommended for use in all engines specifying API CK-4 Service Category and SAE 15W-40.



KL-HD0540



KL-HD0560



KL-HD0575



KL-HD0580



KL-HD0582



DRUM KL-HD0584 KL-HD0590



KL-HD0595

C 2 6 1 & com



KL-HD0599

Price:

Heavy Duty Engine Oils



SAE 15W-40 CK-4 Commercial is a mixed fleet engine oil recommended for naturally aspirated and turbocharged diesel and gasoline engines in which SAE 15W-40 viscosity grade and API CK-4











KL-HD0795 KL-HD0799

Price:



SAE 0W-30 CK-4 Full Synthetic is recommended for use in heavy duty engines specifying API Service Categories CK-4, CJ-4, Cl-4 PLUS, Cl-4, and SAE grade 0W-30.









KL-HD2099

Price:



SAE 0W-40 CK-4 Full Synthetic is recommended for use in heavy duty engines specifying API Service Categories CK-4, CI-4 PLUS, CI-4, and SAE grade 0W-40.







KL-HD2590



KL-HD2595

KL-HD2599

SAE 5W-40 CK-4 Full Synthetic is OEM certified by Detroit Diesel, Volvo, Mack, Ford, and Renault; and recommended for use in all engines specifying API CK-4 Service Category and SAE 5W-40.

Price:









KL-HD3080





KL-HD3084



KL-HD3090

SAE 15W-40 CK-4 Full Synthetic is recommended for use in heavy duty engines specifying API



KL-HD3095



Price:



CK-4 Service Category and SAE 15W-40. **DRUM** KL-HD3580 KL-HD3590





KL-HD3595 KL-HD3599

Price:

PAIL

CHEMICALS ANTIFREEZE

Heavy Duty Engine Oils



SAE 10W-30 FA-4 Synthetic Blend is recommended for use in GHG-17 compliant engines where the use of FA-4 engine oils is specified.



KL-HD4290

KL-HD4299

Price:

SAE 10W CF Heavy Duty Engine Oil is recommended for use in use in applications where SAE 10W monograde meeting API CF is specified.











KL-HD6099

Price:

SAE 30 CF-2 Heavy Duty Engine Oil is recommended for use in gasoline and diesel engines where SAE 30 monograde meeting API CF-2 is specified.









KL-HD6360





KL-HD6390



KL-HD6399

Price:

SAE 40 CF-2 Heavy Duty Engine Oil is recommended for use in qasoline and diesel engines where SAE 40 monograde meeting API CF-2 is specified.















Price:



SAE 50 CF-2 Heavy Duty Engine Oil is recommended for use in qasoline and diesel engines where SAE 50 monograde meeting API CF-2 is specified.





KL-HD6660







KL-HD6880

KL-HD6890

KL-HD6895

KL-HD6899

Price:

11

Heavy Duty Engine Oils





KL-HD7080





KL-HD7095



or naturally aspirated engines running on natural gas and requiring low ash engine oil.

SAE 15W-40 Low Ash Natural Gas is recommended for use in heavy duty on-road turbo-charged

SAE 10W-40 Low Ash Natural Gas Synthetic Blend is recommended for modern naturally

KL-HD7099

aspirated and turbocharged four-stroke engines running on natural gas.

Price:

3.78 L JUG







KL-HD7250 KL-HD7290

KL-HD7295

Price:

SAE 40

SAE 40 Low Ash Natural Gas is specifically designed for use in medium and high speed (rpm) engines fueled by pipeline natural gas.



DRUM KL-HD7490 KL-HD7495



KL-HD7499

Price:

SAE 40

SAE 40 Low Ash Sour Natural Gas is recommended for heavy duty stationary turbo-charged or naturally aspirated, stoichiometric or lean burn engines running on landfill or organic/bio gas and requiring low ash engine oil.







Price:

KL-HD7695

KL-HD7699



SAE 20W-40 Railroad Engine Oil is an advanced ashless formulation for large diesel engines in railroad, marine, and power generation applications. Designed for use in heavy duty diesel engines specifying SAE 20W-40 multigrade zinc-free engine oil.







KL-HD8290 Price:

KL-HD8295

KL-HD8299

Heavy Duty Engine Oils

SAE 40 Railroad Engine Oil is an advanced ashless formulation for large diesel engines in



railroad, marine, and power generation applications. Designed for use in heavy duty diesel engines specifying SAE 40 monograde zinc-free engine oil.

DRUM



KL-HD8499

KL-HD8490 KL-HD8496

KLONDIKE advanced technology automotive engine oils are formulated for optimum efficiency and are designed for use in modern, highly fuel efficient engines that are subject to increasing levels of stress such as stop-and-go city driving, frequent short trips, extreme high and low operating temperatures, extended idling and towing. KLONDIKE synthetic blend and full synthetic motor oils for passenger cars offer superior oxidation stability, extra protection against heavy load conditions, additional high temperature protection, and better cold weather properties than conventional motor oils. Additionally, KLONDIKE premium quality automotive engine oils are formulated under the newest technology and are certified under the latest API SP and ILSAC GF-6 specification category. These current specifications supersede and replace prior generation categories.










Automotive Engine Oils









SAE 5W-20 Commercial PCMO offers a high level of engine protection and is recommended for passenger cars and light trucks.

SAE 5W-30 Commercial PCMO offers a high level of engine protection and is recommended for

SAE 10W-30 Commercial PCMO offers a high level of engine protection and is recommended for





KL-LD0090





Price:











DRUM KL-LD0290 KL-LD0295

KL-LD0299

Price:



passenger cars and light trucks.





KL-LD0490

KL-LD0495 KL-LD0499

Price:



SAE 10W-40 API SP uses a specialized formula for older, high mileage engines. Recommended for use in passenger cars, light trucks, sport utility vehicles, and other stationary or mobile engines.







KL-LD0540 KL-LD0590

KL-LD0599

Price:

16

Automotive Engine Oils



SAE 20W-50 API SP uses a specialized formula for older, high mileage engines. Recommended for

use in passenger cars, light trucks, sport utility vehicles, and other stationary or mobile engines.

KL-LD0690 Price:

KL-LD0699

stationary or mobile engines specifying SAE 5W-20 grade and API SP/GF-6A Service Category.



KL-LD1040 KL-LD1060

KL-LD1080





SAE 5W-20 API SP/GF-6A High Mileage Synthetic Blend is designed to help extend engine life and provide enhanced protection and performance in engines with 120,000 kms or greater.

SAE 5W-20 API SP/GF-6A Synthetic Blend is recommended for use in automobiles and other



KL-LD1090





Price:











KL-LD1190

BULK KL-LD1199



stationary or mobile engines specifying SAE 5W-30 grade and API SP/GF-6A Service Category.







KL-LD1260



KL-LD1280



KL-LD1282





KL-LD1284

SAE 5W-30 API SP/GF-6A Synthetic Blend is recommended for use in automobiles and other



KL-LD1290



KL-LD1295



Price:

KL-LD1240

SAE 5W-30 API SP/GF-6A High Mileage Synthetic Blend is designed to help extend engine life and provide enhanced protection and performance in engines with 120,000 kms or greater.









KL-LD1390

KL-LD1399

Automotive Engine Oils





KL-LD1440



KL-LD1460



KL-LD1480



KL-LD1482



SAE 10W-30 API SP/GF-6A Synthetic Blend is recommended for use in automobiles and other stationary or mobile engines specifying SAE 10W-30 grade and API SP/GF-6A Service Category.





KL-LD1495 KL-LD1499



SAE 0W-16 API SP/GF-6B Full Synthetic is a highly advanced, 100% synthetic engine oil formulation engineered to provide exceptional fuel economy potential and recommended for use in modern high performance automobiles specifying SAE 0W-16 grade and API SP/GF-6B.



KL-LD2840



KL-LD2890



KL-LD2899

Price:



SAE 0W-20 API SP/GF-6A dexos1° Full Synthetic is GM dexos1° certified and recommended for use in automobiles and light trucks specifying SAE 0W-20 grade and API SP/GF-6A.







KL-LD3082







KL-LD3095

KL-LD3099

Price:





SAE 5W-20 API SP/GF-6A Full Synthetic is recommended for use in automobiles and light trucks specifying SAE 5W-20 grade and API SP/GF-6A.

KL-LD3090





KL-LD3240 KL-LD3260











KL-LD3290

KL-LD3295

KL-LD3299

Price:



SAE 5W-30 API SP/GF-6A dexos1° Full Synthetic is GM dexos1° certified and recommended for use in automobiles and light trucks specifying SAE 5W-30 grade and API SP/GF-6A.







KL-LD3440 KL-LD3460











KL-LD3482 KL-LD3484 KL-LD3490

KL-LD3495

KL-LD3499



18

Automotive Engine Oils



Price:









SAE 0W-20 C5 Full Synthetic is specially formulated to meet the requirements of ACEA C5. Robust technology meets the demanding specifications of European OEM's including resistance against









Price:

SAE OW-20 Euro Full Synthetic is recommended for use in European gasoline and diesel fueled engines. Specially formulated to exceed demanding OEM requirements for fuel economy, while KL-LD4240









SAE 0W-30 Euro Low SAPS Full Synthetic is recommended for use in European gasoline and diesel










Price:

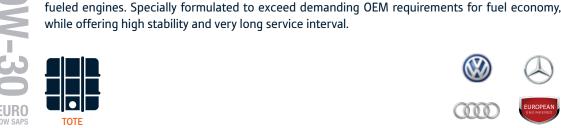

while offering high stability and very long service interval.

KL-LD4595
















KL-LD4660



while offering high stability and very long service interval.



KL-LD4690



KL-LD4695

SAE 5W-30 Euro Low SAPS Full Synthetic is recommended for use in European gasoline and diesel fueled engines. Specially formulated to exceed demanding OEM requirements for fuel economy,









Price:



specialty base oils and additives. Designed for use in European gasoline and diesel fueled engines. KL-LD4840









KL-LD4890



KL-LD4895

SAE 5W-30 Euro Mid SAPS Full Synthetic is an extended service life, premium engine oil with



KL-LD4699









Price:



Automotive Engine Oils



EURO



EZE-BOX KL-LD5082





SAE 5W-40 Euro Mid SAPS Full Synthetic is a very high-performance engine oil that resists oxidation, sludge deposits, and viscosity loss. Designed for use in European gasoline and diesel fueled engines.

SAE 5W-40 Euro Advanced Full Synthetic is a very high-performance engine oil that resists oxidation, sludge deposits, and viscosity loss. Designed for use in European gasoline and diesel

SAE 5W-40 SN/CF Euro Full Synthetic is recommended for use in modern European 4, 6 and 8+

cylinder multi-cam, multi-valve, naturally aspirated, super- and turbo-charged engines.





KL-LD5240







KL-LD5290

















fueled engines.



KL-LD5395











SAE OW-40 Euro Mid SAPS Full Synthetic is a very high-performance engine oil that resists oxidation, sludge deposits, and viscosity loss. Designed for use in European gasoline and diesel fueled engines.















Tough operating conditions are no match for KLONDIKE **gear** oils. They are specially formulated for maximum protection, durability, and efficiency no matter what climate or conditions are prevalent. Only the finest technology available is used in manufacturing our premium synthetic gear lubricants. KLONDIKE robust formulations are designed for gears and differentials that place rigorous demands on fluid technology and require extreme temperature and pressure protection. Driveline components in today's automotive and heavy duty vehicles have become increasingly stressed by increased engine output, higher operating temperatures, and extended service intervals. KLONDIKE's advanced gear oil technology protects against severe wear while balancing fluid durability in heavy load conditions, including extended drain intervals when applicable.

Gear Lubricants









SAE 80W-90 GL-5 Commercial is designed for use in hypoid differentials, gear boxes, and axle









final drives specifying SAE 80W-90 and API GL-5/MT-1.

KL-GL1080

lubrication where API GL-5 performance is required.





KL-GL0880 KL-GL0885

KL-GL0895

KL-GL0899

Price:













KL-GL1085





KL-GL1095

KL-GL1099

Price:

SAE 85W-140 GL-5 is designed for differentials, manual transmissions, power take off units, and final drives specifying SAE 85W-140 and API GL-5/MT-1.

KL-GL1090

SAE 80W-90 GL-5 is designed for differentials, manual transmissions, power take off units, and









KL-GL1380

DRUM KL-GL1390

KL-GL1395

Price:



specifying SAE 75W-90 and API GL-5/MT-1 including limited slip.

QUART









SAE 75W-90 GL-5 Full Synthetic is recommended for use in heavy duty gear applications



KL-GL2099

PAIL KL-GL2040 KL-GL2080 KL-GL2085

KL-GL2090

KL-GL2095

Price:

Gear Lubricants



Price:

SAE 75W-140 GL-5 Full Synthetic is recommended for use in heavy duty gear applications









ISO 68 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on



KL-GL2480

drives of all sizes where ISO 68 is specified.

KL-GL2485

specifying SAE 75W-140 and API GL-5/MT-1 including limited slip.

KL-GL2490

KL-GL2495

KL-GL2499









KL-GL3680

KL-GL3690

KL-GL3695

KL-GL3699

Price:

ISO 100 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on











drives of all sizes where ISO 100 is specified.





PAII

KL-GL3880 KL-GL3890

KL-GL3895

KL-GL3896

KL-GL3899

Price:



ISO 150 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 150 is specified.





KL-GL4090



TOTE

KL-GL4095



KL-GL4096



KL-GL4080

Price:

ISO 220 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 220 is specified.









DRUM KL-GL4280 KL-GL4290

KL-GL4295

XL TOTE KL-GL4296

Price:

CHEMICALS ANTIFREEZE

Gear Lubricants





KL-GL4480



KL-GL4490



KL-GL4495

drives of all sizes where ISO 320 is specified.





ISO 320 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on

Price:

ISO 460 EP is designed for heavily loaded plain bearings, enclosed gear drives, and reducers on drives of all sizes where ISO 460 is specified.













KL-GL4699

KL-GL4680

Price:

ISO 150 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 150 is specified.









KL-GL6090

KL-GL6080

KL-GL6095

Price:

ISO 220 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 220 is specified.

ISO 320 EP Full Synthetic is formulated for industrial bearings and gear applications operating in













KL-GL6280

KL-GL6290

KL-GL6295

KL-GL6299

Price:

KL-GL6480









very heavy duty and shock-loaded conditions where ISO 320 is specified.

KL-GL6490

KL-GL6495 KL-GL6499

Price:

24

Gear Lubricants











ISO 460 EP Full Synthetic is formulated for industrial bearings and gear applications operating in

KL-GL6690 KL-GL6680

KL-GL6695

KL-GL6699

Price:



ISO 680 EP Full Synthetic is formulated for industrial bearings and gear applications operating in very heavy duty and shock-loaded conditions where ISO 680 is specified. Price:





KL-GL6880

KL-GL6890

CHEMICALS ANTIFREEZE

25

KLONDIKE **transmission** fluids are formulated for use in a full range of automatic transmissions and provide premium shifting characteristics. This extensive line of automatic transmission fluids offers smooth yet responsive shifting, long service life, and outstanding fuel efficiency. KLONDIKE transmission oils are engineered to provide improved performance, extended transmission life, as well as premium flow characteristics at very low temperatures and protection against oxidation, varnish and sludge at high temperatures.





MERCON® LV









TYPE-F Automatic Transmission Fluid is a non friction-modified fluid designed for use in older Ford vehicles, and other import brands, where such a fluid is specified.







Price:



Price:





KL-TF1060







Synchromesh SAE 75W-80 GL-4 Full Synthetic Manual Transmission Fluid is specifically developed for manual transmissions and transfer cases in passenger cars and trucks, engineered

to exceed OEM standards for smooth, precise shifting and advanced antiwear protection.





KL-TF1080

KL-TF1082

KL-TF1090

KL-TF1095

KL-TF1099

1 L BOTTLE

Price:

KL-TF1640

ULV Full Synthetic Automatic Transmission Fluid is designed for use in automatic transmissions manufactured by North American, European, Asian, and other manufactures around the world using 9 and 10 speed high performance transmission designs.









1 L BOTTLE KL-TF2640





28

Transmission Fluids



ATF Universal Full Synthetic is one highly advanced and truly universal automatic transmission fluid ideal for global application. Meets the performance requirements of (but not limited to):

- Aisin JWS 3309, 3324 (all OEM's)
- Allison C-3, C-4
- **Audi** 5HP LT71141, G 052 162-A1/A2, G 052 025 A2 053 025 A2, 060 162, 055 540 A2, 052 990, 052 055
- Bentley PY112995PA
- **BMW** JWS 3309, LA2634, 7045E, LT71141, ETL 8072B, ZF 5HP18FL, 19FL, 5HP24, 5HP30,
- Bosch TE-ML 09
- CAT TO-2
- **Chrysler** 05127382AA(MB 236.12), 68043742AA(D-VI), 68157995AA(ZF 8 & 9), 68157995AB, 68171866AA(SP-IV), Mopar 8 & 9 fluid 68218925AA (ZF 8HP45 & ZF 9HP45)
- **Chrysler** AS68RC, AS69RC (T-IV), Diamond SP-III, ATF+3, ATF+4
- Daewoo LT 71141
- Daihatsu AMMIX ATF D-II, D-III SP
- Esso LT 71141
- Fiat T-VI, JWS 3309
- Ford M2C166H (XL-12), 138CJ, 922A1, 924A, JWS 3309, XT-2-QDX (Mercon V), XT-2-QSM (Synthetic Mercon), Ford FNR5, (Mazda M5, XT-9-QMM5),
- Ford Mercon LV (FF-WSS M2C938A/SF, XT-10-QLV)
- Fuchs 3353
- FUSO ATF-II, SPIII, A4
- GM Dexron HP, Dexron VI, Dexron III (H,G,F,E,D) Dexron II (D,E) Dexron, AW1
- GM Autotrak II (Transfer Case Fluid)
- **GM** (GMC, Opel, Saturn) 88863400/88863401(WS ATF), JWS 3309, 19 40 700, 19 40 767, 21005966 Transaxle, 22 17466, 88900925(T-IV), 9986195 (Aisin AW), AS69RC
- GMN 10060
- Hino Blue Ribbon ATF
- Honda ATF Ultra II, DW-1, Z-1, 3.0, 3.1
- Hyundai/Kia SP-IV, SP-IV M, SPH-IV, SP-IV RR, SP-III, Dex-II/SP-II, JWS 3314, 9683, 04000090SG, NUMM040 CH20 Red-1
- IDEMITSU APOROIL ATF HP, Idemitsu K17 3100 PL085
- ISUZU BESCO ATF-II, III, Isuzu SCS, ATF-III, ATF SP, 08200-9001

- Jaguar ATF 3403 M115, LT71141, ZF 5HP24, JLM20238, K17, 20292, 8432, 02JDE26444, WSS-M2C922A1
- JASO 1A-LV
- Land Rover LR023288
- Lexus |WS 3309
- MAN 339A, 339 Type V2, V1, Z2, Z1
- Mazda ATF D-II, M-III, M-V, FZ, F-1, S-1, N-1, 3317, T-IV
- **MB** 223.2, 236.1, 236.2, 236.10, 236.12, 236.14, 236.41, 236.5, 236.6, 236.7, 236.8, 236.9
- Mini Cooper T-IV, MINI P/N 83 22 0 402 413
- Mitsubishi Diaqueen SK, SP-II, SP-III, SP-IV, AW, J2, J3, ATF-MA1, PA
- NAG-1 (Chrysler, Jeep, Cherokee)
- Nissan Matic C, D, J, K, P, S, 402
- Porsche P/N 999 917 547 00 (A2), ZF 5HP16FL, 19FL, ZF 5HP20, LT71141, ATF 3403-M115, T-IV (JWS 3309), 000 043 205 09, 000 043 205 28
- SAAB T-IV. 3309. 93 165 147. 93 160 393
- **Saturn** T-IV, GM TASA, T-IV ATF, GM WS ATF, Saturn VI, 21005966, 1940700, 1940767, 22717466, 88900925, 93160393
- Shell L 12108, 3403 M115, LA2634, ETL-8072B, M-1375.4
- Subaru ATF 5AT, Dex II, AT OIL 5D06, ATF, ATF HP
- Suzuki ATF 2326, 2384K, JWS 3309, 3314, 3317, AT OIL 5D06
- Texaco 7045-E, 8072B, N402
- Toyota D-II, D-III, Hybrid, T-II, T-III, T-IV, WS
- Vickers M-2950-S, I-286-S
- Voith 55.6335 (G607), Svc Bltn #013 and #118
- Volvo 97325, 97335, CE 97340, CE97341/AT-101, CE 97342/AT-102, 1161521, 1161621, 1161540, 1161640, 31256774, 31256675
- Volvo Passenger Car (4 / 6 sp), Volvo 97340, 97341, 97342, P/N 1161540-8
- VW 5 HP ZF5 HP 30, 18FL, 19FL, 24A, G-055-025 A2, G-055-540, G-055-162 (ZF Lifeguardfluid 5), G-055-162-A2, A6 (ZF Lifeguardfluid 6 Plus), G-060-162 (ZF Lifeguardfluid 8), G US 000 162, TL 52540 A, VW G 052 162 A1, A2 A6, 099, VW TL52162 (LT71141)
- **ZF**; all 3 & 4 speed, 8 speed, 9 speed, ZF TE-ML 02F, 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 14C, 16L, 17C, 21L





KL-TF3040 KL-TF3060 KL-TF3080





KL-TF3082



KL-TF3084



KL-TF3090



KL-TF3095



KL-TF3099



DEXINO

DEXRON®-VI / MERCON® LV ATF Full Synthetic is OEM certified by General Motors and Ford.

Approvals:



MERCON® LV



CVT Fluid Full Synthetic is formulated for modern and legacy continuously variable transmissions. Do not use as a replacement for ATF.

- Audi/VW TL 52180; G 052 180; G 052 516
- Daihatsu Amix CVTF-DC; CVTF-DFE
- Dodge / Jeep NS-2; CVTF+4; Mopar CVT 4
- Ford CFT30/WSS-M2C933-A/Motorcraft XT-7-QCFT
- GM/Saturn DEX-CVT; CVTF I-Green2
- Honda HMMF; HCF-2
- Hyundai/Kia CVTF SP-CVT 1; SP-III
- Mazda CVTF 3320
- Mercedes Benz CVT28; MB 236.20
- BWW 83 22 0 136 176; 83 22 0 429 154 (EZL 799/EZL 799A)
- Mini Cooper EZL 799; EZL 799A; ZF CVT V1
- Mitsubishi DiaQueen CVTF-J1; CVTF-J4
- Nissan NS-1; NS-2; NS-3
- Punch EZL 799/EZL 799A
- Shell Green 1V
- Subaru iCVT; ECVT; Lineartronic CVT, CVT II, CVT III; High Torque (HT); CVTF LV
- Suzuki TC; NS-2; CVTF Green 1; CVTF Green 2; CVTF 3320
- Toyota CVTF TC; CVTF FE



KL-1F

Heavy Duty ATF Full Synthetic is formulated for high performance and long service life in heavy duty automatic transmissions in urban and rural commercial vehicles.









KL-TF3199

KL-TF3190

KL-TF3195

HD SYN DRIVE Full Synthetic Transmission Fluid is next generation, full synthetic automatic

Dual Clutch Full Synthetic Transmission Fluid is designed for use in dual clutch transmissions (DCT) used in high performance automobiles, specially engineered to deliver outstanding anti-shudder durability, shear stability, and oxidation control even when exposed to severe

Price:

transmission fluid, licensed by Allison Transmission for applications requiring TES-668® approved fluid. KL-TF3280







KL-TF3299

Price:





1 L BOTTLE KL-TF3540



SAE 40 Full Synthetic ES Transmission Lubricant is recommended for use use in modern manual and automated manual transmissions in late model highway tractors. Supersedes the requirements of previous generation SAE 50 grade product.





KL-TF3980

PAIL



KL-TF3995



Price:

SAE grade 50 and API Service Category MT-1.

SAE 50 Manual Transmission Full Synthetic is recommended for use in all applications specifying







DRUM KL-TF4080 KL-TF4085 KL-TF4090 KL-TF4095

Price:













SAE 10W TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and

stationary equipment where Caterpillar TO-4 or Allison C-4 fluids for SAE 10W grade are specified.

SAE 30 TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and stationary

KL-TF6090 KL-TF6080 Price:

KL-TF6095

KL-TF6099











Price:

SAE 50 TDTO-4 Transmission and Drivetrain Fluid is designed for heavy duty mobile and stationary equipment where Caterpillar TO-4 or Allison C-4 fluids for SAE 50 grade are specified.







PAII KL-TF6480



KL-TF6490



KL-TF6495



Price:

All Season Synthetic Blend TDTO-4 is an advanced multi-grade (10W-40) designed to use across a wide T° range in heavy duty mobile and stationary equipment where Caterpillar TO-4, TO-4M, or Allison C-4 fluids are specified.











KL-TF7090



KL-TF7095



KL-TF7096



KL-TF7080

Price:

All Season Synthetic TDTO-4 Transmission and Drivetrain Fluid is formulated using advanced 'Arctic Performance Technology' to deliver outstanding protection and performance. SAE 5W-30 multi-grade viscosity profile offers true all-season performance.







KL-TF7290



Price:

KL-TF7280

KL-TF7295

KL-TF7299

32

Transmission Fluids














KL-TF7495

KLONDIKE anti-wear hydraulic fluids are designed to operate in the most extreme conditions. Today, operating conditions require greater precision and pressure than ever before. While advanced systems do more work and are more responsive, they are also more vulnerable to wear and deposit formation when operated at higher temperatures and pressures. Highly tested KLONDIKE hydraulic lubricants are specially formulated with the finest base oils and additive systems that deliver unrivaled performance and protection.

Hydraulic Fluids









AW 22 Commercial Hydraulic Fluid is recommended for in use heavy duty mobile and stationary equipment in exploration, construction, logging and mining industries.









KL-HF0080 KL-HF0090

KL-HF0095

Price:













equipment in exploration, construction, logging and mining industries.



AW 32 Commercial Hydraulic Fluid is recommended for in use heavy duty mobile and stationary

KL-HD0295 KL-HF0299

Price:









KL-HF0290



AW 46 Commercial Hydraulic Fluid is recommended for in use heavy duty mobile and stationary

KL-HF0480

KL-HF0484

DRUM KL-HF0490

KL-HF0495

KL-HF0499

Price:



AW 68 Commercial Hydraulic Fluid is recommended for in use heavy duty mobile and stationary equipment in exploration, construction, logging and mining industries.





KL-HF0680 KL-HF0690





KL-HF0695

KL-HF0699

Price:

36

Hydraulic Fluids

AW 22 Advanced Formula Hydraulic Fluid is recommended for use in high pressure hydraulic

Price:





KL-HF1090





KL-HF1099



KL-HF1180

Red AW 22 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service specifying ISO 22 viscosity. Dyed red for better visibility.



Price:















Price:

KL-HF1280

KL-HF1290

KL-HF1295

KL-HF1299

Red AW 32 Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in

heavy duty and industrial service specifying ISO 32 viscosity. Dyed red for better visibility.

AW 32 Advanced Formula Hydraulic Fluid is recommended for use in high pressure hydraulic systems in all types of heavy duty and industrial service applications ensuring outstanding system







KL-HF1395

KL-HF1399

Price:



KL-HF1460

efficiency and extended service life. **5 OUART**



KL-HF1480





KL-HF1499

AW 46 Advanced Formula Hydraulic Fluid is recommended for use in high pressure hydraulic


KL-HF1490

KL-HF1495

Price:



AW 68 Advanced Formula Hydraulic Fluid is recommended for use in high pressure hydraulic systems in all types of heavy duty and industrial service applications ensuring outstanding system







Price:

KL-HF1680

KL-HF1690

KL-HF1695

KL-HF1699

AW 100 Advanced Formula Hydraulic Fluid is recommended for use in high pressure hydraulic systems in all types of heavy duty and industrial service applications ensuring outstanding system







efficiency and extended service life.



KL-HF1896



Price:

SAE 10W Heavy Duty AW Hydraulic Fluid is engineered for use in high pressure hydraulic systems subject to a wide range of climatic conditions and ambient temperatures.

Typically recommended for use in machinery manufactured by Caterpillar. KL-HF2080



KL-HF2099

Price:

Multi-Viscosity AW 15 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment operating in ultra-low temperatures.

Multi-Viscosity AW 22 with Arctic Performance Technology is formulated for high performance

hydraulic systems in mobile and stationary equipment across a broad temperature range.













BULK

KL-HF4880 KL-HF4890

KL-HF4895

KL-HF4899

Price:













DRUM KL-HF5080 KL-HF5090

KL-HF5095

KL-HF5099

Price:







KL-HF5299

KL-HF5280

Multi-Viscosity AW 46 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment across a broad temperature range.

Multi-Viscosity AW 36 with Arctic Performance Technology is formulated for high performance

hydraulic systems in mobile and stationary equipment across a broad temperature range.









KL-HF5480

KL-HF5490

KL-HF5495

Price:

Multi-Viscosity AW 68 with Arctic Performance Technology is formulated for high performance hydraulic systems in mobile and stationary equipment across a broad temperature range.

XVI All Season Syn Blend Extreme Hydraulic Fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty, industrial machines and mobile equipment. Very high viscosity index

and low pour point makes this the ideal fluid for all season use in mobile and stationary equipment.

Long Life Turbine Oil ISO 32 is a premium R+O fluid designed for use in non-geared steam, hydro-electric and gas turbines as well as a high temperature bearing lubricant and coolant.



PAIL KL-HF5680

Price:













KL-HF5780

PAIL

KL-HF5790

KL-HF5795

KL-HF5799

Price:





KL-HF6680








KL-HF6690

KL-HF6695

KL-HF6699

Price:







KL-HF6880 KL-HF6890

KL-HF6899

Price:

Long Life Turbine Oil ISO 68 is a premium R+O fluid designed for use in non-geared steam, hydro-electric and gas turbines as well as a high temperature bearing lubricant and coolant.

Long Life Turbine Oil ISO 46 is a premium R+O fluid designed for use in non-geared steam,







KL-HF7090



BULK KL-HF7099

KL-HF7080

Price:

Long Life Turbine Oil ISO 150 is a premium R+O fluid designed for use in non-geared steam, hydro-electric and gas turbines as well as a high temperature bearing lubricant and coolant.







KL-HF7490

KL-HF7499

Price:

Universal Tractor Fluid is the one single fluid that may be used to lubricate all conventional points on an agricultural or industrial tractor or piece of mobile equipment with a common sump.









KL-HF8075



KL-HF8080



KL-HF8084



KL-HF8090



KL-HF8095



KL-HF8060

Price:

Arctic Tractor Fluid Synthetic Blend is a low viscosity version of UTF and is designed to fulfill the torque transfer, hydraulic, and power transmission requirements of farm tractors and other mobile off-road equipment.











KL-HF8180 KL-HF8190 KL-HF8195

KL-HF8199

39

Price:









PAIL KL-HF8280 KL-HF8290

KL-HF8299

Price:













in all kinds of farm equipment, off-highway machinery, and industrial tractors.

PAIL KL-HF8480

KL-HF8490

KL-HF8495

KL-HF8499

Price:

Wet Brake Lubricant Full Synthetic is a specialized heavy duty fluid designed to fulfil VOLVO wet brake WB101 and WB102.

Universal Tractor Fluid Full Synthetic is formulated with Arctic Performance Technology for use

Universal Red Tractor Fluid is a specialized, advanced formulation designed to fulfill the torque transfer, hydraulic, and power transmission requirements of modern agricultural and other mobile







KL-HF8690

KL-HF8699

Price:

ISO 32 Full Synthetic Circulating Oil is a full synthetic multi-functional industrial oil. Excels as a high performance, long life lubricant in circulating, compressor, and turbine applications in the appropriate viscosity grade.

ISO 220 Full Synthetic Circulating Oil is a full synthetic multi-functional industrial oil. Excels as







TOTE KL-HF8795

Price:

a high performance, long life lubricant in circulating, compressor, and turbine applications in the appropriate viscosity grade.

KL-HF9280

KL-HF9299

Price:



ISO 460 Full Synthetic Circulating Oil is a full synthetic multi-functional industrial oil. Excels as a high performance, long life lubricant in circulating, compressor, and turbine applications in the appropriate viscosity grade.







DRUM KL-HF9490

KL-HF9495

KL-HF9499

Price:



ISO 680 Full Synthetic Circulating Oil is a full synthetic multi-functional industrial oil. Excels as a high performance, long life lubricant in circulating, compressor, and turbine applications in the appropriate viscosity grade.



KL-HF9690

Price:



The KLONDIKE family of industrial and functional fluids is formulated for exceptional performance and reliability using world-class technologies that have been trusted and proven by industry professionals for many years and is relied on by industry users all year round. Our bar and chain oil is of the highest quality and operates in extreme climatic - high or low temperature - conditions. It offers unsurpassed durability and performance for equipment operating in high heat conditions, and performs flawlessly in the logging and saw mill industries that require the most robust and durable lubricant formulations in order to maximize efficiency and productivity.

Industrial Oils





= Synthetic Blend



= Full Synthetic



Bar & Chain Oil is an economy fluid designed for the lubrication of chains, bars, and sprockets of chain saws.



KL-100650









KL-I00680 KL-100690

KL-100695

Price:

Hi-Tack ISO 90 Bar & Chain Oila is a professional low viscosity formula for winter use in all types of chain saws with manual or automatic oilers for lubrication of the bar, chain, and sprocket.







KL-I01060



KL-I01080



KL-I01090



KL-I01095



Price:

Hi-Tack ISO 150 Bar & Chain Oil is a professional medium viscosity formula for all-season use in all types of chain saws with manual or automatic oilers for lubrication of the bar, chain, and sprocket.



Price:





KL-I01280



KL-I01290



KL-I01295



KL-I01299

KL-I01260

Hi-Tack ISO 220 Bar & Chain Oil is a professional formulation designed for summer use in chain saws, open bearings, gears, and chains found in industrial applications or anywhere a tacky oil is













KL-I01460 KL-I01480

KL-I01490

KL-IO1495

KL-IO1499

43







KL-I01496

Industrial Oils





Price:

DRUM KL-I01390 KL-I01396

KL-I01399

mechanized saws operating in all climates and cutting all types of wood.

Rock Drill Oil ISO 32 is formulated for the internal mechanisms and moving parts of pneumatic equipment operating in heavy duty service environments where ISO 32 is specified.

Clear Bar and Chain Oil is manufactured with paraffinic base oils and high performance additives. They ensure reliable and consistent cutting performance in high performance hand-held and







KL-102280

KL-I02295

KL-102299

Price:

Rock Drill Oil ISO 68 is formulated for the internal mechanisms and moving parts of pneumatic equipment operating in heavy duty service environments where ISO 68 is specified.









KL-102680

KL-102690

KL-102695

KL-102699

Price:



Rock Drill Oil ISO 100 is formulated for the internal mechanisms and moving parts of pneumatic equipment operating in heavy duty service environments where ISO 100 is specified.





KL-102890



KL-102895



KL-102899

KL-I02880

Price:

Rock Drill Oil ISO 150 is formulated for the internal mechanisms and moving parts of pneumatic equipment operating in heavy duty service environments where ISO 150 is specified.











KL-103080 KL-103090

KL-103095

KL-103099

Price:

Industrial Oils



Rock Drill Oil ISO 220 is formulated for the internal mechanisms and moving parts of pneumatic equipment operating in heavy duty service environments where ISO 220 is specified.









KL-I03280 KL-103290

KL-I03295

KL-103299

Price:

ISO 100 Compressor Oil is formulated for reciprocating compressors requiring ISO 100 grade mineral based compressor oil.







KL-IO4195

KL-I04190

Price:

ISO 260 Natural Gas Compressor Oil is specifically designed for the lubrication of large, heavy duty reciprocating compressors pumping hydrocarbons such as natural gas.





KL-I04490





ISO 46

ISO 46 Compressor Oil Full Synthetic is designed for use in rotary screw, rotary vane, reciprocating, and centrifugal air compressors and vacuum pumps requiring ISO 46 synthetic lubricant.





KL-I05180

Price:



Non-Detergent 30 Lubricating Oil is recommended for use in air compressors and other industrial applications where non-detergent oil is specified.









KL-I05840 KL-I05880

KL-105890

KL-105899

Price:

46

Industrial Oils

Universal 2-Cycle is a premium low ash formula that promotes internal engine cleanliness and prolongs spark plug life in outdoor power equipment such as chain saws, trimmers, blowers and other machinery.





Price:

TC-W3

Price:

TC-W3 2-Cycle is a NMMA certified, virtually ashless engine oil formulated for use in high performance engines using pre-mix or mix-on-demand VRO oil delivery system applications requiring oil meeting API TC and/or JASO FB.








KL-106060



DRUM

KL-I06090



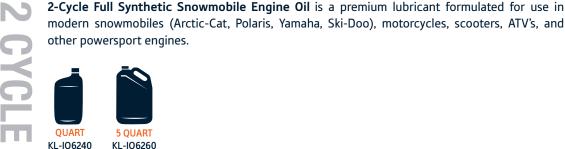



OUART KL-I06240

KL-106260

Price: **ISO 68**

ISO 68 Way Oil is specifically formulated for use in the lubrication of bearings, slides, and ways of machine tools such as lathes, planers, shapers, and tapping machines.





ISO 220







PAIL KL-107280

KL-107290

KL-107299







ISO 220 Way Oil is specifically formulated for use in the lubrication of bearings, slides, and ways of machine tools such as lathes, planers, shapers, and tapping machines.



CHEMICALS ANTIFREEZE

Industrial Oils



Soluble Cutting Oil is a water-soluble cutting fluid designed for long service life and low maintenance; and suitable for use on a wide range of materials and machining operations.



KL-107880

Price:

ISO 100

Tacky Saw Guide Oil ISO 100 is recommended for all types of thin kerf saw blades on modern gang saws and edgers.



KL-108390





KL-I08396



Price:

MULTI-USE

Multi-Use Industrial Cattle Oil is suitable for use in a wide range of applications such as cattle oiling systems, dust control in riding arenas, dust control in fertilizer plants, cedar shake preservative, concrete form release agent, and other similar industrial uses.



PAIL

KL-109580

Price:

Enhanced Form Oil is a clear, non-staining fluid designed for the easy release of concrete forms. Specially formulated for ease of use with all types of form materials.







KL-I09790



KL-109796

KL-I09799

Price: LIGHT

Light Form Release and Dust Suppressant Oil is a multi-purpose fluid designed as a wetting and release agent for concrete forms as well as an effective commercial dust suppressant liquid.



KL-109895 Price:

48

Industrial Oils



Dust Suppressant/Form Oil is colorless, odorless, neutral oil for dust suppression



KL-109995



Price:

49



KLONDIKE produces a range of unique robust and tacky **greases** that provide premium lubrication in difficult operating conditions and are tailored to industry requirements for improved productivity. They are specially engineered for environments with extreme temperature requirement, moisture and dirt contamination, heavy loads, extended maintenance intervals and other conditions that impact performance. Our greases are created with the finest base oils and additives in order to provide outstanding tackiness, lubrication and protection. These formulations will guard against oxidation and wear in extreme pressure and high temperature applications.

= Conventional



= Synthetic Blend



= Full Synthetic

Greases









nKL-GR1630 nKL-GR1680 nKL-GR1685

NANOTECHNOLOGY



Price:

KLONDIKE nano Calcium Sulfonate EP-1 Grease is formulated with calcium sulfonate complex and proprietary nanotechnology. Offers outstanding extreme pressure properties, corrosion and oxidation protection, and high resistance to moisture degradation.

KLONDIKE nano Full Synthetic EP-1.5 Grease is formulated for use in the most technical and demanding industrial, automotive, and heavy duty equipment applications. Supports a 45%



TUBE nKL-GR4630





KLONDIKE nano Calcium Sulfonate EP-2 Grease is formulated with calcium sulfonate complex and proprietary nanotechnology. Recommended for industrial, automotive, and heavy duty equipment applications.











Price:

TUBF nKL-GR4830 nKL-GR4880 nKL-GR4885 KL-GR4890





RED TAC EP-1 Grease is an advanced high performane multi-purpose formulation recommended for greasing applications of plain bearings, rolling elements, antifriction bearings, bushings and pins.



Greases



RED TAC EP-2 Grease is an advanced high performane multi-purpose formulation recommended for greasing applications of plain bearings, rolling elements, antifriction bearings, bushings and

SYN TAC EP-00 Synthetic Grease is an extreme pressure, multi-purpose, semi-fluid lithium





KL-GR0430



KL-GR0480






KL-GR0485

KL-GR0490

EP-00

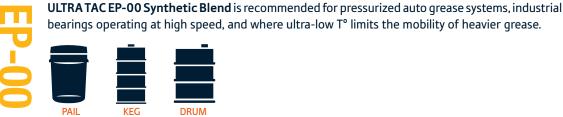






DRUM KL-GR0890





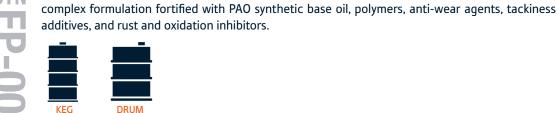




KL-GR0985

KL-GR0990

Price:











KL-GR1030 KL-GR1080

KL-GR1085

KL-GR1090

Price:



ULTRA TAC EP-1 Synthetic Blend is designed for heavy duty use in industrial, on- and off-road vehicle, and heavy equipment applications operating in extreme cold T° where NLGI 1 is specified. NLGI GC-LB certified.







KL-GR1480



KL-GR1485



KL-GR1490

KL-GR1496

NLGI

Price:



KL-GR1430

CHEMICALS ANTIFREEZE

Greases









KL-GR1848



KL-GR1880





ULTRA TAC EP-2 is designed for extreme duty use in a wide variety of industrial, on- and off-road


vehicle, and heavy equipment applications where NLGI 2 is specified. NLGI GC-LB certified.



VATIONAL LUBRICANT GREASE INSTITUTE NLGI GC-LB

Price:

MOLY













Price:



MOLY

MOLY TAC EP-1 is formulated with 3% molybdenum disulfide for use in heavy duty, shock loaded bearings and bushings in industrial or off-highway equipment where NLGI 1 is required.



KL-GR2430





KL-GR2485



Price:

MOLY TAC EP-2 is formulated with 3% molybdenum disulfide for use in heavy duty, shock loaded bearings and bushings in industrial or off-highway equipment where NLGI 2 is required.







KL-GR2830



KL-GR2880



KL-GR2885



KL-GR2890

Price:

MOLY BENTONE T

MOLY TAC Bentone High Temp EP-2 is recommended for use in kiln car wheel bearings, furnace door bearings, heat exchange motor bearings, oven conveyors and other application where extremely high temperatures are encountered.



Price:

Greases





sets operating in severely challenging environments.

KL-GR9080 KL-GR9085

KL-GR9090

Price:

Open Gear Lubricant is specially formulated to protect heavily loaded, slow moving, large open gear sets when used with spray type application system.

Open Gear Grease is engineered to protect extremely heavy loaded, slow moving, large open gear







KL-GR9280

KL-GR9290 KL-GR9285

Price:



Fifth Wheel Grease is designed to handle the severe load conditions of trailers sliding on and off Fifth wheel plates.



PAIL KL-GR8080

Price:

HD Hammer Grease is a specially designed extreme pressure grease paste for use in hydraulic hammers and impact tools. Calcium Sulfonate Complex fortified with copper and graphite lubricating solids form a durable protective film on contact and sliding surfaces for reduced galling, seizure, and wear.



TUBE KL-GR9630

Price:



Price:

Drill Rod Grease is designed to lubricate and protect long sections of drill rod and pipe operat in extreme conditions underground.




KL-GR9880



The KLONDIKE family of biodegradable lubricants are designed as an environmentally safer alternative to traditional industrial lubricants. With the rise in natural resource based industries being encouraged to monitor the impact and sustainability of the work completed in environmentally sensitive areas, the need for more environmentally safe and efficient products has increased. Our line of biodegradable lubricants are formulated using non-toxic chemistry with no heavy metals to contaminate water or soil, which will greatly reduce the immediate and longterm impact of the fluids on the environment in the event of an oil leak or spill. The KLONDIKE line of biodegradable lubricants are highly stable for smooth operational efficiency, and highly resistant to oxidation and deposit formation for long service life, while providing a high level of environmental conservation and protection.

Biodegradable Lubricants









ENVIRO AW 22 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 22 viscosity is specified.



KL-BL0195

KL-BL0180

Price:

ENVIRO AW 32 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 32 viscosity is specified.



KL-BL0280



KL-BL0290

KL-BL0190



KL-BL0295



Price:

ENVIRO AW 46 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or qear-type hydraulic pumps in heavy duty and industrial service where ISO 46 viscosity is specified.





DRUM

KL-BL0390



KL-BL0395



KL-BL0380

Price:

ENVIRO AW 68 Inherently Biodegradable Hydraulic Fluid is inherently biodegradable, non-toxic, environmentally friendly, with high dielectric strength. This fluid is recommended for vane, piston, or gear-type hydraulic pumps in heavy duty and industrial service where ISO 68 viscosity is specified.









KL-BL0480

DRUM KL-BL0490

KL-BL0495

Price:

Biodegradable Lubricants





ENVIRO MV 32 Anti-Wear Hydraulic Fluid is a high viscosity index, zinc free, inherently biodegradable, environmentally friendly, long life hydraulic fluid designed for high performance

performance hydraulic systems in mobile and stationary equipment where ISO 32 viscosity is

BIO AW 46 Readily Biodegradable Hydraulic Fluid is a non-toxic, ashless fluid designed for high performance hydraulic systems in mobile and stationary equipment where ISO 46 viscosity is


BIO AW 46 Synthetic Blend Hydraulic Fluid is a readily biodegradable, non-toxic, high performance

KL-BL1080

KL-BL1090

KL-BL1095

Price:

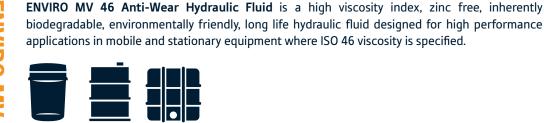






KL-BL1180 KL-BL1190

KL-BL1195

Price:



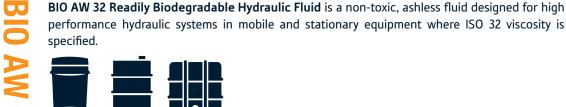





KL-BL1880

KL-BL1890

KL-BL1895

Price:









PAIL KL-BL1980

KL-BL1990

KL-BL1995

Price:



hydraulic oil designed for maximum performance and system protection in industrial and mobile hydraulic equipment.

KL-BL2780

Price:

Biodegradable Lubricants



BIO Synthetic EAL 32 uses premium bio-synthetic components for full compliance with environmentally acceptable lubricants requirements (EAL) and offers maximum performance and system protection in industrial and mobile hydraulic equipment operating in environmentally sensitive areas.





KL-BL3280

KL-BL3290

Price:

BIO Synthetic EAL 46 uses premium bio-synthetic components for full compliance with environmentally acceptable lubricants requirements (EAL) and offers maximum performance and system protection in industrial and mobile hydraulic equipment operating in environmentally sensitive areas.









KL-BL3480

KL-BL3495

Price:

BIO Synthetic HFDU FR46 Full Synthetic is a very high flash point formulation and is designed for maximum performance and system protection in industrial and mobile hydraulic equipment operating in extreme conditions and where fire risk is high.





PAIL

KL-BL3380

KL-BL3390

Price:

BIO Rock Drill Oil ISO 100 is a readily biodegradable, extreme pressure lubricant designed for the performance and protection of heavy duty pneumatic tools such as rock drills, breakers, jackhammers, and drifters as well as other surface and down-hole equipment.







KL-BL4390

KL-BL4380

Price:

BIO Rock Drill Oil ISO 150 is a readily biodegradable, extreme pressure lubricant designed for the performance and protection of heavy duty pneumatic tools such as rock drills, breakers, jackhammers, and drifters as well as other surface and down-hole equipment.



KL-BL4480 KL-BL4490

Price:





KLONDIKE FOOD-GRADE AW Hydraulic Fluids and EP-2 Grease are designed specifically for use in food processing equipment. These high-quality food grade fluids and greases provide maximum food safety and provide excellent protection against wear, ensuring long service life in the most demanding operating conditions.

FOOD-GRADE Lubricants



= Conventional



= Synthetic Blend



= Full Synthetic



FOOD-GRADE AW 32 Hydraulic Fluid is NSF H1 registered for incidental food contact. Recommended for industrial and mobile hydraulic equipment used in food processing equipment.





Price:



FOOD-GRADE AW 46 Hydraulic Fluid is NSF H1 registered for incidental food contact. Recommended for industrial and mobile hydraulic equipment used in food processing equipment.





KL-FG2480

KL-FG2490

Price:



FOOD-GRADE EP-2 Grease is a specially formulated NSF H1 registered product for use in production facilities where incidental food contact may occur.





KL-FG7030

KL-FG7085


Price:

FOOD-GRADE Lubricants

-	
-	
-	
-	
-	

CHEMICALS ANTIFREEZE

63

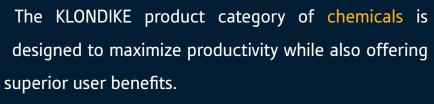


KLONDIKE Rust Blast is a professional strength, fast acting, penetrating lubricant. Powerful penetrating action blasts through rust and corrosion to loosen and lubricate stuck parts.

KLONDIKE Grease Blast is a truly versatile and certified biodegradable all-in-one degreaser. Simply alter the dilutions and it becomes a muscled water based engine degreaser, white wall tire cleaner, vinyl top cleaner, leather, plastic and vinyl cleaner, and a concrete floor degreaser.

KLONDIKE Brake Blast is an advanced formulation of highly technical solvents that once applied will quickly dissolve and remove grease, oil, brake fluid, road grime, and dirt. This non-chlorinated, low odor formula dries fast, leaves no residue, and is safe for use on most materials including plastics.









motor vehicles requiring DOT 3 fluid.

500 mL BOTTLE

KL-CH1034



KL-CH1040



Price:

DOT 4 High Performance Synthetic Brake Fluid is used in disc, drum, ABS brake systems, and hydraulic clutches of motor vehicles requiring DOT 4 fluid.

DOT 3 Synthetic Brake Fluid is used in disc, drum, ABS brake systems, and hydraulic clutches of







500 mL BOTTLE KL-CH1234

KL-CH1240

Price:

Universal Very High Performance DOT 5.1 Synthetic Brake Fluid is used in disc, drum, ABS brake systems, and hydraulic clutches of motor vehicles requiring Universal DOT 5.1, DOT 4, or DOT 3 fluid.









500 mL BOTTLE KL-CH1434

KL-CH1440

Price:

Power Steering Fluid is used as a top off or complete replacement fluid for most domestic and import vehicles using mineral base oil with rack and pinion design.





Price:

Antifreeze/Chemicals



Rust Blast Penetrating Lubricant is a professional strength, fast acting, penetrating lubricant. Powerful foaming action blasts through rust and corrosion to loosen and lubricate stuck parts.

AEROSOL KL-CH4030

Price:

Grease Blast Cleaner/Degreaser is a versatile, non-flammable, power-packed, highly effective degreaser for professional use. Certified biodegradable.







KL-CH6550 KL-CH6580

KL-CH6590

Price:

Brake Blast Brake Parts Cleaner is a non-chlorinated solvent designed to remove contaminants from brake parts quickly and easily. Surfaces dry residue free for improved, smooth brake performance.









AEROSOL

KL-CH8630 KL-CH8680

DRUM KL-CH8690

Price:

Green Universal Antifreeze - Concentrate is a low silicate, multi-purpose coolant, designed for automotive engines and heavy-duty diesel engines where low silicate formula with the addition of SCA's is preferred.











KL-CH8850

DRUM KL-CH8890

KL-CH8895

Price:

50/50

Green Universal Antifreeze - 50/50 Ready to Use is a low silicate, multi-purpose coolant, designed for automotive engines and heavy-duty diesel engines where low silicate formula with the addition of SCA's is preferred.







KL-CH8950

DRUM KL-CH8990

KL-CH8995

Price:

Antifreeze/Chemicals



Yellow Automotive OAT ELC Antifreeze - Concentrate is an advanced, multi-purpose, extended life coolant designed for automotive and light duty truck engine applications requiring OAT based extended life coolant.



KL-CH9050

E CONCENTRATE

YELLOW AUTOMOTIVE OAT

KL-CH9090



YELLOW AUTOMOTIVE OAT

Yellow Automotive OAT ELC Antifreeze - 50/50 Ready to Use is an advanced, multi-purpose, extended life coolant designed for automotive and light duty truck engine applications requiring OAT based extended life coolant.

Red Heavy Duty NOAT ELC Antifreeze - Concentrate is an advanced, multipurpose, nitrite








3.78 L IUG KL-CH9150

KL-CH9190

50/50 Price:

EC

RED HEAVY DUTY NOAT

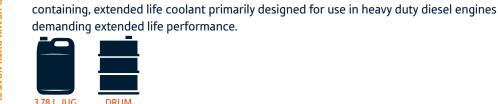



3.78 L JUG

KL-CH9250

KL-CH9290



RED HEAVY DUTY NOAT



Red Heavy Duty NOAT ELC Antifreeze - 50/50 Ready to Use is an advanced, multipurpose, nitrite containing, extended life coolant primarily designed for use in heavy duty diesel engines demanding extended life performance.









3.78 I IUG KL-CH9350

KL-CH9390

KL-CH9395

Price:



Gold All Engines NF OAT ELC Antifreeze - Concentrate is a highly advanced, multi-purpose, nitite free, extended life coolant designed for All heavy and light duty engine applications regardless of year, make, model, or original antifreeze color.





3.78 L IUG KL-CH9450

KL-CH9490

Price:

Antifreeze/Chemicals



GOLD ALL ENGINES NF OAT ELC 50/50

multi-purpose, nitite free, extended life coolant designed for All heavy and light duty engine applications regardless of year, make, model, or original antifreeze color.

3.78 L JUG





DRUM KL-CH9550 KL-CH9590

KL-CH9595

Price:

COMMERCIAL HD HOAT



Commercial HD HOAT ELC Antifreeze/Coolant - 50/50 Premix is an advanced, ethylene glycol based, extended life coolant primarily designed for use in heavy duty diesel engines demanding extended life performance.

Gold All Engines NF OAT ELC Antifreeze - 50/50 Ready to Use is a highly advanced,







KL-CH9750

KL-CH9790

KL-CH9795

Price:

TELC

69

Warranty

KLONDIKE Lubricants Corporation Warranty

KLONDIKE Lubricants Corporation warrants that at the time of sale, all lubricant, grease, and engine coolant products bearing the KLONDIKE brand meet their written product specifications and are free of defective materials, design, and workmanship.

The KLONDIKE warranty is in addition to, and does not invalidate, any warranty supplied by an original equipment manufacturer when used in accordance with the KLONDIKE written product recommendations and the original equipment manufacturers' written specifications**.

KLONDIKE is 100% committed to our customers. To support this commitment, KLONDIKE Lubricants Corporation will repair or replace equipment parts that have been damaged as a direct result of the failure of any of our products**.

**For specific warranty details and procedures, contact KLONDIKE Lubricants Corporation at info@klondikelubricants.com.

^{*} TRADEMARKS DISCLAIMER: All OEM product names and trademarks are the property of their respective owners, which are in no way associated or affiliated with KLONDIKE Lubricants Corporation.




Comparison Chart

KLONDIKE Cross-Reference Table

KLONDIKE®	Shell	Chevron	Petro Canada	Esso/ Mobil	Conoco-Phillips	Castrol	Total
AW Hydraulic Fluid	TELLUS S2 M	RANDO HD	HYDREX AW	NUTO H, DTE 20	HYDRAULIC AW, POWERFLOW AW, MEGAFLOW AW	HYSPIN AWS, PARADENE AW	TOTAL AW, AZOLLA ZS
Multi-Viscosity Hydraulic Fluid	TELLUS S2 V	RANDO HDX	HYDREX MV	UNIVIS HVI	POWERFLOW HE	HYSPIN HVI, DUAL RANGE HV	HYDRAGRI, EQUIVIS ZS
15W-40 CK-4 Engine Oil	ROTELLA T4	DELO 400 SDE	DURON HP, SHP	DELVAC SUPER, DELVAC ELITE	GUARDOL ECT, FLEET SUPREME EC	VECTON, CRB MULTI	RUBIA OPTIMA
0W-30/0W- 40/5W-40 CK-4 Full Synthetic Oil	ROTELLA T6	DELO 400 SYNTHETIC LE	DURON UHP	DELVAC 1 ESP	TRITON ECT, TRITON ARCTIC	N/A	RUBIA OPTIMA 1500
80W-90 GL-5 Gear Oil	SPIRAX S4	DELO GEAR, DELO GEAR ESI	TRAXON	MOBILUBE HD, ESSO GEAR GX	MP GEAR LUBE	AP GEAR OIL	DYNATRANS HD
75W-90/75W-140 Full Synthetic Gear Oils	SPIRAX S6 AXME	DELO GEAR HD, XDM	TRAXON -E SYNTHETIC	DELVAC 1 SYNTHETIC GEAR	SYNGEAR SS, SYNGEAR FE, SYNGEAR LDO	SYNGEAR	XRD FE, SYN NA
Universal Tractor Fluid	SPIRAX S4 TXM	TRACTOR FLUID 1000 THF	DURATRAN	HYDRAUL 56, MOBIL 424	POWERTRAN, POWERTRAN XP	UTF	DYNATRANS MP
TO-4 Drivetrain	SPIRAX S4 CX	DELO TORQFORCE	PRODURO	MOBILTRANS HD	POWERDRIVE FLUID	TRANS-C	DYNATRANS AC
EP-0, EP-1 & EP-2 Grease	GADUS S2 V220, S3 V220	ULTRA DUTY EP, ULTI PLEX EP, DELO GREASE	PRECISION, VULTREX	DELVAC XTREME, MOBILUX, UNIREX	MULTIPLEX, DYNALIFE	PYROPLEX BLUE, PYROPLOEX RED	MULTIS EP
Bar & Chain Oil ISO 90/150/220	CHAIN OIL	RED CHAIN BAR OIL	DURATAC	HD CHAIN OIL	SPECIAL BAR AND CHAIN	N/A	BAR & CHAIN
ENVIRO AW	TELLUS S3 M	CLARITY AW	ENVIRON AW	N/A	POWERFLOW NZ	HYSPIN ZZ	AZOLLA AF
ENVIRO MV	N/A	N/A	ENVIRON MV	DTE 10 EXCEL	POWERFLOW NZ HE	N/A	N/A
BIO AW 32, 46	N/A	N/A	N/A	N/A	N/A	BIO HE AW	N/A
BIO Rock Drill 100, 150	N/A	N/A	N/A	N/A	N/A	ECOTERRA ROCK DRILL	N/A

Viscosity Grades

KLONDIKE Viscosity Grade Chart

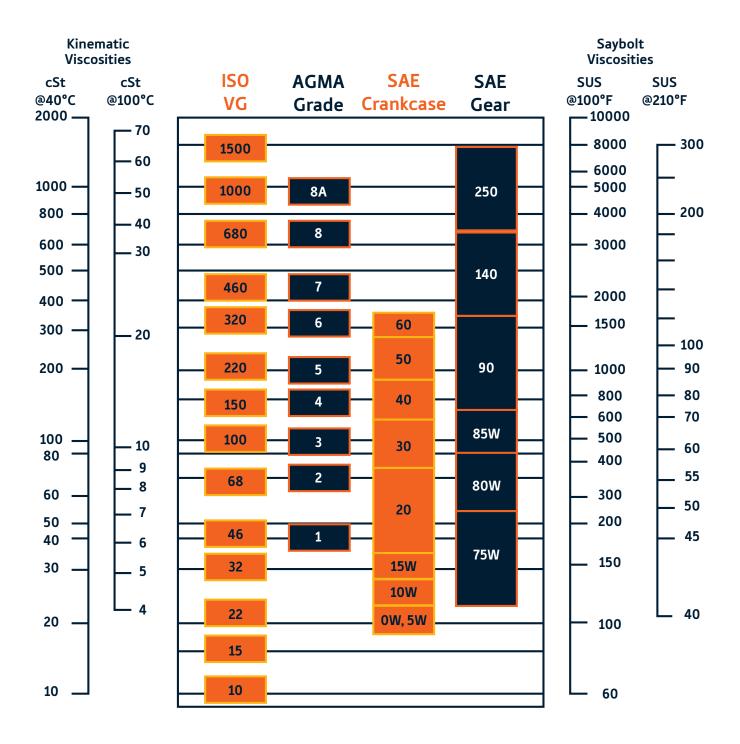

Notes



Notes

Notes

KLONDIKE Facilities

Dedicated to meeting the delivery needs of our customers, we have distribution and office facilities that are strategically located throughout Canada and the USA to cater to the time-sensitive nature of your industry.

BRITISH COLUMBIA

Serving BC

7708 80 St

Delta, BC V4G 1C1

Head Office

A330, 20161 86th Avenue Langley, BC V2Y 2C1

ALBERTA

Serving Northern BC, AB, SK, MB, YT and NT

4819 - 90 A Ave

Edmonton, AB T6B 2Y3

ONTARIO

Serving ON and North Eastern USA

370 Henry Street

Brantford, ON N3S 7W2

Office

Serving QC, NL and North Eastern USA

555 Lee Ave

QUEBEC

Baie-D'Urfe, QC H9X 3S3

390 Notre-Dame Street West Montreal, QC H2Y 1T9

NEW BRUNSWICK

Serving the Atlantic Provinces

350 English Dr

Moncton, NB E1E 3Y9

SALT LAKE CITY

Serving Western USA

2850 S 900 West

Salt Lake City, UT 84119

US Regional Office

107 N Ridgewood Drive

Post Falls, ID 83854

Spring/Summer 2024

KLONDIKE Lubricants Corporation

1-877-293-4691 • info@klondikelubricants.com • www.klondikelubricants.com

