


AI-STRAIGHT BUSBAR EXPANSION SUPPORT COUPLER WELDED WITH BASEPLATE (PI)

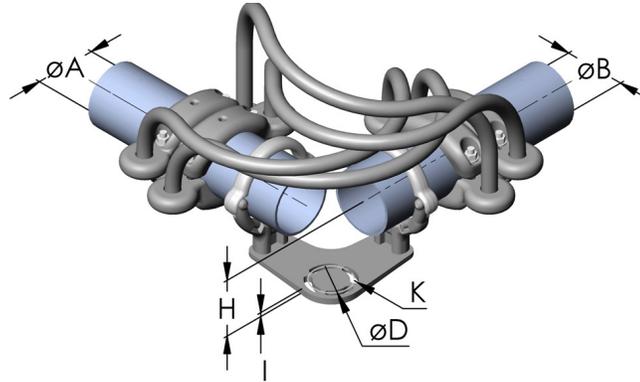

Catalog Number	Voltage	ØA ¹	ØB ¹	Height H	ØD	Diameter K	Flange-thickness I
LX0XK-064C	245 kV	60-63	60-63	90	76	14	15
LX0XK-079C	245 kV	80	80	90	120	14	12
LX0XK-080E	245 kV	80	80	100	120	14	12
LX0XK-081E	245 kV	80	80	100	76	14	15
LX0XK-100B	245 kV	100	100	110	127	18	12
LX0XK-100F	420 kV	100	100	100	127	18	12
LX0XK-113C	245 kV	114	114	130	127	18	12
LX0XK-114F	550 kV	114,3-120	114,3-120	130	225	18	15
LX0XK-121E	245 kV	120	120	130	127	18	12
LX0XK-160E	550 kV	160	160	160	127	18	15
LX0XK-161C	145 kV	160	160	130	127	18	15
LX0XK-162C	420 kV	160	160	130	127	18	15
LX0XK-163C	420 kV	160	160	150	127	18	15
LX0XK-164F	420 kV	160	160	130	225	18	15
LX0XK-165E	550 kV	160	160	150	127	18	12
LX0XK-166C	145 kV	160	160	150	127	18	12
LX0XK-167E	420 kV	160	160	150	254	18	12
LX0XK-168E	420 kV	160	160	150	254	18	12
LX0XK-169C	145 kV	160	160	150	254	18	12
LX0XK-200E	550 kV	200	200	175	225	18	15
LX0XK-201E	145 kV	200	200	177	140	14	12
LX0XK-203E	420 kV	200	200	180	127	18	15
LX0XK-204F	420 kV	200	200	165	225	18	12
LX0XK-220F	420 kV	220	220	225	225	18	15
LX0XK-252E	550 kV	250	250	225	225	18	15
LX0XK-253E	550 kV	250	250	225	254	18	15

¹ Dimensions are in millimeters. Please specify exact diameter in case of order.