




COYOTE® 8" & 10" PEDESTAL TERMINAL MOUNTING BRACKET KIT

INSTALLATION INSTRUCTIONS

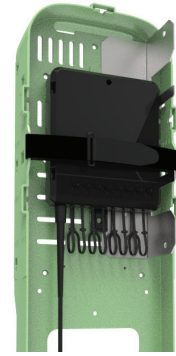


IMPORTANT SAFETY INFORMATION

READ AND COMPLETELY UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLING PRODUCT. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY OR DEATH.

This product is intended for use by trained technicians only. This product should not be used by anyone who is not familiar with and not trained to use it. When working in the area of energized lines, extra care should be taken to prevent accidental electrical contact. Be sure to wear proper safety equipment per your company protocol. These instructions are not intended to supersede any company construction or safety standards. These instructions are offered only to illustrate safe installation for the individual. PLP products are intended for the specified application only. Do not modify this product under any circumstances. Do not reuse or reinstall any PLP product unless that capability is expressly indicated in the product's Installation Instructions. For proper performance and personal safety, be sure to select the proper PLP product before installation. PLP products are precision devices. To ensure proper performance, they should be stored in cartons under cover and handled carefully.

PACKAGE COMPONENTS

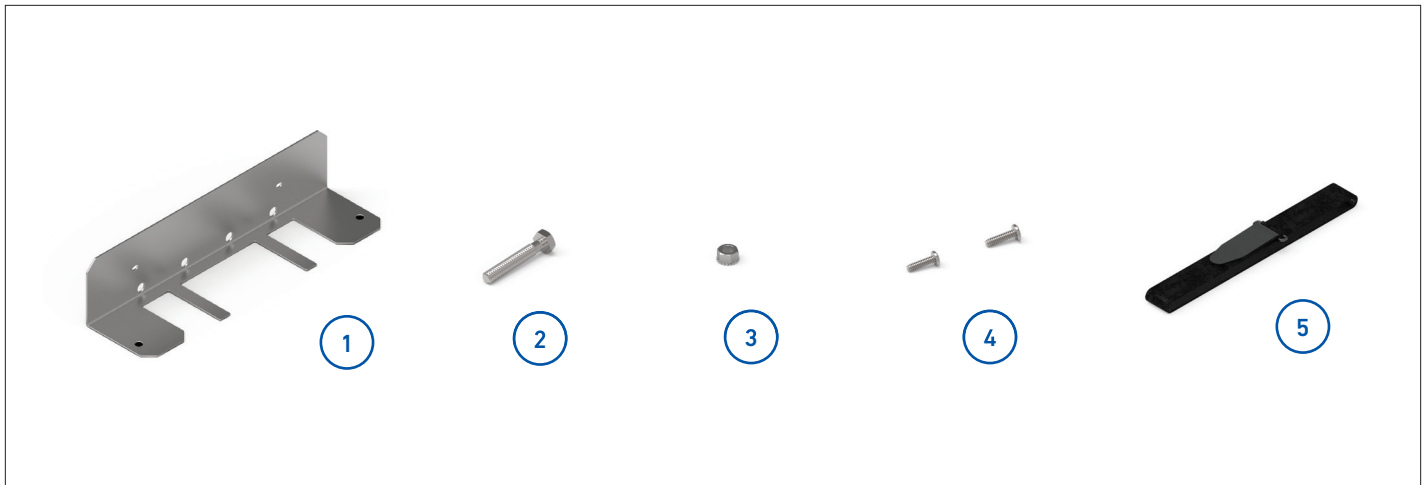


1. Terminal Bracket (1)
2. Bolt, 1/4-20 x 1-1/2" (1)
3. Keps Nut, 1/4-20 (1)
4. Screw, #6 x 1/2" (2)
5. Hold Down Strap (1)

Tools Required:


- 3/8" & 7/16" Can Wrench or Socket Wrench
- Phillips Head Screwdriver

- 1 Align the terminal bracket with the features in the organizer as shown.

NOTE: The terminal bracket can be installed on either the left or right side of the organizer.

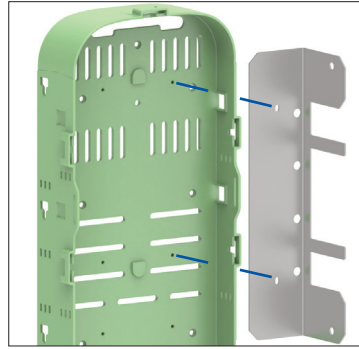


Right Side Installation


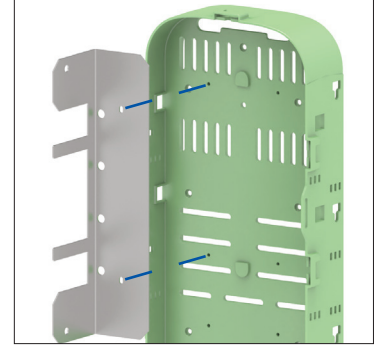


Left Side Installation

- 2 Secure the bracket to the organizer using the screws provided.

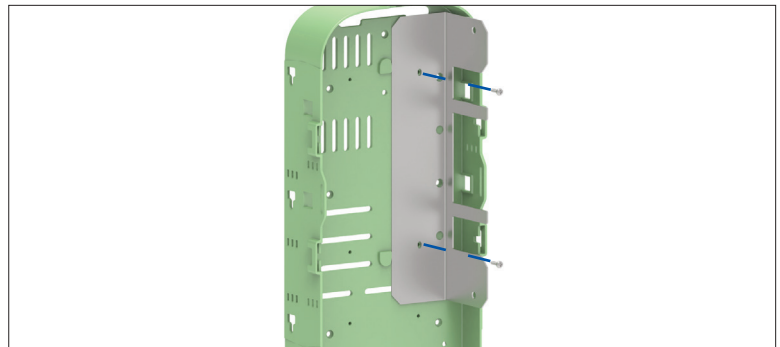


- 3 Install a Corning Evolv® Terminal by aligning the slots on the side with the terminal bracket.

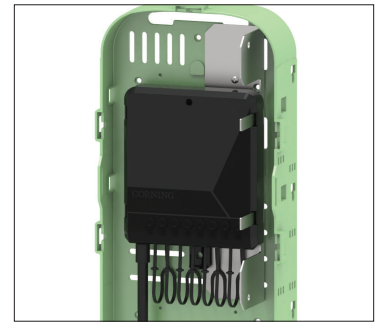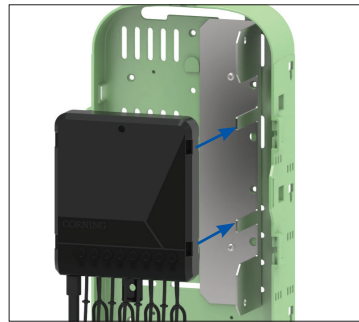

- 4 Secure the terminal to the organizer using the hold down strap.

NOTE: The terminal bracket will accept 2, 4, 6, 8, or 16-port Evolv Terminals.

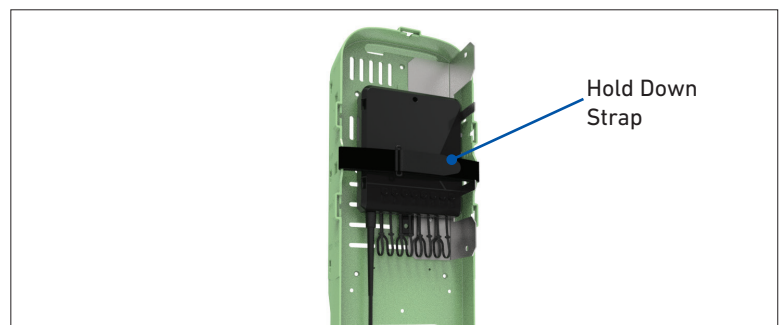


5

Hardened terminals can be secured to the terminal mounting bracket using the bolt and keps nut that is provided.

Install the bolt through the top hole of the bracket so the hex head is towards the outside of the pedestal.

NOTE: The terminal bracket will accept and manage up to an 8-port hardened terminal.

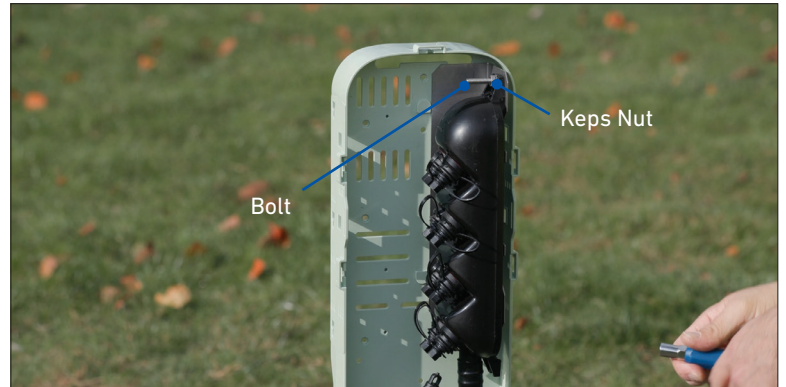



GLOBAL HEADQUARTERS
660 BETA DRIVE
CLEVELAND, OH 44143

+1 440 461 5200
INFO@PLP.COM
PLP.COM