



FIBERLIGN® ALUMINUM SUPPORT CROSS REFERENCE

- Each Aluminum Support includes one complete insert (two halves) for the stated cable range
- Additional inserts are sold as Insert Halves – see adjacent table

Legacy Catalog Number	New Catalog Number	Cable Diameter Range	
		in	mm
4450095	4450095A	0.226 – 0.275	5.7 – 6.9
4450096	4450096A	0.276 – 0.325	7.0 – 8.2
4450097	4450097A	0.326 – 0.375	8.3 – 9.4
4450098	4450098A	0.376 – 0.425	9.5 – 10.7
4450099	4450099A	0.426 – 0.475	10.8 – 12.0
4450100	4450100A	0.476 – 0.525	12.1 – 13.3
4450101	4450101A	0.526 – 0.575	13.4 – 14.6
4450102	4450102A	0.576 – 0.625	14.7 – 15.9
4450103	4450103A	0.626 – 0.675	16.0 – 17.1
4450104	4450104A	0.676 – 0.750	17.2 – 19.1
4450105	4450105A	0.751 – 0.825	19.2 – 21.0
4450106	4450106A	0.826 – 0.900	21.1 – 22.9
4450107	4450107A	0.901 – 0.975	23.0 – 24.8
4450108	4450108A	0.976 – 1.050	24.9 – 26.7
4450109		1.051 – 1.125	26.8 – 28.6
4450110		1.126 – 1.200	28.7 – 30.5
4450111		1.201 – 1.275	30.6 – 32.4
4450112		1.276 – 1.350	32.5 – 34.3
4450113		1.351 – 1.425	34.4 – 36.2
4450000	4450003	Housing Assembly Only	



Insert Halves

- Two Insert Halves are required for each support when ordered separately



Legacy Catalog Number	New Catalog Number	Cable Diameter Range	
		in	mm
00070241	00070446	0.226 – 0.275	5.7 – 6.9
00070236	00070447	0.276 – 0.325	7.0 – 8.2
00070237	00070448	0.326 – 0.375	8.3 – 9.4
00070238	00070449	0.376 – 0.425	9.5 – 10.7
00070239	00070450	0.426 – 0.475	10.8 – 12.0
00070125	00070451	0.476 – 0.525	12.1 – 13.3
00070126	00070452	0.526 – 0.575	13.4 – 14.6
00070127	00070453	0.576 – 0.625	14.7 – 15.9
00070128	00070454	0.626 – 0.675	16.0 – 17.1
00070129	00070455	0.676 – 0.750	17.2 – 19.1
00070130	00070456	0.751 – 0.825	19.2 – 21.0
00070131	00070457	0.826 – 0.900	21.1 – 22.9
00070132	00070458	0.901 – 0.975	23.0 – 24.8
00070133	00070459	0.976 – 1.050	24.9 – 26.7
00070134		1.051 – 1.125	26.8 – 28.6
00070135		1.126 – 1.200	28.7 – 30.5
00070136		1.201 – 1.275	30.6 – 32.4
00070137		1.276 – 1.350	32.5 – 34.3
00070138		1.351" – 1.425	34.4 – 36.2

DIMENSIONAL COMPARISON


Legacy FAS – Single Support for Urethane Inserts

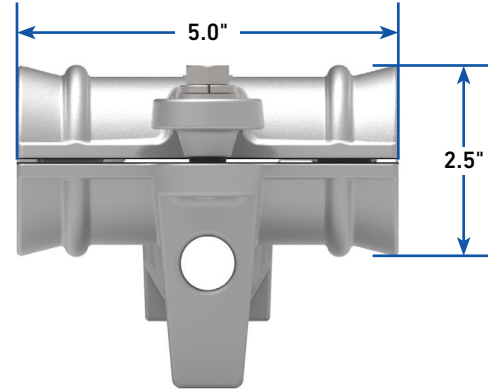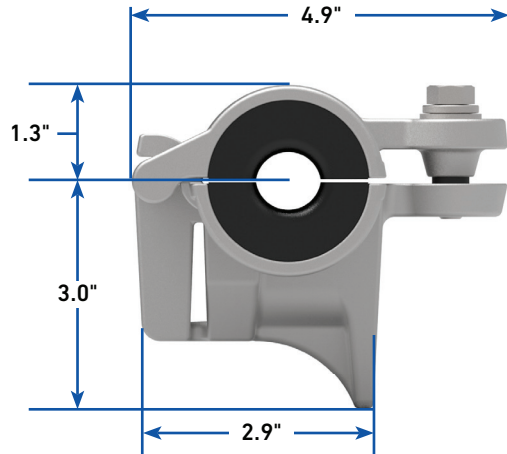


New FAS – Single Support for Neoprene Inserts

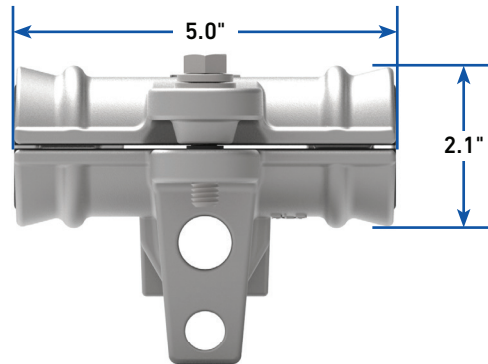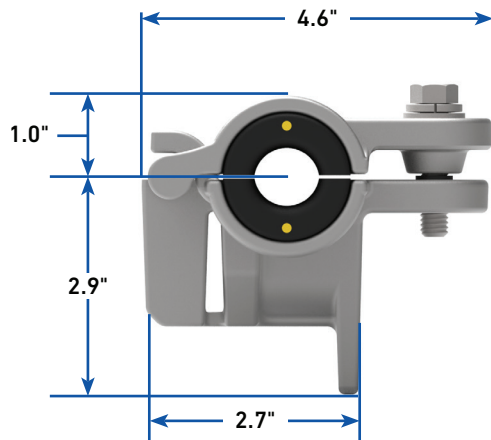


Stacked Supports

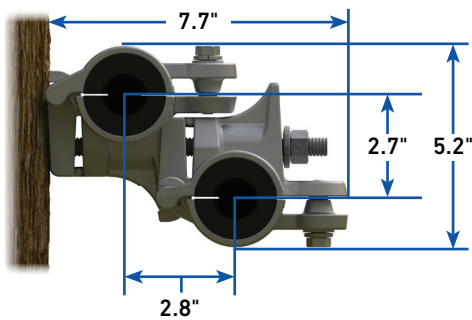

Stacked Legacy FAS

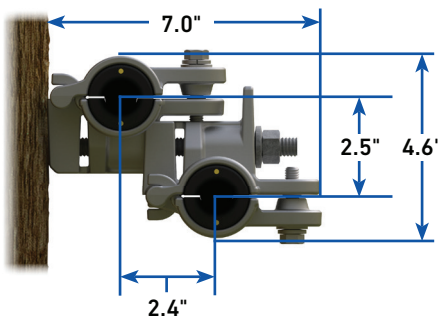

Stacked FAS

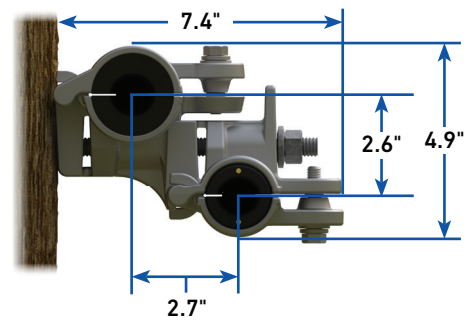

Stacked FAS with Legacy FAS



FIBERLIGN® ALUMINUM SUSPENSION CROSS REFERENCE

FIBERLIGN Aluminum Suspension without SRR

Catalog Number			Cable Diameter Range	
Legacy Suspension (includes insert)	Suspension (includes insert)	Suspension with Anchor Shackle & 5/8" - 11 Eye Nut	in	mm
4450195	4450195A	4450195AS	0.226 – 0.275	5.7 – 6.9
4450196	4450196A	4450196AS	0.276 – 0.325	7.0 – 8.2
4450197	4450197A	4450197AS	0.326 – 0.375	8.3 – 9.4
4450198	4450198A	4450198AS	0.376 – 0.425	9.5 – 10.7
4450199	4450199A	4450199AS	0.426 – 0.475	10.8 – 12.0
4450200	4450200A	4450200AS	0.476 – 0.525	12.1 – 13.3
4450201	4450201A	4450201AS	0.526 – 0.575	13.4 – 14.6
4450202	4450202A	4450202AS	0.576 – 0.625	14.7 – 15.9
4450203	4450203A	4450203AS	0.626 – 0.675	16.0 – 17.1
4450204	4450204A	4450204AS	0.676 – 0.750	17.2 – 19.1
4450205	4450205A	4450205AS	0.751 – 0.825	19.2 – 21.0
4450206	4450206A	4450206AS	0.826 – 0.900	21.1 – 22.9
4450207	4450207A	4450207AS	0.901 – 0.975	23.0 – 24.8
4450208	4450208A	4450208AS	0.976 – 1.050	24.9 – 26.7
4450209			1.051 – 1.125	26.8 – 28.6
4450210			1.126 – 1.200	28.7 – 30.5
4450211			1.201 – 1.275	30.6 – 32.4
4450212			1.276 – 1.350	32.5 – 34.3
4450213			1.351 – 1.425	34.4 – 36.2
4450001	4450004	Housing Assembly Only		
710010357	710010357	Anchor Shackle and 5/8" - 11 Eye Nut		
AS-5L	AS-5L	Anchor Shackle Only		
710010577	710010577	5,000 lb Limited Tension Banding Bracket		

FIBERLIGN Aluminum Suspension Insert Halves

Legacy Catalog Number	New Catalog Number	Cable Diameter Range	
		in	mm
00070241	00070446	0.226 – 0.275	5.7 – 6.9
00070236	00070447	0.276 – 0.325	7.0 – 8.2
00070237	00070448	0.326 – 0.375	8.3 – 9.4
00070238	00070449	0.376 – 0.425	9.5 – 10.7
00070239	00070450	0.426 – 0.475	10.8 – 12.0
00070125	00070451	0.476 – 0.525	12.1 – 13.3
00070126	00070452	0.526 – 0.575	13.4 – 14.6
00070127	00070453	0.576 – 0.625	14.7 – 15.9
00070128	00070454	0.626 – 0.675	16.0 – 17.1
00070129	00070455	0.676 – 0.750	17.2 – 19.1
00070130	00070456	0.751 – 0.825	19.2 – 21.0
00070131	00070457	0.826 – 0.900	21.1 – 22.9
00070132	00070458	0.901 – 0.975	23.0 – 24.8
00070133	00070459	0.976 – 1.050	24.9 – 26.7
00070134		1.051 – 1.125	26.8 – 28.6
00070135		1.126 – 1.200	28.7 – 30.5
00070136		1.201 – 1.275	30.6 – 32.4
00070137		1.276 – 1.350	32.5 – 34.3
00070138		1.351 – 1.425	34.4 – 36.2

FIBERLIGN Aluminum Suspension with SRR

- Two insert halves are required for insert when ordered separately.

Catalog Number			Cable Diameter Range	
Legacy Suspension (includes insert)	Suspension (includes insert)	Suspension with Anchor Shackle & 5/8"-11 Eye Nut	in	mm
4470199	4470199A	4470199AS	0.426 – 0.475	10.8 – 12.0
4470200	4470200A	4470200AS	0.476 – 0.500	12.1 – 12.7
4470201	4470201A	4470201AS	0.501 – 0.550	12.8 – 14.0
4470202	4470202A	4470202AS	0.551 – 0.625	14.1 – 15.9
4470203	4470203A	4470203AS	0.626 – 0.700	16.0 – 17.8
4470204	4470204A	4470204AS	0.701 – 0.737	17.9 – 18.6
4470205	4470205A	4470205AS	0.738 – 0.812	18.7 – 20.6
4470206			0.813 – 0.887	20.7 – 22.5
4470207			0.888 – 0.962	22.6 – 24.4
4470208			0.963 – 1.037	24.5 – 26.3
4470209			1.038 – 1.112	26.4 – 28.2
4470210			1.113 – 1.187	28.3 – 30.1

NOTE: To order the Housing Assembly and other components separately, refer to the FIBERLIGN Aluminum Suspension without SRR table.



FIBERLIGN® ALUMINUM SUSPENSION COMPARISON

Characteristic	FASN without SRR		FASN with SRR	
	FASN	Legacy FASN	FASN	Legacy FASN
Insert Type	Neoprene	Urethane	Neoprene	Urethane
Compatible with Both Insert Types	No	No	No	No
Color Coded Inserts	Yes	No	Yes	No
Minimum Acceptable Cable Diameter	0.226" (5.7 mm)	0.226" (5.7 mm)	0.426" (10.8 mm)	0.426" (10.8 mm)
Maximum Acceptable Cable Diameter	1.050" (26.7 mm)	1.425" (36.2 mm)	0.812" (20.6 mm)	1.187" (30.1 mm)
Catalog Number for Equivalent Cable Diameter Range	4450195A	4450195	4470199A	4470199
	↓	↓	↓	↓
	4450208A	4450208	4450205A	4470205
	Not Available*	4450209	Not Available*	4470206
		↓		↓
		4450213		4470210
Overall Housing Length	5.00" (127 mm)	5.00" (127 mm)	5.00" (127 mm)	5.00" (127 mm)
Overall Housing Width	2.14" (54 mm)	2.51" (64 mm)	2.14" (54 mm)	2.51" (64 mm)
Overall Housing Height	4.51" (115 mm)	4.92" (125 mm)	4.51" (115 mm)	4.92" (125 mm)

*Larger cable diameters not available in the FASN are able to be accommodated with the Legacy FASN.

DIMENSIONAL COMPARISON

Legacy FASN – Single Suspension for Urethane Inserts

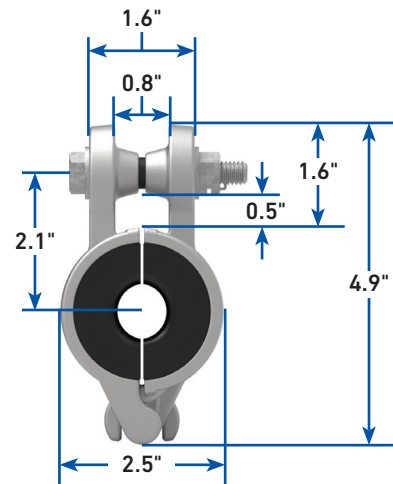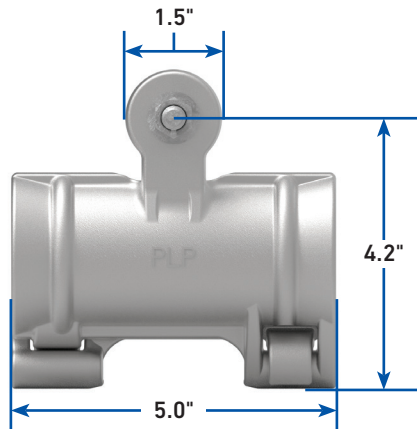

FASN – Single Suspension for Neoprene Inserts

