


## BALL CLEVIS

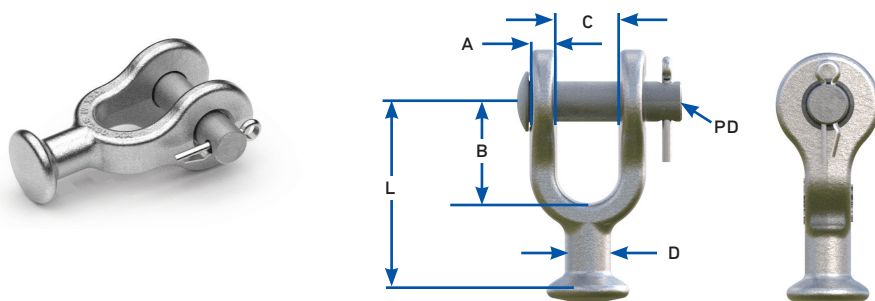


| Component  | Material                         |
|------------|----------------------------------|
| Body       | Ductile Iron, Hot Dip Galvanized |
| Hardware   | Galvanized Steel                 |
| Cotter Pin | Stainless Steel                  |

| Catalog Number | General Dimensions |                |            |            |              |          | For Use with Insulators per ANSI Class Spec. C-29.2-71 | Vertical Ultimate Strength | Weight     |
|----------------|--------------------|----------------|------------|------------|--------------|----------|--------------------------------------------------------|----------------------------|------------|
|                | in (mm)            |                |            |            |              |          |                                                        | lbf (kN)                   | lb (kg)    |
|                | A                  | B              | C          | D          | L            | PD       |                                                        |                            |            |
| BC-30          | 7/16 (11)          | 1-9/16 (39.7)  | 15/16 (24) | 11/16 (18) | 2-15/16 (74) | 5/8 (16) | 52-3 and 52-5                                          | 30,000 (133)               | 0.8 (0.34) |
| BC-50          | 5/8 (16)           | 1-15/16 (49.2) | 15/16 (24) | 7/8 (22.6) | 4-3/8 (111)  | 3/4 (19) | 52-8 and 52-11                                         | 50,000 (222)               | 1.9 (0.86) |

For bolt, nut, and cotter in place of clevis pin and cotter, add BNK to the catalog number (Ex: BC-30BNK).

## BALL CLEVIS LINK

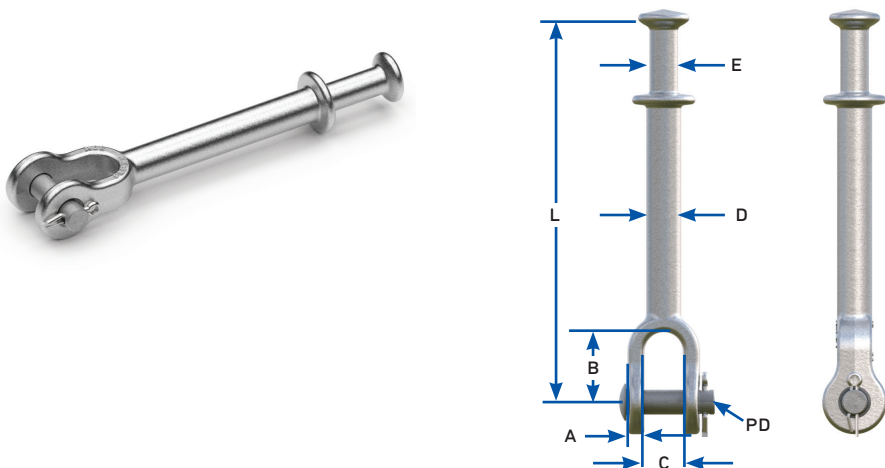

| Component  | Material                         |
|------------|----------------------------------|
| Body       | Forged Steel, Hot Dip Galvanized |
| Hardware   | Galvanized Steel                 |
| Cotter Pin | Stainless Steel                  |

| Catalog Number | General Dimensions |              |            |            |            |               |          | For Use with Insulators per ANSI Class Spec. C-29.2-71 | Vertical Ultimate Strength | Weight    |
|----------------|--------------------|--------------|------------|------------|------------|---------------|----------|--------------------------------------------------------|----------------------------|-----------|
|                | in (mm)            |              |            |            |            |               |          |                                                        | lbf (kN)                   | lb (kg)   |
|                | A                  | B            | C          | D          | E          | L             | PD       |                                                        |                            |           |
| BCL-30         | 7/16 (11)          | 1-3/4 (44.5) | 15/16 (24) | 7/8 (22.2) | 11/16 (18) | 9-5/8 (15.9)  | 5/8 (16) | 52-3 and 52-5                                          | 30,000 (133)               | 2.2 (1.0) |
| BCL-50         | 9/16 (14.3)        | 1-3/4 (44.5) | 15/16 (24) | 15/16 (24) | 7/8 (22.6) | 10-1/8 (25.6) | 7/8 (22) | 52-8 and 52-11                                         | 50,000 (222)               | 3.3 (1.5) |

For bolt, nut, and cotter in place of clevis pin and cotter, add BNK to the catalog number (Ex: BCL-30BNK).