


SOCKET CLEVIS

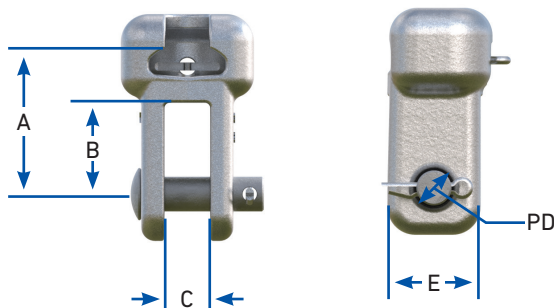


Component	Material
Body	Forged Steel, Hot Dip Galvanized
Hardware	Galvanized Steel
Cotter Pin	Stainless Steel

Catalog Number	General Dimensions					For Use with Insulators per ANSI Class Spec. C-29.2-71	Vertical Ultimate Strength	Weight
	in (mm)						lbf (kN)	lb (kg)
	A	B	C	E	PD			
SC-5194	2-5/8 (67)	1-5/8 (41)	13/16 (21)	1-5/8 (42)	5/8 (16)	52-3 and 52-5	30,000 (133)	2.2 (1)
SC-50	3-3/8 (86)	2-1/4 (57)	1-1/8 (28)	2-1/16 (53)	7/8 (22)	52-8 and 52-11	50,000 (222)	3.8 (1.7)

For bolt, nut, and cotter in place of clevis pin and cotter, add BNK to the catalog number (Ex: SC-5194BNK).

SOCKET EYE

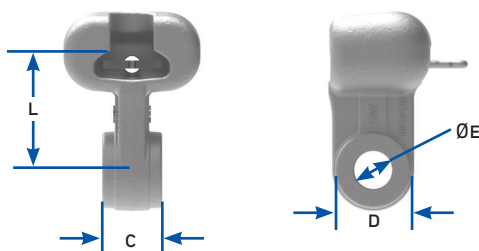

Component	Material
Body	Forged Steel, Hot Dip Galvanized
Hardware	Galvanized Steel
Cotter Pin	Stainless Steel

Catalog Number	General Dimensions				For Use with Insulators per ANSI Class Spec. C-29.2-71	Vertical Ultimate Strength	Weight
	in (mm)					lbf (kN)	lb (kg)
	C	D	E	L			
SE-5150	17/32 (13.5)	1-25/32 (45)	11/16 (17.5)	2-3/32 (53.2)	52-3 and 52-5	15,000 (67)	1.2 (0.55)
SE-5152	3/4 (19.1)	1-1/2 (38.1)	11/16 (17.5)	2-3/32 (53.2)		25000 (111)	1.3 (0.59)
SE-5154	1-1/16 (26.9)	1-1/2 (38.1)	13/16 (20.6)	2-3/32 (53.2)		25000 (111)	1.6 (0.73)
SE-5155	2-1/8 (54.0)	1-1/2 (38.1)	13/16 (20.6)	2-3/32 (53.2)		30000 (133)	2.1 (0.95)
SE-5156	1-3/32 (27.8)	1-1/2 (38.1)	11/16 (17.5)	2-1/4 (57.2)		25,000 (111)	1.6 (0.73)
SE-5157	1-1/8 (28)	1-25/32 (45)	11/16 (17.5)	2-5/16 (58.7)		30,000 (133)	1.7 (0.75)
SE-5158	3-1/4 (82.6)	2 (50.8)	25/32 (19.8)	3-3/8 (85.7)	52-8 and 52-11	50,000 (222)	4.4 (1.98)
SE-6109	2-3/4 (69.9)	1-29/32 (48.4)	13/16 (20.6)	2 (50.8)	52-3 and 52-5	30,000 (133)	2.7 (1.24)
SE-9002	1-1/2 (38.1)	2 (50.8)	25/32 (19.8)	2-5/8 (66.7)	52-8 and 52-11	50,000 (222)	3.0 (1.35)
SE-9016	2-1/4 (57.2)	2 (50.8)	13/16 (20.6)	2-21/32 (67.4)	52-8 and 52-11	50,000 (222)	3.4 (1.54)
SE-9020	5/8 (15.9)	1-25/32 (45)	11/16 (17.5)	2 (50.8)	52-3 and 52-5	30,000 (133)	1.5 (0.68)
SE-9021	3/4 (19.1)	1-25/32 (45)	11/16 (17.5)	2 (50.8)		30,000 (133)	1.6 (0.71)
SE-9022	1-1/4 (31.8)	1-25/32 (45)	11/16 (17.5)	2 (50.8)		30,000 (133)	1.8 (0.84)
SE-9023	1-3/4 (44.5)	1-25/32 (45)	11/16 (17.5)	2 (50.8)		30,000 (133)	2.1 (0.96)
SE-9024	2-1/4 (57.2)	1-25/32 (45)	11/16 (17.5)	2 (50.8)		30,000 (133)	2.4 (1.08)