

## COYOTE® DEFENDER 2


### BALLISTIC PROTECTION

The COYOTE Defender 2 provides added protection for 6.5" COYOTE Dome Closures with the FIBERLIGN® OPGW CRB System that are mounted vertically on a pole or structure. It consists of a mounting base and a hinged door that swings open for easy access to the splice closure.

### FEATURES AND BENEFITS

- Provides ballistic protection for 6.5" x 17" and 6.5" x 22" COYOTE Dome Closures with the FIBERLIGN OPGW CRB System
- Weighs a third less than the COYOTE Defender without sacrificing the level of ballistic protection
- Both the mounting base and the hinged door have a 7 gauge steel thickness and weighs under 37 lb
- Steel components are galvanized or zinc plated to prevent corrosion
- Can be bolted or banded directly to a pole/structure with 5/8" through bolts, 5/8" double-arming bolts, or 1-1/4" steel banding
- Can be mounted to the SLACKLOOP® 60" Cable Storage to provide slack cable storage

## COMPONENTS

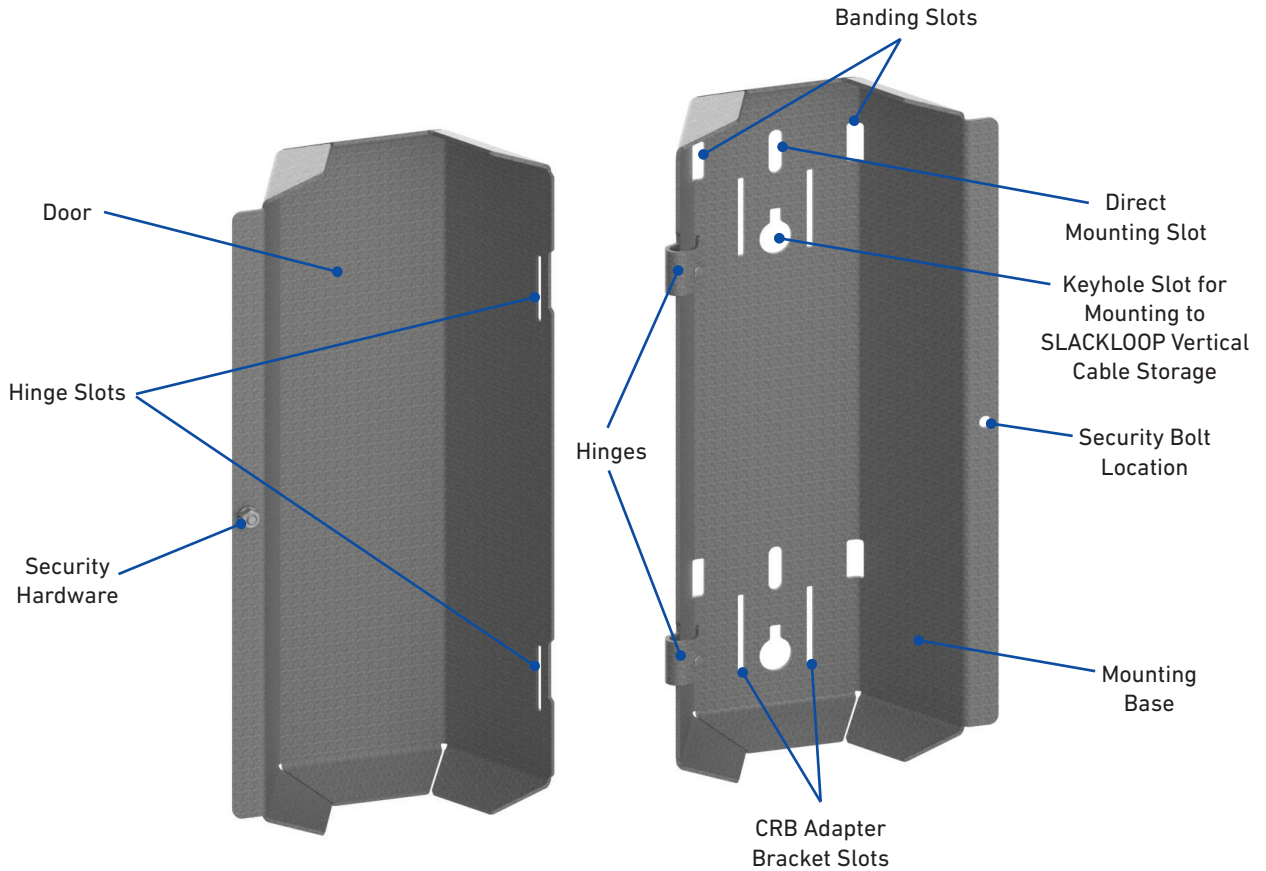

## ORDERING INFORMATION

- 5/8" through bolts, 5/8" double-arming bolts, and banding are not supplied with the kits listed below.
- The Lattice Tower Clamp Kit is used for mounting the SLACKLOOP® 60" Cable Storage and the Defender directly to lattice towers with tower members up to 1-1/8" thick. Do not order Lattice Tower Clamp Kits for pole mounting applications.

### COYOTE Defender 2 with Vertical SLACKLOOP System Configurations

Component	6.5" COYOTE Dome Closures with FIBERLIGN OPGW CRB Applications	
	Qty	Catalog Number
COYOTE Defender 2	1	80061194
SLACKLOOP® 60" Cable Storage	1	80061195
Lattice Tower Clamp	2	LTC-1