

HB-A CONTINUED

Aluminum Bolted Tee

Tube to Pad

230kV and Below

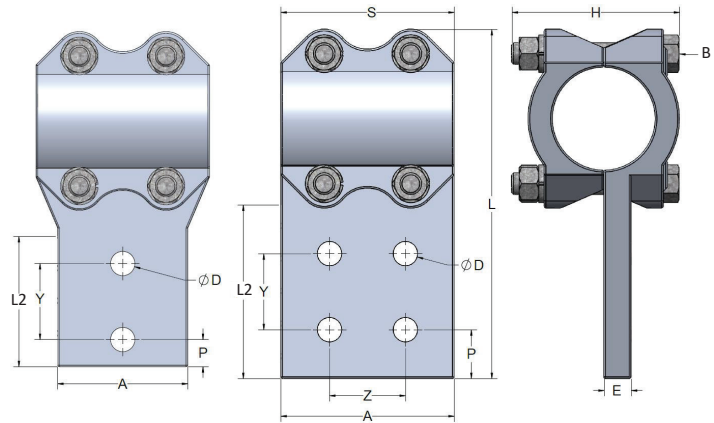


Figure 1

Figure 2

Part Number	Figure	Tube NPS Diameter	Dimensions									
			in (mm)									
			A	D	E	H	L	L2	P	S	B	Y/Z
HB43A-2N	1	3	3.00 (76)	0.56 (14.3)	0.67 (17)	5.35 (136)	8.82 (244)	3.00 (76)	0.63 (16)	5.00 (127)	5/8 (16)	1.75 (44)
HB43A-4N	2	3	3.00 (76)	0.56 (14.3)	0.67 (17)	5.35 (136)	8.82 (244)	3.00 (76)	0.63 (16)	5.00 (127)	5/8 (16)	1.75 (44)
HB43A-4N4	2	3	4.00 (102)	0.56 (14.3)	0.67 (17)	5.35 (136)	9.61 (244)	4.00 (102)	1.14 (29)	5.00 (127)	5/8 (16)	1.75 (44)
HB44A-4N	2	3-1/2	3.75 (95)	0.56 (14.3)	0.67 (17)	5.35 (136)	10.35 (263)	3.00 (76)	0.63 (16)	5.51 (140)	5/8 (16)	1.75 (44)
HB44A-4N4	2	3-1/2	4.00 (102)</									

