TANDEM CRESCENDO

TAS FLOORING

WPC | 8.0 MM, 20 MIL

Construction	WPC Vinyl Click, Wood Plastic Composite
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	5" Wide x 60" Long (125 mm x 1500 mm)
Overall Thickness	8.0 mm (Includes 1.5 mm IXPE Pad)
Attached Pad	1.5 mm
Wear Layer	20 mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed-In-Register
Edge Profile	Painted Bevel
Packaging	14.13 sf/ctn, 7 pcs/ctn, 21.1 lbs/ctn, 98 ctn/plt, 1384.7 sf/plt

Installation & Maintenance

Angle / Angle

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition Required for rooms Larger than: (50) L x (50) W

Ambient & Surface: Acclimate product to environment.
Work out of multiple boxes. Subfloors dry and flat (3/16" in 10')
Hydroponic Radiant Heat Systems only

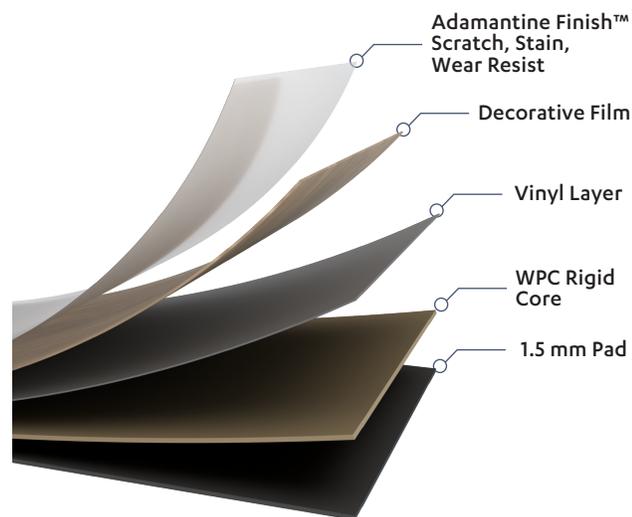Maintenance: No Polish, Fresh Floors by TAS Flooring

Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified
Phthalate Free

Adamantine Finish™ Scratch, Stain, Wear Resist

Decorative Film

Vinyl Layer

WPC Rigid Core

1.5 mm Pad

Warranty

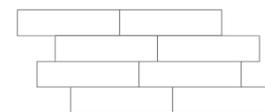10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
QNose Stair Nosing

Layout Options:

ASHLAR

STAGGER

floor score
SCScertified

PHTHALATE FREE

Hydronic Heat

Adamantine™ Protection

Floating Angle/Angle

Additional specifications, full installation instructions & warranty information available online at **TASFLOORING.COM**

A division of **TAS supply company**, Inc.