

FRONTIER

GLUE DOWN | 5 MM, 20 MIL

TAS CONTRACT

TASCONTRACT.COM

FRONTIER

GLUE DOWN | 5 MM, 20 MIL



VERSATILE INSTALLATION OPTIONS

Frontier offers the flexibility of a glue-down or loose-lay installation, making it adaptable for various multifamily applications while maintaining a secure and stable fit.

DESIGN-FORWARD DIMENSIONS

Wide 7.25" x 48" planks with an embossed texture and micro bevel edge deliver a natural wood look ideal for modern multifamily interiors.

ENHANCED **DURABILITY & PROTECTION**

Engineered with a 20 mil light commercial wear layer and polyurethane finish for superior scratch resistance and long-term performance.

SEAMLESS TRANSITIONS

At 5.0 mm thick, Frontier minimizes floor height transitions to adjacent surfaces like carpet or tile, helping maintain a cohesive design across units.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.



QNose



IONA
LUXURY VINYL

VRLV0101
5 MM | 20 MIL



SANDOVAL
LUXURY VINYL

VRLV0102
5 MM | 20 MIL



CHURCHILL
LUXURY VINYL

VRLV0103
5 MM | 20 MIL



BANDERIN
LUXURY VINYL

VRLV0104
5 MM | 20 MIL



FORSYTH
LUXURY VINYL

VRLV0105
5 MM | 20 MIL



LOGAN
LUXURY VINYL

VRLV0106
5 MM | 20 MIL



ROCKBRIDGE
LUXURY VINYL

VRLV0107
5 MM | 20 MIL



KODIAK
LUXURY VINYL


VRLV0108
5 MM | 20 MIL

FRONTIER

TAS FLOORING

GLUE DOWN | 5.0 MM, 20 MIL

Construction	Luxury Vinyl Plank
Classification	ASTM F1700, Class III, Type B
Dimensions	7.25" Wide x 48" Long (185 mm x 1226 mm)
Overall Thickness	5.0 mm
Wear Layer	20 mil
Finish Coat	Polyurethane
Texture	Random Embossed-In-Register & Smooth
Edge Profile	Micro Bevel
Packaging	21.97 sf/ctn, 9 pcs/ctn, 41.2 lbs/ctn, 55 ctn/plt, 1208.5 sf/plt

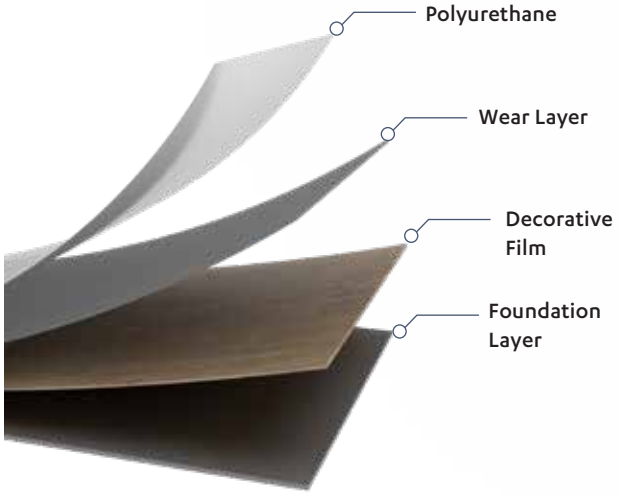

Installation & Maintenance

Glue Down, Loose-Lay

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Wax, Neutral PH cleaner, such as TAS Flooring Fresh Floors.

Recommended Adhesive: -Dynamic, Transitional Pressure Sensitive, firm set
-Pinnacle, Premium Transitional Pressure Sensitive, hard set

Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Health & Environmental

FloorScore SCS Certified
Phthalate-Free

Warranty

10 Year Light Commercial, 30 Year Multifamily Residence, Lifetime Residential


Accessories

QNose Stair Nosing

Layout Options:

NOT TO SCALE



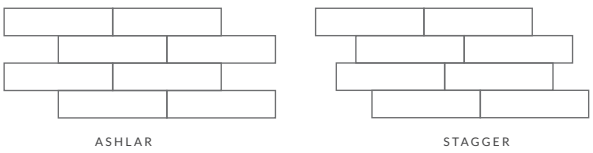

floor score SCScertified

PHTHALATE FREE

Hydronic Heat

Waterproof

Glue

TAS CONTRACT


T A S
CONTRACT
TASCONTRACT.COM
PLATFORMS
LUXURY VINYL
Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.