





Oslo | Pewter
 TK600012



Ozart | Greige
 TK600312

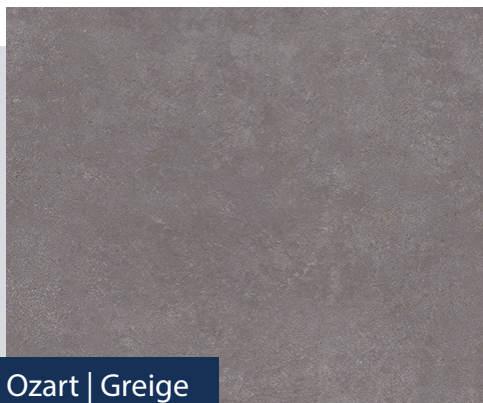

Strata | Cashmere
 TK600712

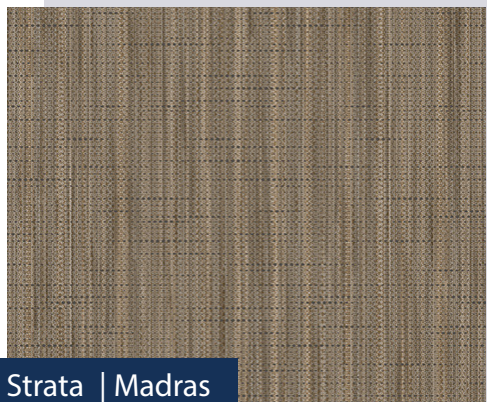

Strata | Madras
 TK600722



Aria | Glacier
 TK600812



Aria | Lunar
 TK600822

Product Details

Width: 12'

Standard Roll Size: 100 sq.yd

Total Thickness: 0.080" (2.03 mm)

Wear Layer: 20 mil (0.5 mm)

Surface Treatment: Techtonic Polyurethane

Installation Method: Glue-Down or Loose-Lay

Warranty: Limited Lifetime Residential,
 15 Yr Light Commercial

FloorScore Certified



Waterproof



Stain Resistant



Scratch & Dent
 Resistant



Comfortable &
 Quiet



Main Street
 Commercial



Easy Installation



FloorScore
 Certified



Asthma &
 Allergy Friendly

Heat Welding
 Approved