

EXPLORER

SPC 5.0 MM, 20 MIL

Construction	Luxury Vinyl Plank
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 48" Long, 177.8 mm x 1219.2 mm
Overall Thickness	5 mm
Wear Layer	20 mil High-Density Polyurethane
Finish Coat	Enhanced Ceramic Bead Coating
Texture	Embossed
Edge Profile	4-sided Square Edge
Packaging	23.35 sf/carton - 50 cartons/pallet - 1167.5 sf/pallet

Installation & Maintenance

Glue Down, Loose Lay

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as Fresh Floors by TAS Flooring.

Recommended Adhesive: WF Taylor Dynamic, Uzin KE39.
For Heavy Loads use WF Taylor Pinnacle


Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Health & Environmental

FloorScore Certified # SCS-FS-05749

Phthalate Free

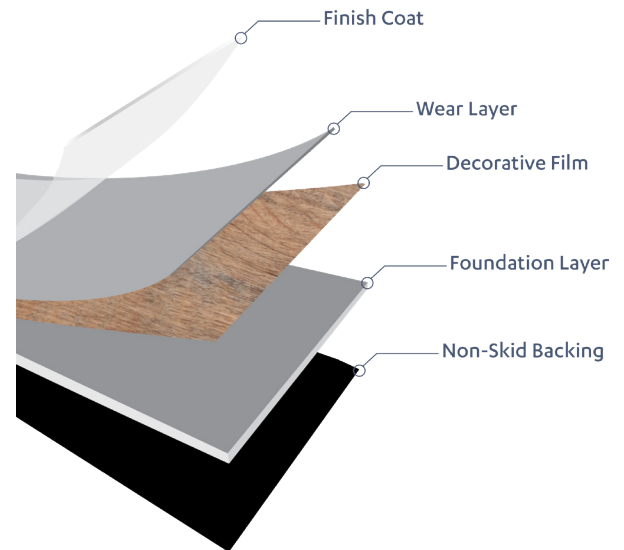

Warranty

15 Year Light Commercial, 15 Year Multifamily, Lifetime Residential

Layout Options:

