



TITAN WOOD

HYBRID HARDWOOD | 7.2 MM, 1.2 MM

T A S

CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

TITAN WOOD

HYBRID HARDWOOD | 7.2 MM, 1.2 MM VENEER



WATERPROOF ENGINEERED HARDWOOD

The Titan Wood Collection features a waterproof core that provides superior protection against moisture, making it a robust and reliable choice for light commercial spaces where water resistance is important.



REAL WOOD VENEER

Crafted with a genuine wood veneer, the Titan Wood Collection delivers the natural beauty and warmth of hardwood paired with the resilience of an SPC construction.



TITAN TOUGH WEAR LAYER

The Titan Wood Collection is fortified with an advanced wear layer featuring Aluminum Oxide, providing exceptional resistance to dents, scratches, and daily wear. This durable surface ensures long-lasting performance.

TRIMS & TRANSITIONS

- T-Mold
- Endcap
- Reducer
- Quarter Round

QNose Stair Nosing is made from the same material as your flooring selection, allowing for better coordination with your installed floors.





CRONUS
HYBRID HARDWOOD

WBTIH13
7.2 MM | 1.2 MM VENEER



HYPERIAN
HYBRID HARDWOOD

WBTIH12
7.2 MM | 1.2 MM VENEER



OCEANUS
HYBRID HARDWOOD

WBTIOA10
7.2 MM | 1.2 MM VENEER



RHEA
HYBRID HARDWOOD

WBTIOA19
7.2 MM | 1.2 MM VENEER



TETHYS
HYBRID HARDWOOD

WBTIOA18
7.2 MM | 1.2 MM VENEER



THEMIS
HYBRID HARDWOOD

WB TIOA21
7.2 MM | 1.2 MM VENEER

TITAN WOOD

HYBRID HARDWOOD | 7.2 MM, 1.2 MM

Construction	Waterproof Hybrid Hardwood
Species	American Hickory, European White Oak
Dimensions	7.5" Wide x 75" Long, 190 mm x 1900 mm
Overall Thickness	7.2 mm (includes pad)
Attached Pad	1.0 mm Premium IXPE Pad
Veneer Thickness:	1.2 mm Sliced
Surface Finish	Titan Tough wear layer with aluminum oxide
Design Feature	Brushed
Edge Profile	4-Sided Micro Bevel
Packaging	15.54 sf/ctn, 4 pcs/ctn, 40.8 lbs/ctn, 60 ctn/plt, 932.4 sf/plt

Installation & Maintenance

Float or Glue, Angle/Angle, Horizontal Tap

Ambient & Surface Temperature at Installation: Acclimate product to environment.

Work out of multiple boxes. Subfloors dry and flat (3/16" in 10').

Installation on or below grade concrete requires 6 mil moisture barrier.


Maintenance: No Wax, Neutral PH cleaner such as TAS Flooring Fresh Floors

Recommended Adhesive: -Dynamic, Transitional Pressure Sensitive, firm set
-Pinnacle, Premium Transitional Pressure Sensitive, hard set

Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

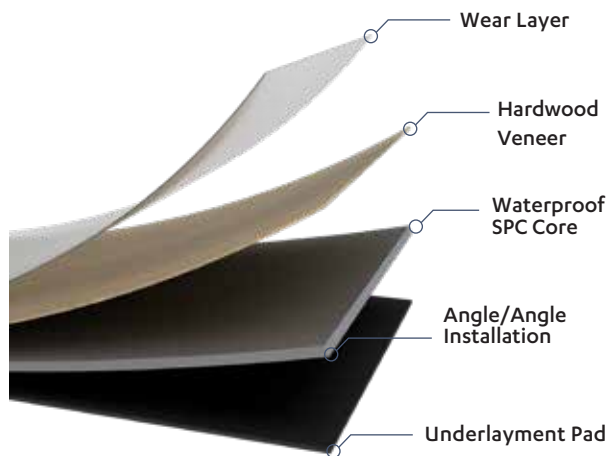

Warranty

10 Year Light Commercial, 50 Year Residential

Accessories

Trims: End Cap, Quarter Round, Reducer, and T-Mold

[QNose](#) Stair Nosing

Health & Environmental

FloorScore SCS Certified

Carb Phase II Compliant



TAS
CONTRACT
TASCONTRACT.COM



HARDWOOD
COLLECTIONS



Scan the QR Code to view all hardwood flooring available with TAS Contract.