



CAPITAL

LAMINATE | 12 MM, + 2.0MM PAD

T A S

CONTRACT

TASCONTRACT.COM

CAPITAL

LAMINATE | 12 MM, + 2.0 MM PAD | 9.5" X 60"



ADAMANTINE PROTECTION

The Capital Collection features Adamantine Protection, offering high scratch resistance to maintain its pristine appearance in high-traffic areas. Built to withstand the demands of modern living, this flooring is ideal for builders, developers, multifamily, and property management projects seeking durability and longevity.



WIDE AND LONG PLANKS

With planks measuring 9-1/2" wide by 60" in length, the Capital Collection enhances the visual appeal of any space after installation. Its wide and long dimensions create a seamless and spacious look, perfect for open floor plans in multifamily and commercial properties.



TRANSITIONAL EASE

Say goodbye to transitions with the Capital Collection. With rooms up to 66' x 66', no transitions are necessary, offering a smooth and cohesive flooring solution for builders, developers, and property management professionals.



STUNNING COLOR PALETTE

Choose from a beautiful range of colors with a low gloss finish, curated to perfection for a stunning and designer-selected aesthetic. The Capital Collection's nature-inspired color palette adds elegance and sophistication to any residential or commercial space, ensuring a timeless appeal that impresses clients and tenants alike.

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.



QN
QNoise



TOPEKA
WATER RESISTANT CORE LAMINATE

SCLA0201
12 MM | 2.0 MM PAD



AUGUSTA
WATER RESISTANT CORE LAMINATE

SCLA0202
12 MM | 2.0 MM PAD



LANSING
WATER RESISTANT CORE LAMINATE

SCLA0203
12 MM | 2.0 MM PAD



LINCOLN
WATER RESISTANT CORE LAMINATE

SCLA0204
12 MM | 2.0 MM PAD



ALBANY
WATER RESISTANT CORE LAMINATE

SCLA0205
12 MM | 2.0 MM PAD



HARRISBURG
WATER RESISTANT CORE LAMINATE

SCLA0206
12 MM | 2.0 MM PAD



RICHMOND
WATER RESISTANT CORE LAMINATE

SCLA0207
12 MM | 2.0 MM PAD



JACKSON
WATER RESISTANT CORE LAMINATE

SCLA0208
12 MM | 2.0 MM PAD

Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	9.5" Wide x 60" Long
Overall Thickness	14 mm (includes 2.0 mm EVA Pad)
Attached Pad	2.0 mm EVA Pad
Wear Surface	AC4 Rated
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	23.29 sf/ctn, 44 ctn/plt. 1024.8 sf/plt

Installation & Maintenance

Angle/Angle

Transition: Transition required for rooms larger than 66' W x 66' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit


Maintenance: No Polish, Fresh Floors by TAS Flooring.

Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	
*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.		

Health & Environment

FloorScore SCS Certified
GreenGuard Gold
Adamantine Protection

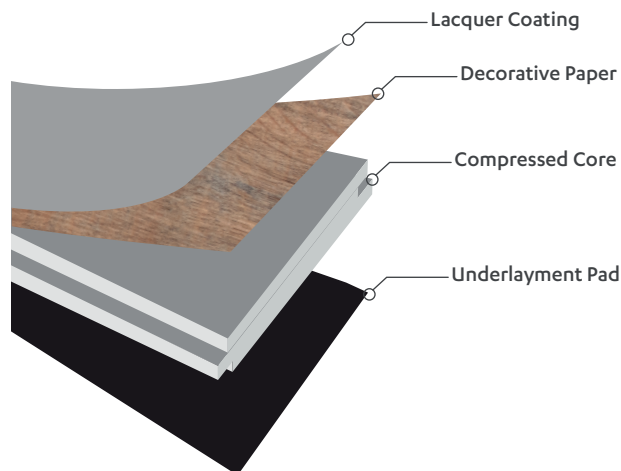

Warranty


15 Yr Light Commercial, 15 Yr Limited Multi-Family, Lifetime Residential, 80 hour Topical

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:

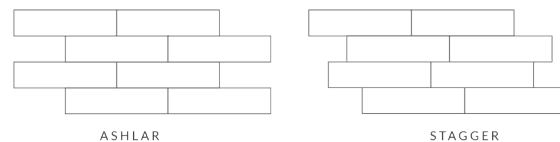

TAS

CONTRACT

TASCONTRACT.COM

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.