

LAMINATE 8 MM + 2 MM ATTACHED PAD

Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	7.5" Wide x 60" Long, 198 mm x 1510 mm
Overall Thickness	10 mm (includes 2 mm EVA pad)
Attached Pad	2.0 mm EVA Sound Abatement Pad
Wear Surface	AC3
Texture	Embossed
Edge Profile	4-Sided Painted Bevel with AquaSeal
Packaging	25.75 sf/carton - 55 cartons/pallet - 1416 sf/pallet

Installation & Maintenance

Angle / Angle

Transition: Transition required for rooms larger than 66' W x 66' L.

Installation on or below grade concrete requires 6 mil moisture barrier

Maintenance: No Polish, Bruce Hardwood and Laminate Cleaner


Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

FloorScore Certified
Carb Phase 2 Compliant

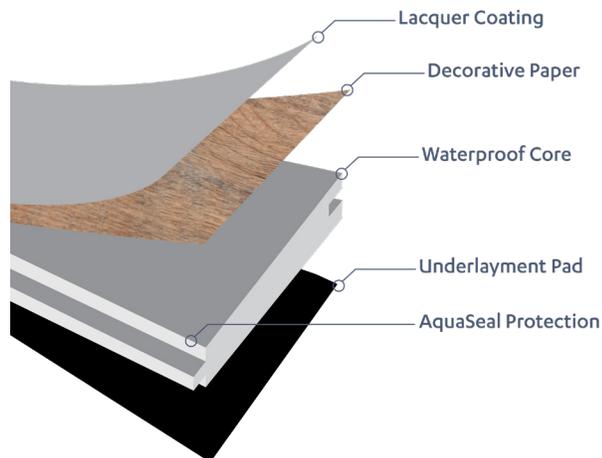


Warranty

80-Hour Topical Water Resistance
25 Yr Residential, 5 Yr Limited Commercial,
5 Yr Limited Multi-Family

Accessories:

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

Layout Options:

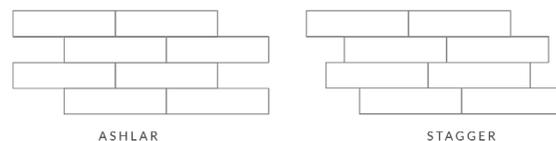

80-Hour Topical

Additional Specifications, Full Installation Instructions & Warranty Information Available Online | pacmat.com