



# AGATEWOOD

SPC | 6.0 MM, 20 MIL

TAS

CONTRACT

TASCONTRACT.COM

# AGATEWOOD

SPC | 6.0 MM, 20 MIL | 9" X 60"



## SCRATCH RESISTANT

With a robust 20 mil wear layer, the Agatewood Collection offers superior scratch resistance, making it an excellent choice for homes with pets or common area foot traffic.



## PAINTED BEVEL

The painted bevel enhances the wood appearance of each plank, adding depth and dimension to the flooring surface. This meticulous attention to detail elevates the overall aesthetic of any space.



## WIDE & LONG PLANKS

Featuring wider 9" and longer 60" planks, the Agatewood Collection creates an illusion of spaciousness, making rooms appear larger and more luxurious. This design element enhances the overall ambiance and sophistication of the home.

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**EAGLEDALE**  
SPC RIGID CORE

SCRC0101  
6.0 MM | 20 MIL



**WINDSONG**  
SPC RIGID CORE

SCRC0102  
6.0 MM | 20 MIL



**BLAKLEY**  
SPC RIGID CORE

SCRC0103  
6.0 MM | 20 MIL



**WINDSLOW**  
SPC RIGID CORE

SCRC0104  
6.0 MM | 20 MIL



**HAWLEY**  
SPC RIGID CORE

SCRC0105  
6.0 MM | 20 MIL



**FLETCHER**  
SPC RIGID CORE

SCRC0106  
6.0 MM | 20 MIL



**TRACYTON**  
SPC RIGID CORE

SCRC0107  
6.0 MM | 20 MIL



**FERNCLIFF**  
SPC RIGID COREZ

SCRC0108  
6.0 MM | 20 MIL

## SPC | 6.0 MM, 20 MIL

Construction	SPC, Stone Polymer Composite, Rigid Core
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	9" Wide x 60" Long, 228 mm x 1524 mm
Overall Thickness	6.0 mm (Includes 1.5 mm pad)
Attached Pad	1.5 mm IXPE Sound Abatement Pad
Wear Layer	20 mil
Finish Coat	Low Gloss, Polyurethane
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	22.44 sf/carton - 56 cartons/pallet - 1256.6 sf/pallet

### Installation & Maintenance

Angle / Angle, Float

Layout Room size: 1/4" Expansion required at perimeter and at all vertical surfaces.  
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: No Polish, TAS Flooring Fresh Floors

### Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.


### Health & Environmental

FloorScore Certified

Phthalate-Free



Additional Specifications, Full Installation Instructions & Warranty Information Available Online

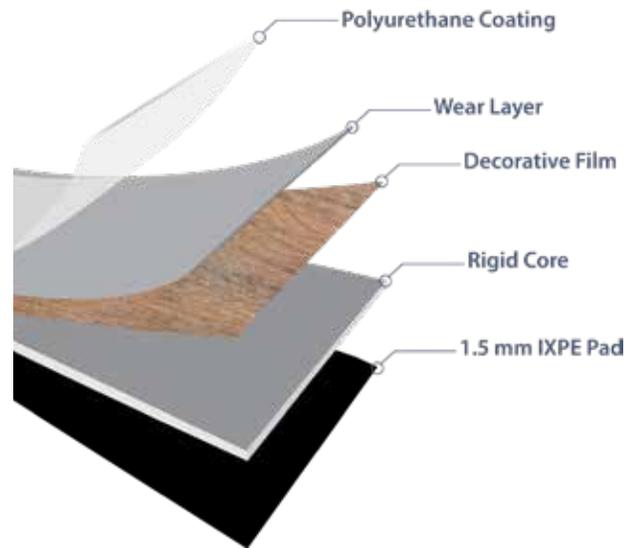

### Warranty


10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential

### Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNoise](#) Stair Nosing

### Layout Options:



ASHLAR



STAGGER



T A S  
CONTRACT  
TASCONTRACT.COM



PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.