



TYSON

SPC | 5.0 MM, 12 MIL

TAS
CONTRACT

[TASCONTRACT.COM](https://tascontract.com)


TYSON

SPC | 5.0 MM, 12 MIL | 7" X 48"



SOUND **ABSORPTION:**

An attached premium IXPE pad reduces sound transfer and provides added comfort underfoot, enhancing the overall living experience.



DURABLE CONSTRUCTION

Featuring a rigid core with a 5.0 mm overall thickness (4 mm core + 1 mm IXPE pad), the Tyson Collection is built for durability and long-lasting performance.



PROTECTIVE WEAR LAYER

With a 12 mil wear layer and a polyurethane coating, this flooring provides robust protection against daily wear and tear, making it suitable for light commercial and multi-family applications.



MICRO BEVEL EDGES

The micro bevel edges enhance the visual appeal of the flooring, adding a subtle depth and dimension to each plank.

TRIMS & TRANSITIONS

- T-Mold
- Endcap
- Reducer
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





CHALUS HAZELWOOD
SPC RIGID CORE

PPRC0101
5.0 MM | 12 MIL



DAVOS OAK
SPC RIGID CORE

PPRC0102
5.0 MM | 12 MIL



FENWICK OAK
SPC RIGID CORE

PPRC0103
5.0 MM | 12 MIL



SARA BIRCH
SPC RIGID CORE

PPRC0104
5.0 MM | 12 MIL



TROPICAL ACACIA
SPC RIGID CORE

PPRC0105
5.0 MM | 12 MIL



WOODEN OAK
SPC RIGID CORE

PPRC0106
5.0 MM | 12 MIL



BEACON OAK
SPC RIGID CORE

PPRC0107
5.0 MM | 12 MIL



ALCOVE OAK
SPC RIGID CORE

PPRC0108
5.0 MM | 12 MIL



MEDALLION OAK
SPC RIGID CORE

PPRC0109
5.0 MM | 12 MIL



NORDLAND HICKORY
SPC RIGID CORE

PPRC0110
5.0 MM | 12 MIL



COLLINS
SPC RIGID CORE

PPRC0111
5.0 MM | 12 MIL

SPC | 5.0 MM, 12 MIL

Construction	SPC Rigid Waterproof Core Vinyl Click
Classification	ASTM F3261
Dimensions	7" Wide x 48" Long, 182 mm x 1220 mm
Overall Thickness	5.0 mm (includes 1.0 mm IXPE Pad)
Attached Pad	1.0 mm IXPE Sound Abatement Pad
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Micro Bevel
Packaging	28.68 sf/ctn, 12 pcs/ctn, 48.5 lbs/ctn, 55 ctn/plt, 1577.4 sf/plt

Installation & Maintenance

Angle / Angle

Layout Room size: Minimum expansion space to all vertical substrates 1/4"
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.

Test Method & Requirements


Resilient Floor in Modular Format	ASTM F3261	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load	ASTM F970	>250
Static Load Limit	ASTM F970	0.005 in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified

GreenGuard Gold

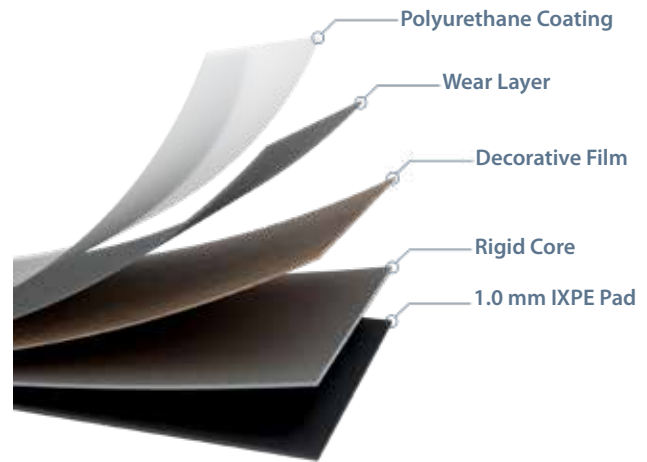

Warranty


5 Year Light Commercial, 25 Year Multifamily (units), 5 Year Multifamily (common areas) & 25 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:

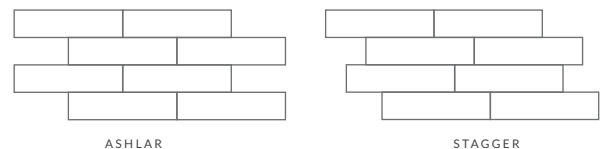

TAS
CONTRACT
TASCONTRACT.COM

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.