

BUILDER'S SELECT



SPC | 5 MM, 20 MIL

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	9" Wide x 60" Long (228 mm x 1500 mm)
Overall Thickness	5 mm (Includes 1 mm Pad)
Attached Pad	1 mm IXPE Pad
Wear Layer	20 Mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Painted Bevel
Packaging	22.09 sf/ctn, 6 pcs/ctn, 37.7 lbs/ctn, 52 ctn/plt, 1148.7 sf/plt

Installation & Maintenance

Angle / Angle

Expansion & Transition: Transition Required for rooms Larger than: (50) L x (50) W
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface: Acclimate product to environment. Work out of multiple boxes
Subfloors dry and flat (3/16" in 10'),
Radiant Heat approved: Yes
Water based system only. Max temp 85 degrees

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.


Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified
Phthalate Free

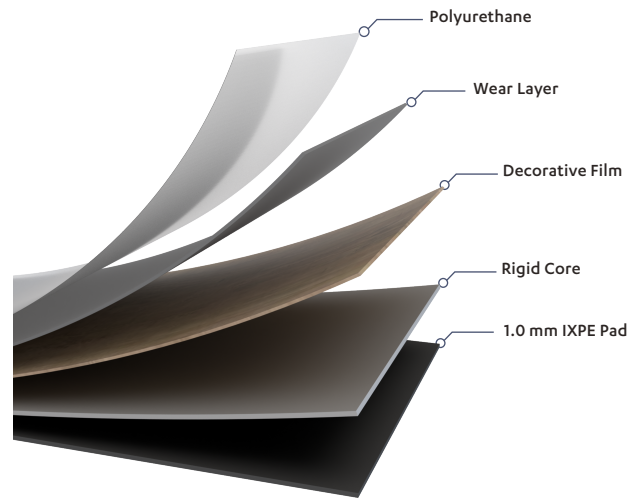


Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential


Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNoise](#) Stair Nosing

Layout Options



ASHLAR



STAGGER

