

BOREALIS BEYOND

SPC | 7.0 MM, 20 MIL

TAS CONTRACT

TASCONTRACT.COM

BOREALIS BEYOND

SPC | 7.0 MM, 20 MIL



WATERPROOF CONFIDENCE, BUILT IN

Constructed with a durable SPC waterproof core and finished with a polyurethane wear layer, Borealis Beyond is engineered to perform in moisture-prone environments common in multifamily living.

GENEROUS FORMAT WITH TEXTURED DETAIL

Each 7" x 60" plank features an embossed surface and painted bevel edge, adding dimensional depth and character to multifamily interiors.

QUIET & COMFORTABLE UNDERFOOT

A 1.5 mm IXPE attached pad provides acoustic insulation and added underfoot comfort—helping reduce noise between units while simplifying installation.

EFFICIENT, RELIABLE INSTALLATION

An angle/angle click system ensures a secure fit and faster installs—ideal for keeping multifamily projects on schedule and within budget.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Quarter Round
- Star Noise
- Q nose

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.



QNose

FULL INSTALLATION INSTRUCTIONS, MAINTENANCE, AND WARRANTY INFORMATION ARE AVAILABLE AT TASCONTRACT.COM



NORTHERN
LUXURY VINYL

NFRC0401
7.0 MM | 20 MIL





DRAGONFLY
LUXURY VINYL

NFRC0402
7.0 MM | 20 MIL



LUMINOUS
LUXURY VINYL

NFRC0403
7.0 MM | 20 MIL



FORMOSA
LUXURY VINYL

NFRC0404
7.0 MM | 20 MIL



DUSK
LUXURY VINYL

NFRC0405
7.0 MM | 20 MIL



DAWN
LUXURY VINYL

NFRC0406
7.0 MM | 20 MIL



CABANA
LUXURY VINYL

NFRC0407
7.0 MM | 20 MIL



WINDWARD
LUXURY VINYL


NFRC0408
7.0 MM | 20 MIL

BOREALIS BEYOND

PACIFIC SUMMIT

SPC | 7.0 MM, 20 MIL

Construction	SPC Waterproof Core Vinyl Click
Classification	ASTM F3261
Dimensions	7" x 60"
Overall Thickness	7.0 mm (includes 1.5 mm IXPE pad)
Wear Layer	20 mil
Finish	Polyurethane
Texture	Embossed
Edge Profile	Painted Bevel
Packaging	17.915 sf/ctn, 6 pcs/ctn, 43.5 lbs/ctn, 55 ctn/plt, 985.33 sf/plt

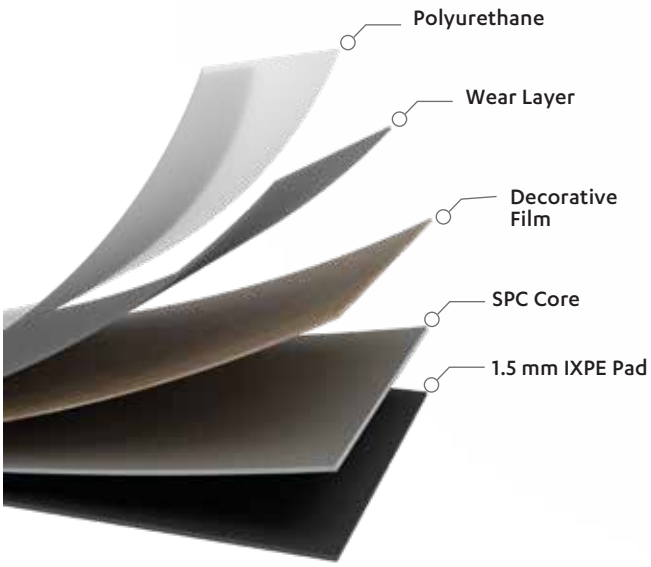

Installation & Maintenance

Angle / Angle

Transition Required for rooms Larger than: (50) L x (50) W
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Neutral pH Cleaner

Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load Limit	ASTM F970	0.005 in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

FloorScore SCScertified


Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential


Accesories

End Cap, Quarter Round, Stair Nose, Reducer, T-Mold, Q Nose

Layout Options:



ASHLAR



STAGGER


floor score SCScertified

WATER PROOF

STOCKED IN KENT

TAS
CONTRACT

TASCONTRACT.COM

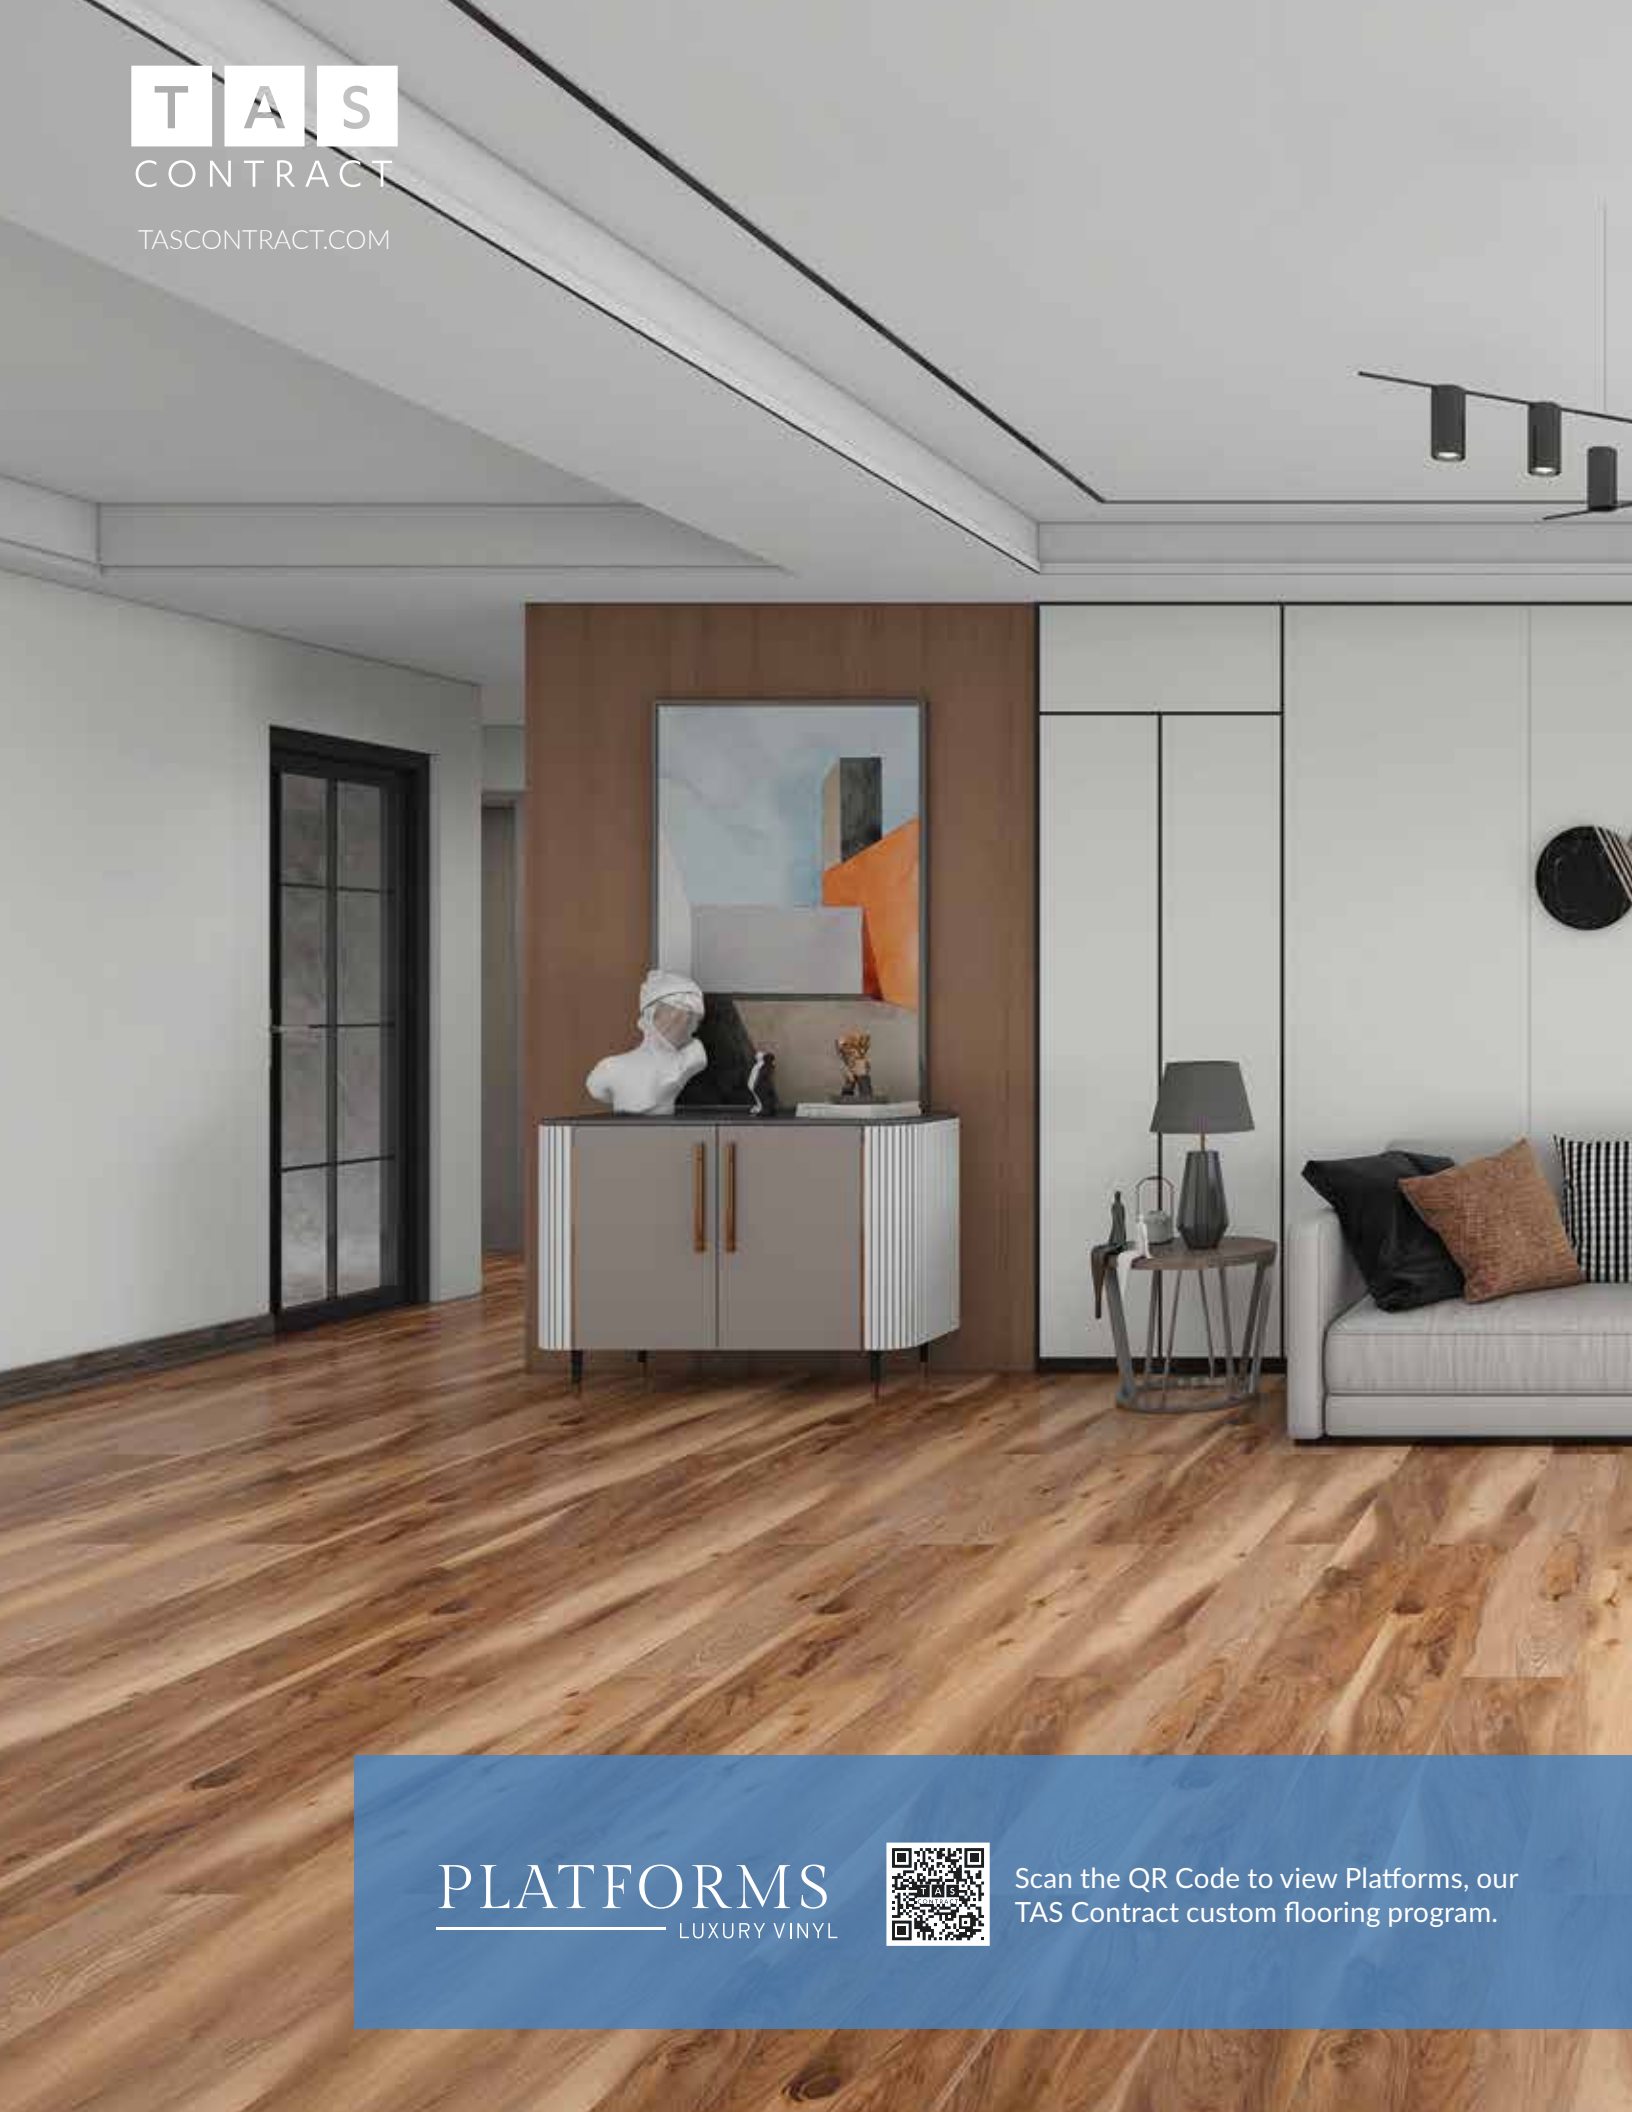

PLATFORMS

LUXURY VINYL

Scan the QR Code to view Platforms, our TAS Contract custom flooring program.