



BOREALIS BEYOND

SPC | 7.0 MM, 20 MIL

TAS
CONTRACT
[TASCONTRACT.COM](https://tascontract.com)

BOREALIS BEYOND

SPC | 7.0 MM, 20 MIL



WATERPROOF CONFIDENCE, BUILT IN

Constructed with a durable SPC waterproof core and finished with a polyurethane wear layer, Borealis Beyond is engineered to perform in moisture-prone environments common in multifamily living.



GENEROUS FORMAT WITH TEXTURED DETAIL

Each 7" x 60" plank features an embossed surface and painted bevel edge, adding dimensional depth and character to multifamily interiors.



QUIET & COMFORTABLE UNDERFOOT

A 1.5 mm IXPE attached pad provides acoustic insulation and added underfoot comfort—helping reduce noise between units while simplifying installation.



EFFICIENT, RELIABLE INSTALLATION

An angle/angle click system ensures a secure fit and faster installs—ideal for keeping multifamily projects on schedule and within budget.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Quarter Round
- Star Noise
- Q nose

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





NORTHERN
LUXURY VINYL

NFRC0401
7.0 MM | 20 MIL



DRAGONFLY
LUXURY VINYL

NFRC0402
7.0 MM | 20 MIL



LUMINOUS
LUXURY VINYL

NFRC0403
7.0 MM | 20 MIL



FORMOSA
LUXURY VINYL

NFRC0404
7.0 MM | 20 MIL



DUSK
LUXURY VINYL

NFRC0405
7.0 MM | 20 MIL



DAWN
LUXURY VINYL

NFRC0406
7.0 MM | 20 MIL



CABANA
LUXURY VINYL

NFRC0407
7.0 MM | 20 MIL



WINDWARD
LUXURY VINYL

NFRC0408
7.0 MM | 20 MIL

BOREALIS BEYOND



SPC | 7.0 MM, 20 MIL

Construction	SPC Waterproof Core Vinyl Click
Classification	ASTM F3261
Dimensions	7" x 60"
Overall Thickness	7.0 mm (includes 1.5 mm IXPE pad)
Wear Layer	20 mil
Finish	Polyurethane
Texture	Embossed
Edge Profile	Painted Bevel
Packaging	17.915 sf/ctn, 6 pcs/ctn, 43.5 lbs/ctn, 55 ctn/plt, 985.33 sf/plt

Installation & Maintenance

Angle / Angle

Transition Required for rooms Larger than: (50) L x (50) W
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Neutral pH Cleaner


Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load Limit	ASTM F970	0.005 in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

FloorScore SCS certified

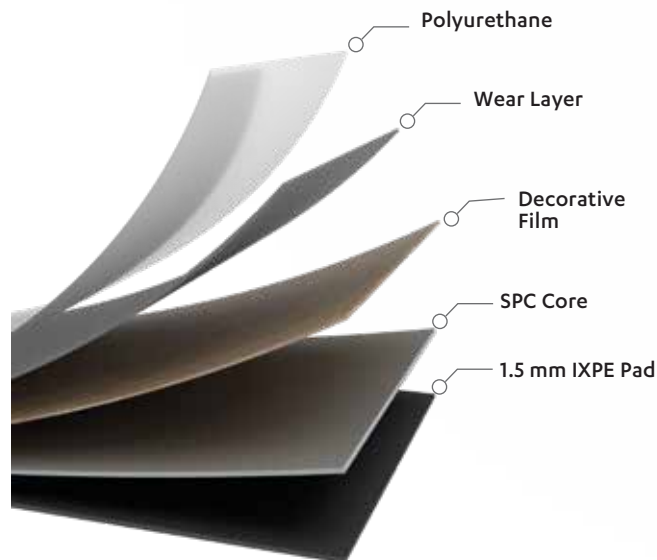


Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential


Accessories

End Cap, Quarter Round, Stair Nose, Reducer, T-Mold, Q Nose

Layout Options:



ASHLAR



STAGGER



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.