

# LEVELS 2.5



GLUE DOWN | 2.5 MM, 20 MIL

Construction	Luxury Vinyl Tile
Classification	ASTM F1700, Class III, Type A
Dimensions	7" Wide x 48" Long, 177.8 mm x 1219.2 mm
Overall Thickness	2.5 mm
Wear Layer	20 mil
Finish Coat	EnduraGuard
Texture	Embossed
Edge Profile	Square Edge
Packaging	35 sf/ctn, 60 ctn/plt, 2100 sf/plt

## Installation & Maintenance

Method: Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as TAS Flooring Fresh Floors

Recommended Adhesives: - Dynamic, Transitional Pressure Sensitive, firm set  
- Pinnacle, Premium Transitional Pressure Sensitive, hard set


## Test Method & Requirements

Flexibility	ASTM F137	Pass
Thickness (with Pad)	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Change	ASTM F1514	Pass
Resistance to Light Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Static Coefficient of Polished Surface	ASTM D2047	Exceeds
Flammability/Radiant Flux	ASTM E648	Class I
Static Load	ASTM E970	Pass>250 lbs
Peel Resistance	ISO 24345	Pass

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing

## Health & Environmental

FloorScore SCS Certified  
Ortho-Phthalate

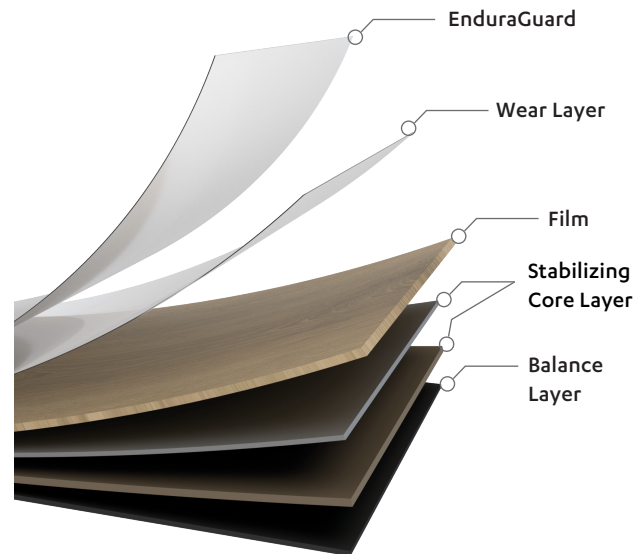

## Warranty


10 Year Commercial

## Accessories


[QNose](#) Stair Nose

## Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER

