LEVELS 2.5

GLUE DOWN | 2.5 MM, 20 MIL

Construction	Luxury Vinyl Tile
Classification	ASTM F1700, Class III, Type A
Dimensions	7" Wide x 48" Long, 177.8 mm x 1219.2 mm
Overall Thickness	2.5 mm
Wear Layer	20 mil
Finish Coat	ENDURAGUARD SURFACE PROTECTION
Texture	Embossed
Edge Profile	Square Edge
Packaging	35 sf/ctn, 60 ctn/plt, 2100 sf/plt

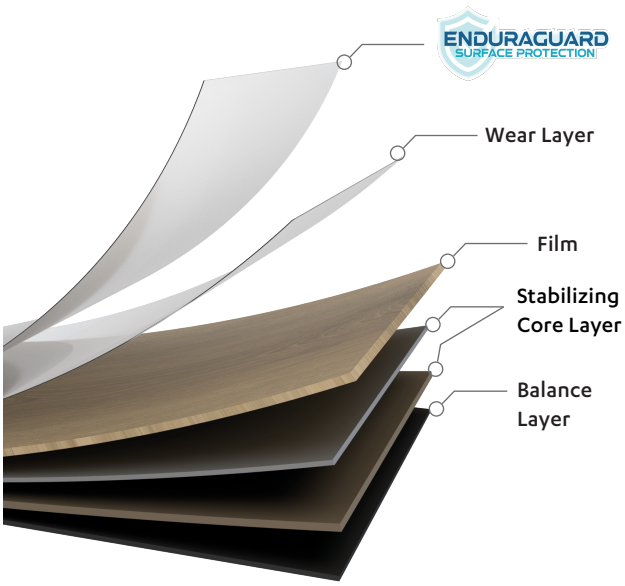

Installation & Maintenance

Method: Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as TAS Flooring Fresh Floors

Recommended Adhesive: WF Taylor Dynamic, Uzin KE39.
For Heavy Loads use WF Taylor Pinnacle

Test Method & Requirements

Flexibility	ASTM F137	Pass
Thickness (with Pad)	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Change	ASTM F1514	Pass
Resistance to Light Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Static Coefficient of Polished Surface	ASTM D2047	Exceeds
Flammability/Radiant Flux	ASTM E648	Class I
Static Load	ASTM E970	Pass>250 lbs
Peel Resistance	ISO 24345	Pass

**The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing*

Health & Environmental

FloorScore SCS Certified
Ortho-Phthalate

Warranty

10 Year Commercial

Accessories

QNose Stair Nose

Layout Options: NOT TO SCALE


HERRINGBONE


TRIPLE HERRINGBONE


FIVE PLANK PARQUET


ASHLAR


STAGGER

Hydronic Heat

Waterproof

Glue