



SILENT STRIDE

SPC | 8.5 MM, 20 MIL

TAS

CONTRACT

TASCONTRACT.COM

SILENT STRIDE

SPC | 8.5 MM, 20 MIL



ACOUSTIC COMFORT FOR SHARED LIVING

Silent Stride's innovative triple-layer core structure reduces both impact and in-room sound, creating quieter, more peaceful multifamily environments—ideal for reducing the everyday noise of modern living.



SOUND ABSORPTION INSPIRED BY PERFORMANCE HALLS

The silent core layer features micro-pore technology that disrupts and softens sound waves—minimizing the echo and amplification common in hard-surface floors like ceramic tile.



SOFT UNDERFOOT, BUILT TO LAST

With a cushioned core and soft LVT surface, Silent Stride delivers superior underfoot comfort without compromising durability—ideal for high-traffic, multi-unit settings.



WATERPROOF & SCRATCH-RESISTANT PERFORMANCE

Engineered with a commercial-rated wear layer and Adamantine™ finish, Silent Stride offers robust surface protection and moisture resistance, making it a smart, low-maintenance solution for busy residential spaces.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





RESERVE
LUXURY VINYL

DGRC0901
8.5 MM | 20 MIL



CANARD
LUXURY VINYL

DGRC0902
8.5 MM | 20 MIL



BELIE
LUXURY VINYL

DGRC0903
8.5 MM | 20 MIL



MURMUR
LUXURY VINYL

DGRC0904
8.5 MM | 20 MIL



QUELL
LUXURY VINYL

DGRC0905
8.5 MM | 20 MIL



PLACID
LUXURY VINYL

DGRC0906
8.5 MM | 20 MIL



CONTENT
LUXURY VINYL

DGRC0907
8.5 MM | 20 MIL



SUBTLE
LUXURY VINYL

DGRC0908
8.5 MM | 20 MIL



WHISPER
LUXURY VINYL

DGRC0909
8.5 MM | 20 MIL

SILENT STRIDE

SPC | 8.5 MM, 20 MIL

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	9" Wide x 60" Long, 225 mm x 1,422 mm
Overall Thickness	8.5 mm (Includes 1.0 mm Pad)
Attached Pad	1.0 mm IXPE
Wear Layer	20 Mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	14.53 sf/ctn, 4 pcs/ctn, 41 lbs/ctn, 56 ctn/plt, 813.68 sf/plt

Installation & Maintenance

Angle / Angle

Layout Room Size: Minimum expansion space to all vertical substrates 1/4".
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.


Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore® program by SCS Global Services
Phthalate Free

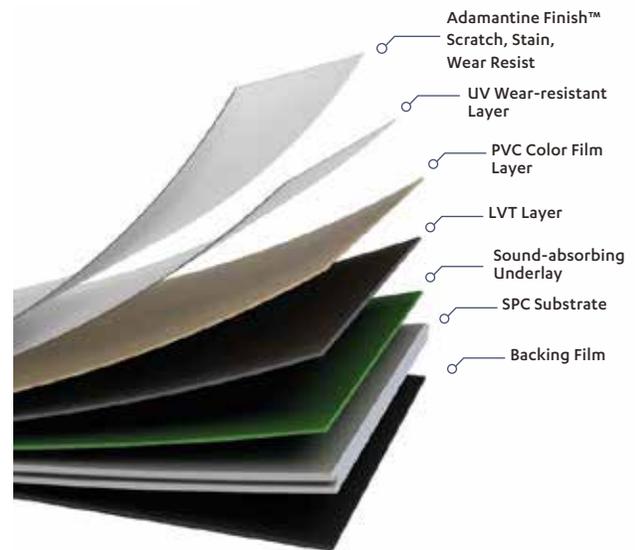


Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNoise](#) Stair Nosing

Layout Options



ASHLAR



STAGGER

T A S

CONTRACT

TASCONTRACT.COM



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.